

4641


4641

 TRIODE  
 (E)

Vf	=	4,0	V.
If	=	2,0	A.
V <sub>a</sub> (max)	=	1.000	1.000
I <sub>a</sub>	=	2 × 25	2 × 25
V <sub>g1</sub>	=	-82	-96
R <sub>a</sub>	=	40	18
R <sub>k</sub>	=	1.600	Ω
W <sub>o</sub>	=	27,5(1)	43(2)
			Wtt.

(1) d % = 1.

(2) d % = 4,8.

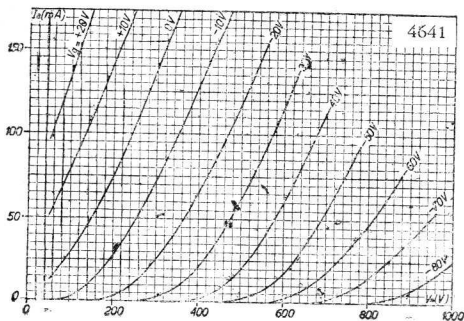

4641