

$\approx$ 16,5-51 m (18,2-5,88 Mc/s)
 196-570 m (1530-522 kc/s)
 750-1910 m (400-157 kc/s)


$\approx$ 9606 U-50 Z = 5 Ω
 $\approx$ 110 V, 125 V, 220 V.

452 kc/s


± 34 W

196-570 m	750-1910 m	16.5-51 m
VOL. max C6, C8 + 15° 1450 kc/s— C38 max C18 max	VOL. max 1875 m (160 kc/s) 160 kc/s— C50 max	VOL. max 17,8 Mc/s— C6, C8 17,8 Mc/s C14 max

15° 09 992 50.0

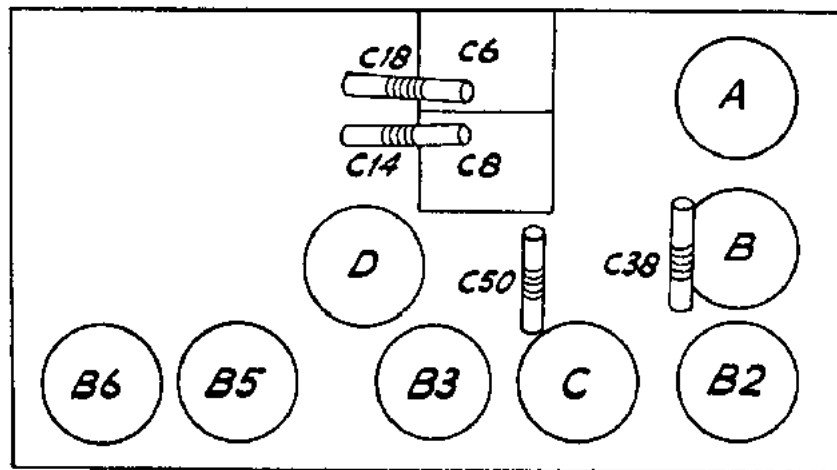

R14116

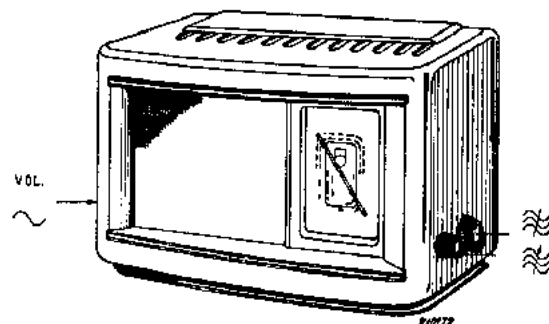


1943

R11	0,45 + 0,05 M	49 500 23.0	C1	27 μ F	49 021 03.0
R31	0,82 M Ω	48 557 10/820K	C2	2,5 μ F	49 021 04.1
R32	10 K Ω	48 557 10/10K	C3	2,5 μ F	49 021 04.1
R33	68 K Ω	48 557 10/68K	C6	11-400 pF	A9 863 99.0
R34	1,5 M Ω	48 557 10/1M5	C8	11-400 pF	49 005 51.2
R35	6,8 M Ω	48 557 10/6M8	C14	32 pF	49 005 51.2
R36	0,68 M Ω	48 557 10/680K	C18	32 pF	48 203 10/39E
R39	520 Ω		C19	39 pF	48 201 10/22E
R40	600 Ω	49 362 90.2	C20	22 pF	49 005 51.2
R44	75 Ω		C38	32 pF	48 203 10/33E
R45	560 Ω		C40	33 pF	48 203 01/395E
R42	5600 Ω	48 557 10/5K6	C48	395 pF	49 005 53.2
R43	150 Ω	48 494 10/150E	C50	200 pF	—
R46	4700 Ω	48 557 10/4K7	C51	103 pF	—
R75	220 Ω par	48 557 10/220E	C52	103 pF	—
	270 Ω = 120 Ω	48 557 10/270E	C61	103 pF	—
R81	47 K Ω	48 557 10/47K	C62	103 pF	—
R82	470 Ω	48 467 10/470E	C75	100 μ F	48 313 22/100
R100	10 K Ω	48 557 10/10K	C85	4700 pF	48 757 20/4K7
			C100	1000 pF	48 757 20/1K
			C101	100 pF	48 203 10/100E
			C102	470 pF	48 203 10/470E
			C103	82 pF	48 203 10/82E
			C104	47000 pF	48 751 10/47K
			C105	47000 pF	48 750 10/47K
			C106	6800 pF	48 751 10/6K8
			C107	100 pF	48 203 10/100E
			C108	68 pF	48 203 10/68E
			C110	22000 pF	48 756 20/22K
			C111	56 pF	48 203 10/56E
			C112	2,5 μ F	49 021 04.1
			C120	0,1 μ F	48 751 10/100K







	B2	B3	B5	B6	
	UCH 21	UCH 21	UBL 21	UYIN	
V _a	aT = 80 aH = 110	aT = 25 aH = 110	105	—	V
V _{g2(4)}	70	70	115	—	V
V _k	0	0	0	—	V
I _a	aT = 2,8 aH = 1,3	aT = 1,3 aH = 1,9	35	—	mA
I _{g2(4)}	2,6	1,3	5,6	—	mA

VC1 = 145 V, VC2 = 115 V, VC3 = 120 V, VC75 = 6 V, VS71 = 30 V, IS71 = 54 mA.

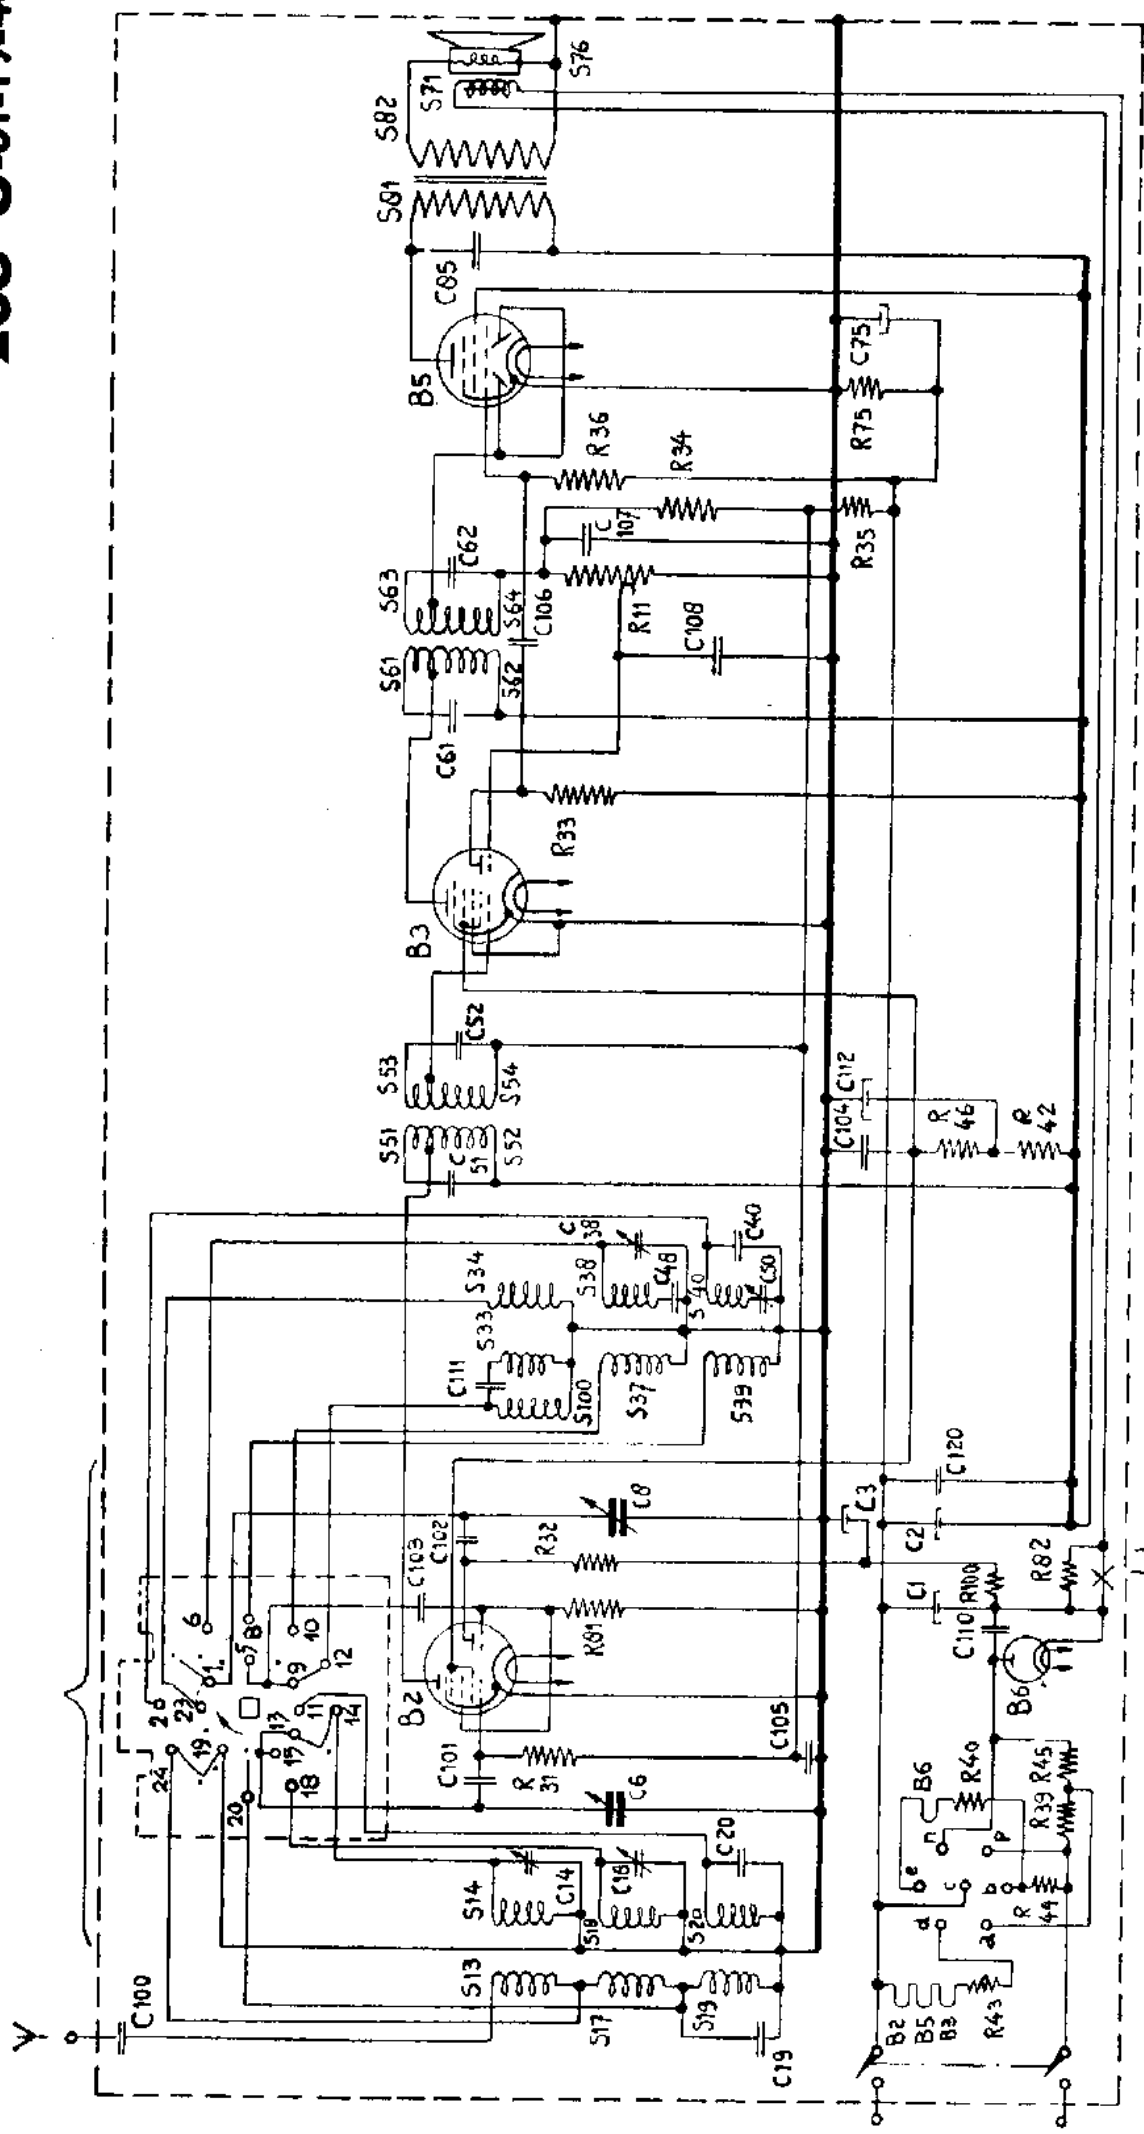


R10153

- UCH 21
- UCH 21
- UBL 21
- UYIN

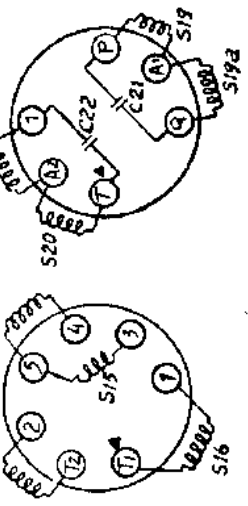


S:	13, 17, 19, 14, 18, 20,	100,	33, 37, 39, 34, 38, 40, 51, 52, 53, 54,	61, 62, 63, 64,	81, 82, 71, 76,
C:	107, 19,	14, 18, 20, 6, 101, 105,	110, 1, 103, 102, 2, 120, 8, 3, 111,	48, 50, 38, 40, 51, 104, 112, 52,	108, 61, 106, 62, 107, 75, 85,
R:	43,	44, 45, 39, 40, 31,	81, 82, 32, 100,	46, 42,	33,
					11, 34, 35, 36, 75,

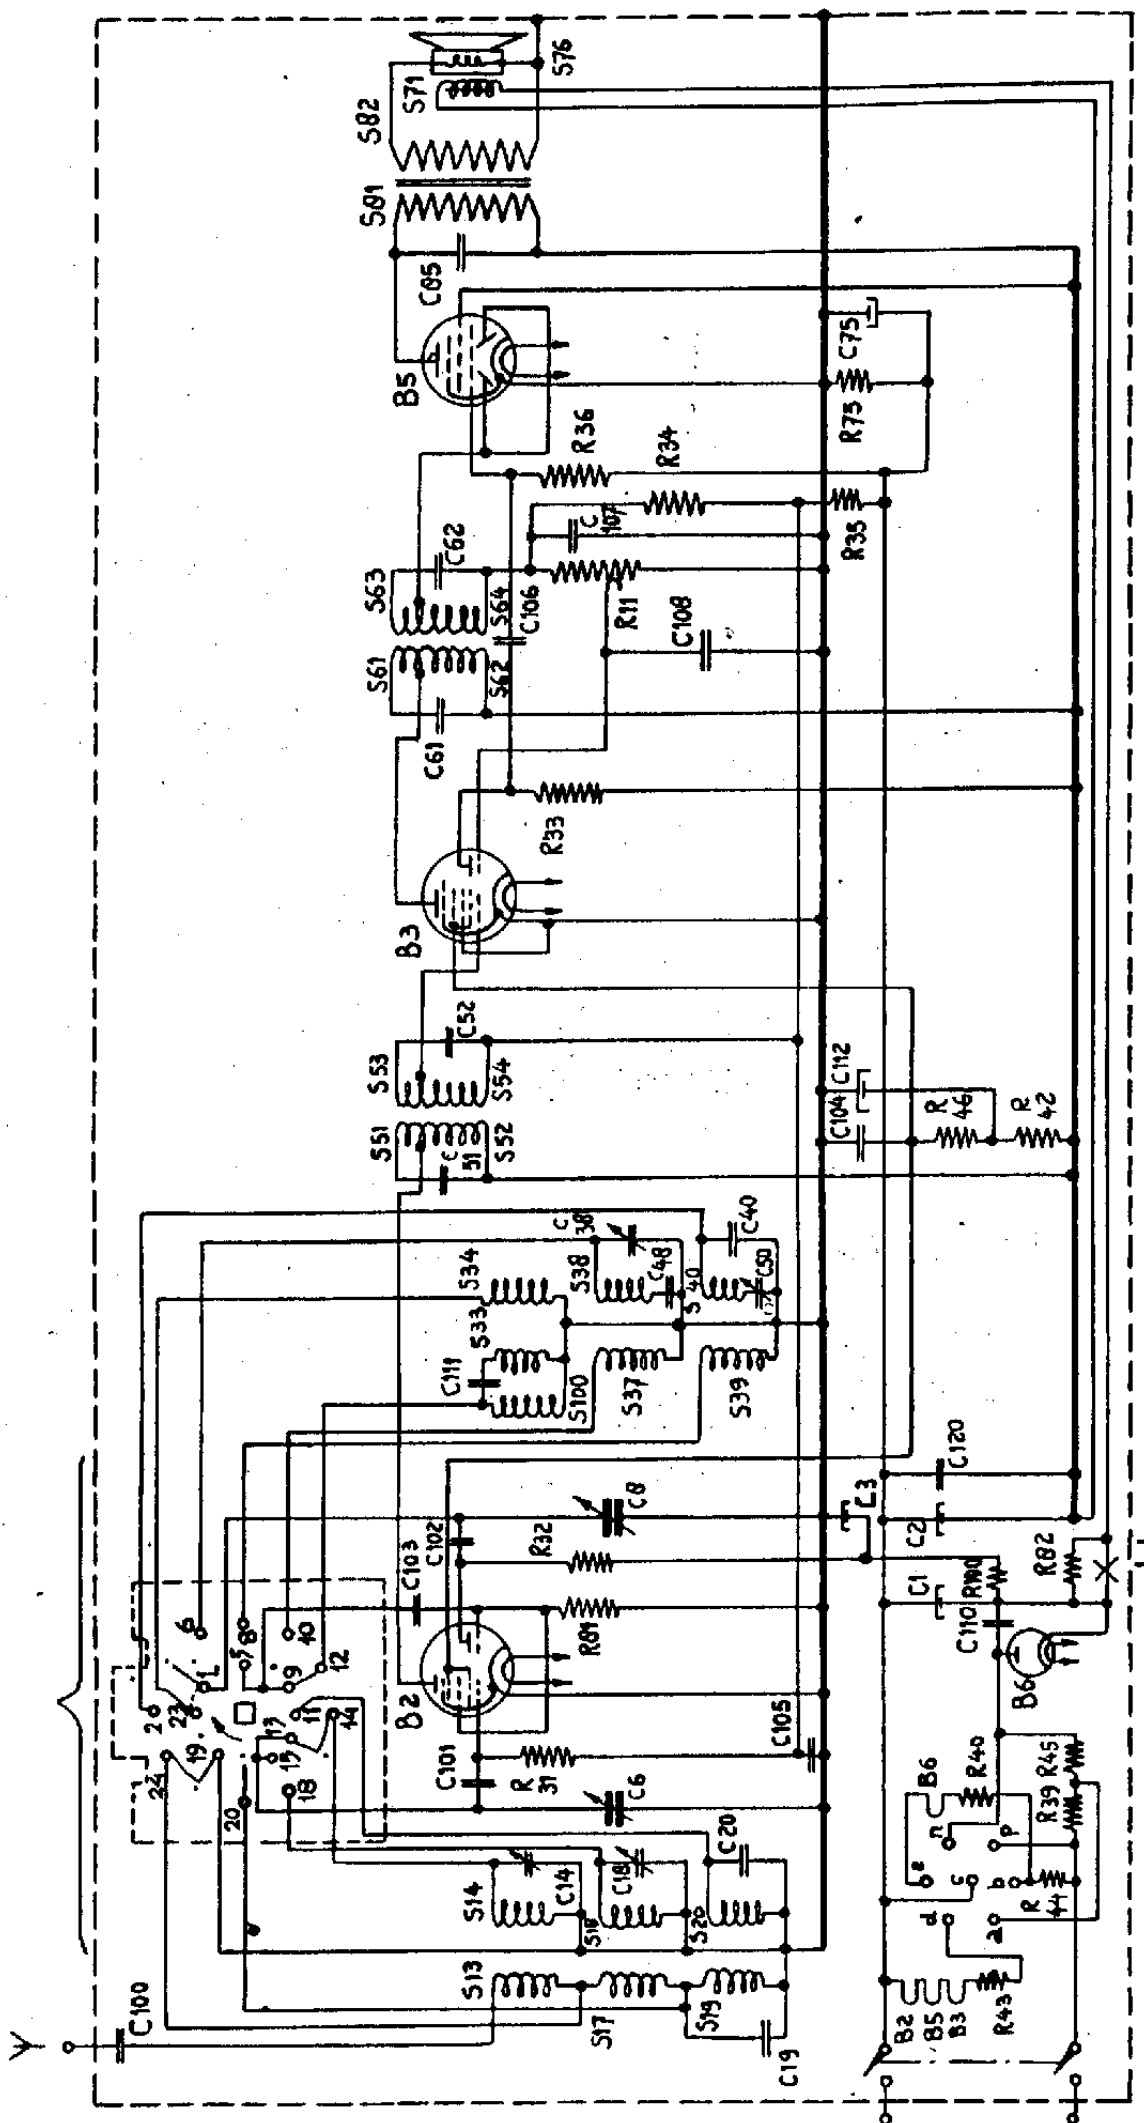

R 10153


A.927
K.853

FIG. 1.

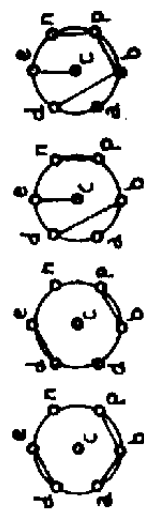


220V~ 220V= 125V~ 110V~

C.	3.75	106.85, 112.2, 108.61, 62.107, 1, 14, 104, 18, 105.6, 8, 40, 50, 20, 52, 102, 101, 51, 103, 38, 48, 19, 111, 52, 54, 40, 52, 51, 39, 19, 20, 13, 38, 34, 33, 37, 14, 18, 17, 60, 0,							
R.	82	100	36	11	33	42, 46, 75, 75a, 75, 34,	32	31	81



A. 951
X. 853

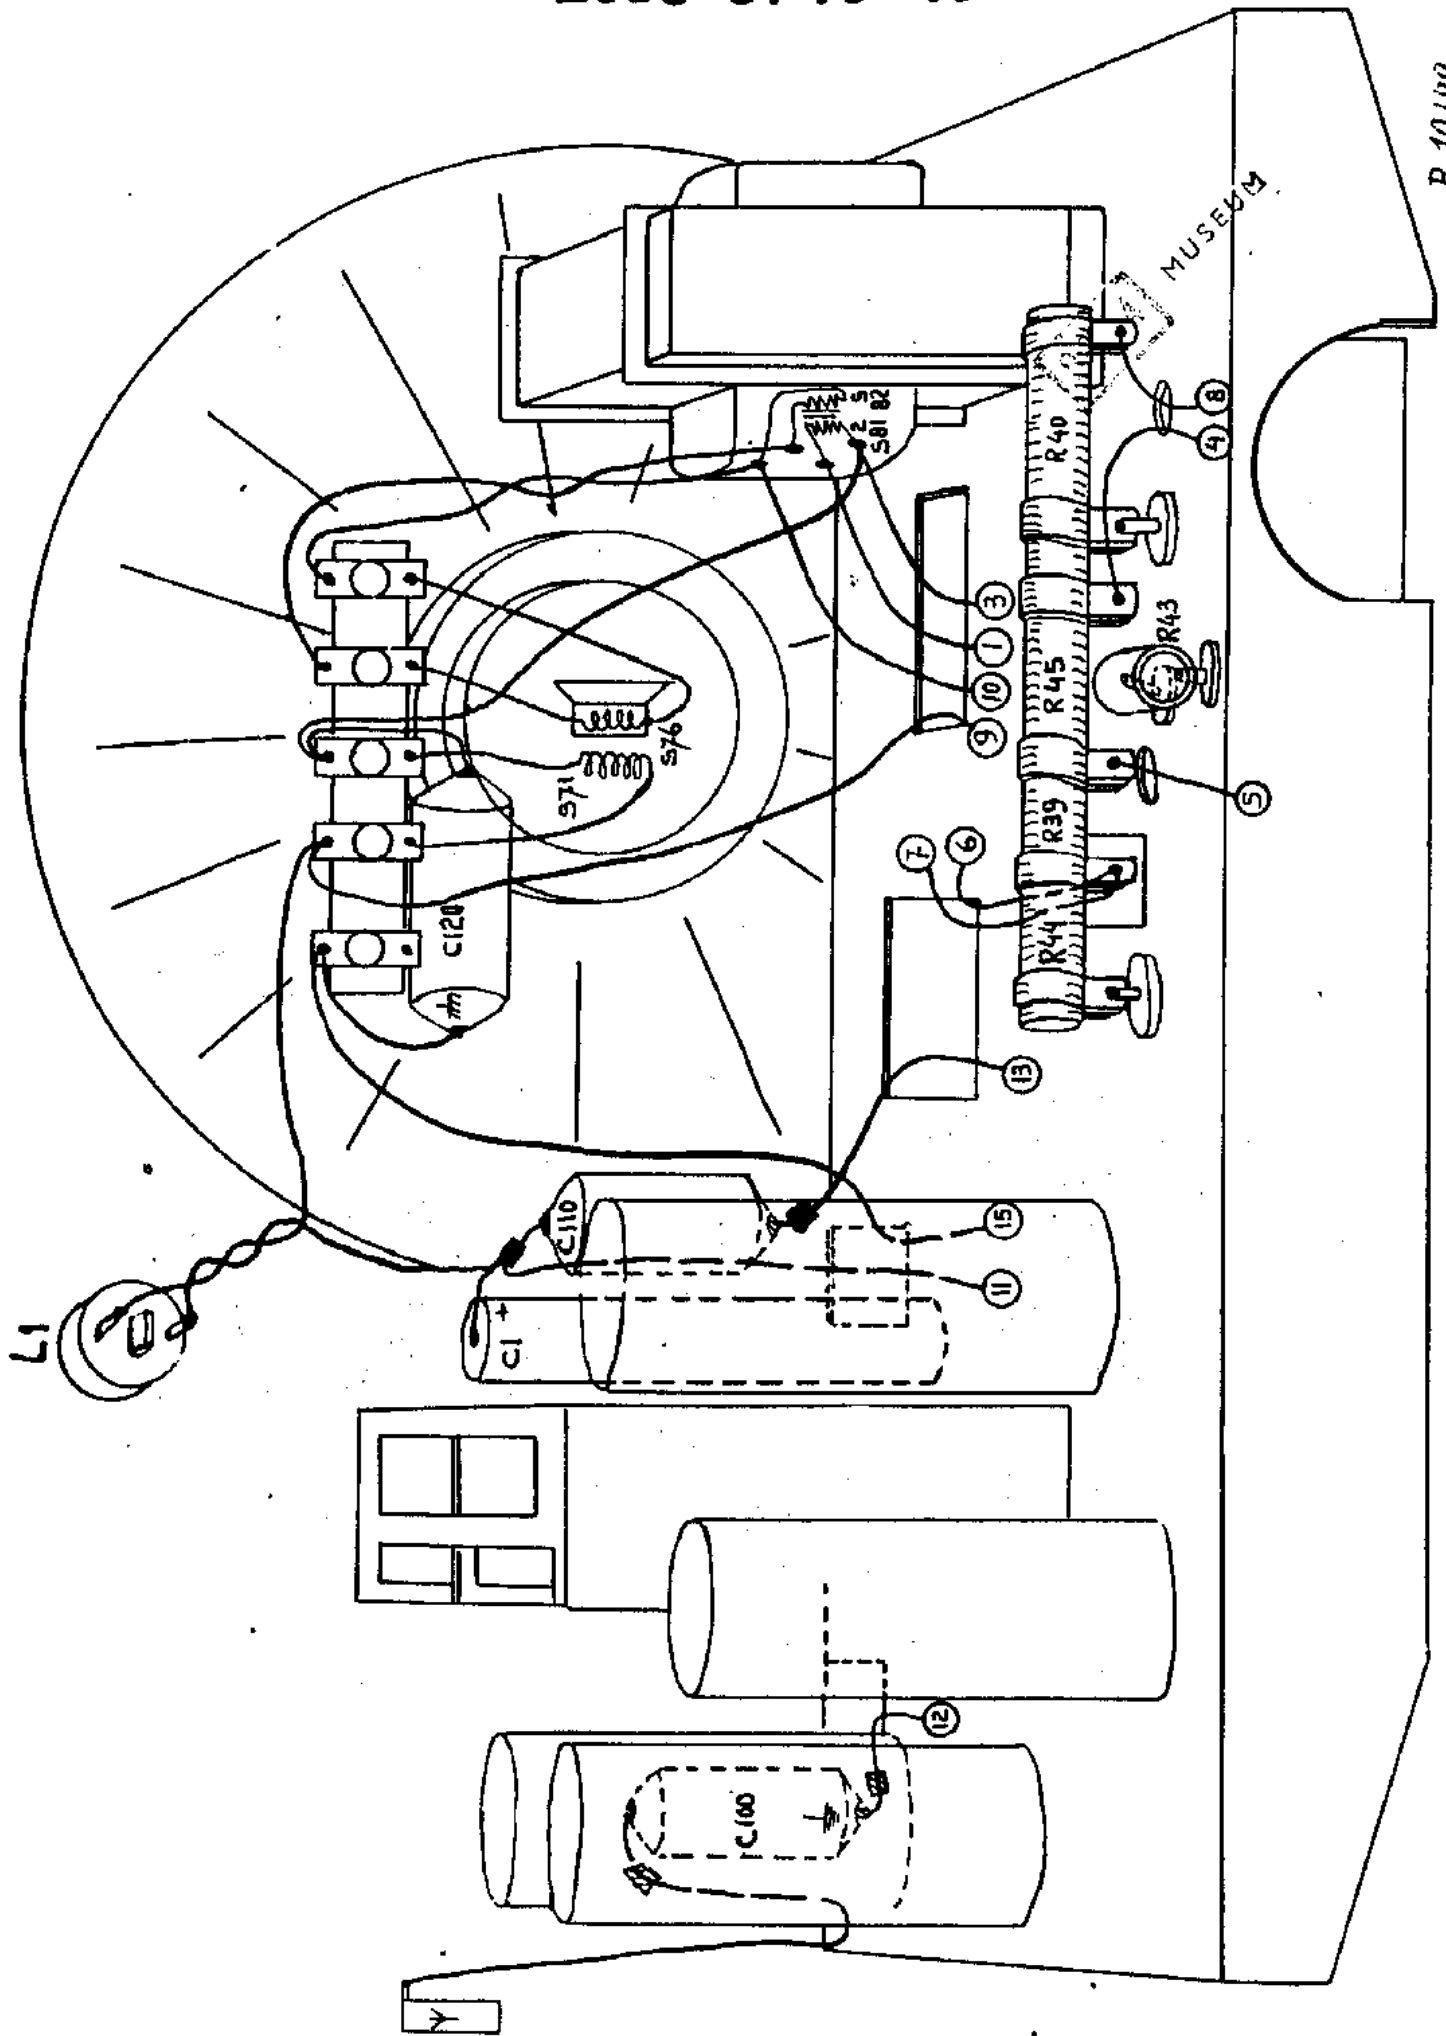

R 10100
A-983
L-853

FIG. 3.



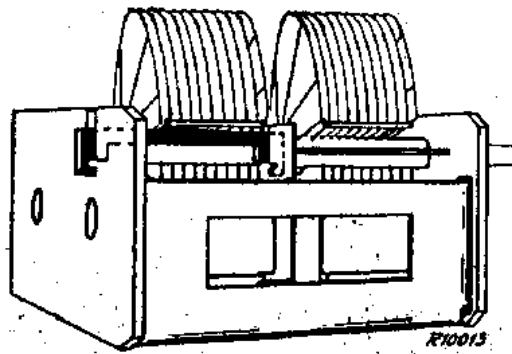


FIG. 5


-01-04-09-12-19-40-
220V~ 220V~

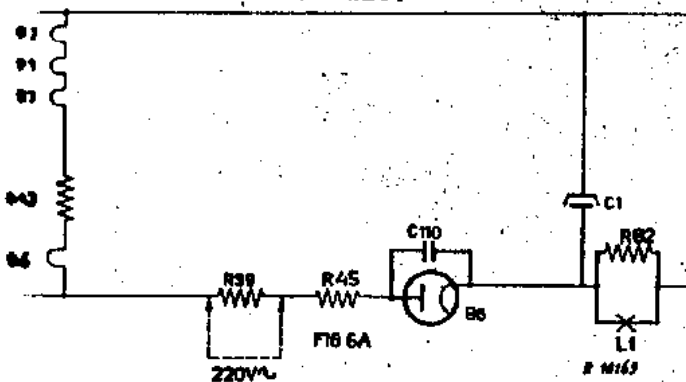

-01-04-09-12-19-40-
110V~ 125V~

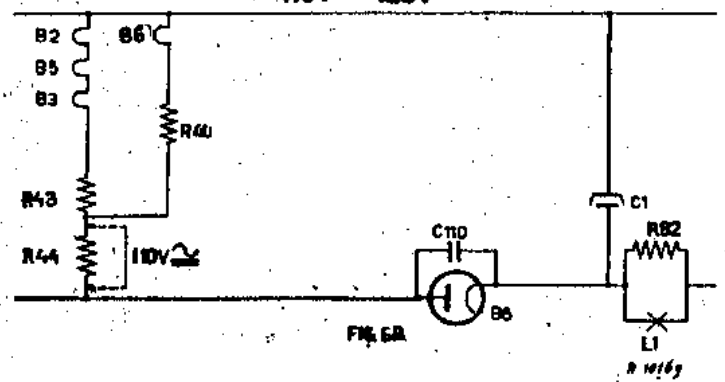


-07-37-
150V~

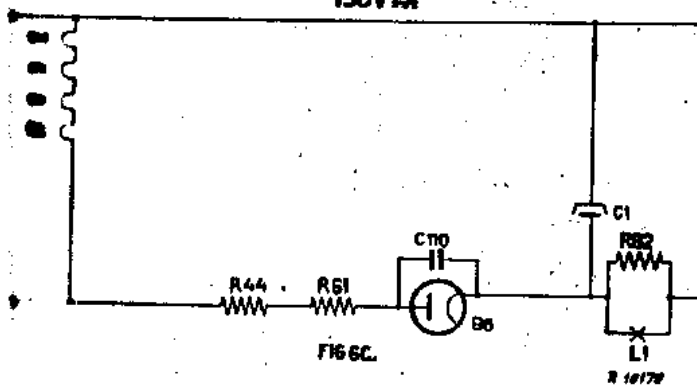

A.956
K.853

-07-37-
220V~ 220V~

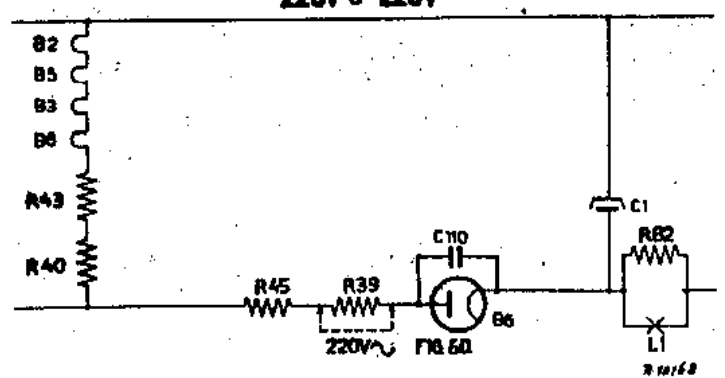

208U-01-19-37-40

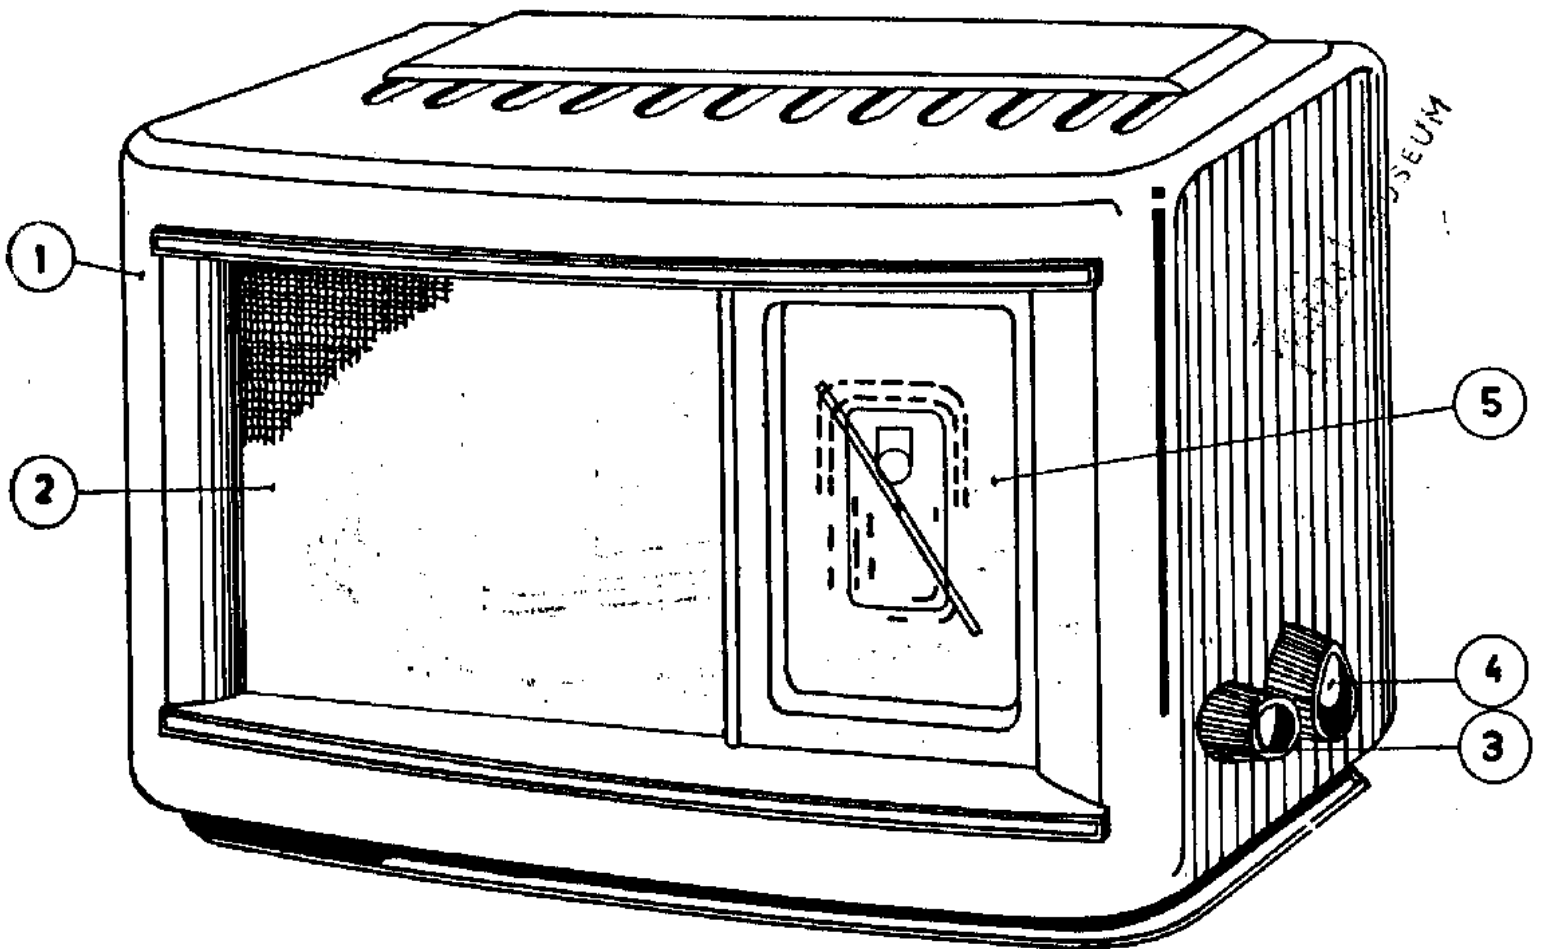


FIG. 7A.

R10172

208U-04-07-09-12

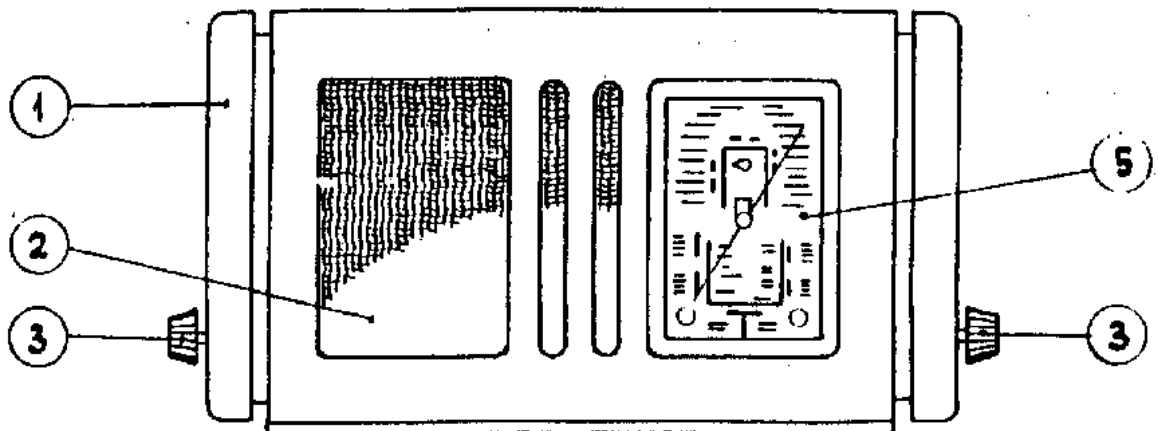


FIG. 7B.

R10173

A-987
K-855