


16.5-51 m (18,2-5,88 Mc/s) 9686 U-50 Z = 5 Ω
 196-570 m (1530-522 kc/s)
 750-1910 m (400-157 kc/s) 110 V, 125 V, 220 V.

452 kc/s

± 34 W.


196-570 m	750-1910 m	16.5-51 m
VOL max C6, C8 + 15° 1450 kc/s — Y C38 max C18 max	VOL max 1875 m (160 kc/s) 160 kc/s — Y C50 max	VOL max 17,8 Mc/s — Y C6, C8 17,8 Mc/s C14 max

15° 09 992 50.0

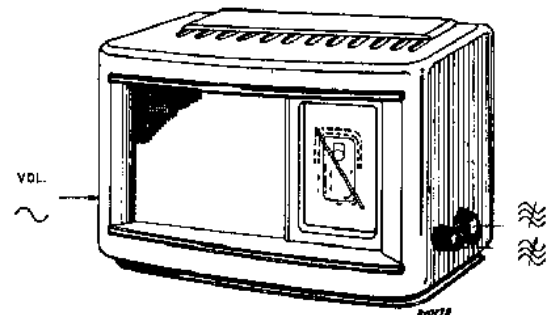

1946

R1	1200 Ω	48 467 10/1K2	C1	50 μF	48 317 08/50+50
R11	0,5 MΩ	49 500 11.0	C2	50 μF	
R12	47 KΩ	48 557 10/47K	C6	11-400 pF	A9 863 99.0
R31	0,82 MΩ	48 557 10/820K	C8	11-400 pF	
R32	10 KΩ	48 557 10/10K	C14	32 pF	49 005 51.2
R33	68 KΩ	48 557 10/68K	C18	32 pF	49 005 51.2
R34	1,5 MΩ	48 557 10/1M5	C19	39 pF	48 203 10/39E
R35	6,8 MΩ	48 557 10/6M8	C20	22 pF	48 201 10/22E
R36	0,68 MΩ	48 557 10/680K	C38	32 pF	49 005 51.2
R39	520 Ω	—	C40	33 pF	48 203 10/33E
R40	600 Ω	49 362 90.2	C48	395 pF	48 203 01/395E
R44	75 Ω	—	C50	200 pF	49 005 53.2
R45	580 Ω	—	C51	103 pF	—
R42	10 KΩ	48 557 10/10K	C52	103 pF	—
R43	150 Ω	48 494 10/150E	C61	103 pF	—
R48	6,8 MΩ	48 557 10/6M8	C62	103 pF	—
R75	220Ω par	48 557 10/220E	C75	125 μF	48 313 22/100
R81	47 KΩ	48 557 10/270E	C85	4700 pF	48 757 20/4K7
R82	390 Ω	48 557 10/47K	C100	1000 pF	48 757 20/1K
		48 467 10/390E	C101	100 pF	48 203 10/100E
			C102	470 pF	48 203 10/470E
			C103	82 pF	48 203 10/82E
			C104	47000 pF	48 751 10/47K
			C105	47000 pF	48 750 10/47K
			C106	6800 pF	48 751 10/6K8
			C107	100 pF	48 203 10/100E
			C108	68 pF	48 203 10/68E
			C110	22000 pF	48 758 10/22K
			C111	56 pF	48 203 10/56E
			C121	22000 pF	48 750 10/22K

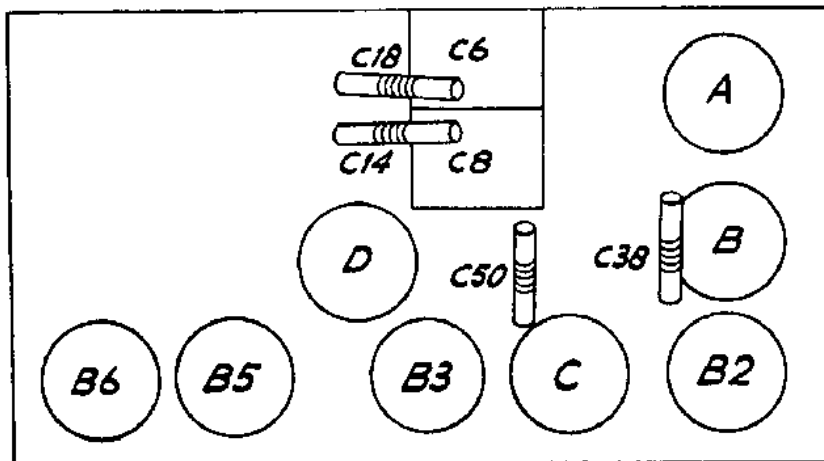

R4116

	B2	B3	B5	B6	
	UCH 21	UCH 21	UDL 21	UYIN	
Va	aT = 80 aH = 110	aT = 25 aH = 110	103	—	V
Vg2(4)	70	70	115	—	V
Vk	0	0	0	—	V
Ia	aT = 2,8 aH = 1,3	aT = 1,3 aH = 1,9	35	—	mA
Ig2(4)	2,6	1,3	5,6	—	mA

VC1 = 145 V, VC2 = 115 V, VC3 = 120 V, VC75 = 6 V, VS71 = 30 V, IS71 = 54mA.

