

16,5-51 m (18,2-5,88 Mc/s)
 196-570 m (1530-522 kc/s)
 750-1910 m (400-157 kc/s)

9686 U-50 Z = 5 Ω


110 V, 125 V, 220 V.

432 kc/s

+34 W.


196-570 m	III	750-1910 m	III
VOL max		VOL max	
C6, C8 + 15°		1875 m (160 kc/s)	
1500 kc/s—		160 kc/s—	
C38 max		C50 max	
C18 max			

15° 09 992 50.0

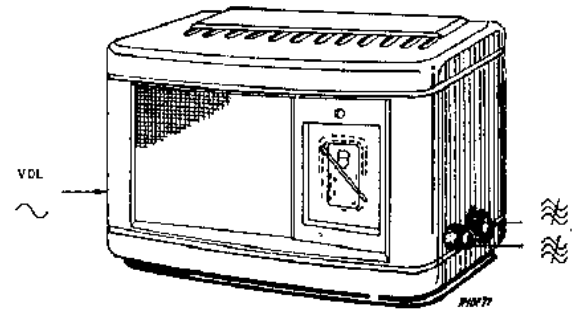

1943

R11	0,45 + 0,05M	49 500 23.0	C1	27 μF	49 021 03.0
R31	0,82 MΩ	48 557 10/820K	C2	2 x 2,5 μF	49 021 04.0
R32	10 KΩ	48 557 10/10K	C6	11-400 pF	A9 863 99.0
R33	68 KΩ	48 557 10/68K	C8	11-400 pF	48 201 10/10E
R34	1,5 MΩ	48 557 10/1M5	C14	10 pF	49 005 51.2
K35	6,8 MΩ	48 557 10/6M8	C18	32 pF	48 203 10/39E
R36	0,68 MΩ	48 557 10/680K	C19	39 pF	48 201 1 E
R39	520 Ω		C20	12 pF	49 005 5.
R40	600 Ω	49 362 90.2	C38	32 pF	48 201 05/22E
R44	75 Ω		C40	22 pF	48 203 01/382E
R45	580 Ω		C48	382,5 pF	49 005 52.2
R41	27 KΩ	48 557 10/27K	C50	125 pF	—
R42	5600 Ω	48 557 10/5K6	C51	103 pF	—
R43	150 Ω	48 494 10/150E	C52	103 pF	—
R46	4700 Ω	48 557 10/4K7	C61	103 pF	—
R47	56 KΩ	48 557 10/56K	C62	103 pF	—
R75	220Ω par 270Ω = 120Ω	48 557 10/220F 48 557 10/270E	C75	100 μF	48 313 22/100
R81	47 KΩ	48 557 10/47K	C85	4700 pF	48 757 20/4K7
			C100	1000 pF	48 757 20/1K
			C101	100 pF	48 203 10/100E
			C102	470 pF	48 203 10/470E
			C103	47 pF	48 203 10/47E
			C104	47000 pF	48 751 10/47K
			C105	47000 pF	48 750 10/47K
			C106	6800 pF	48 751 10/6K8
			C107	100 pF	48 203 10/100E
			C108	68 pF	48 203 10/68E
			C109	1000 pF	48 751 20/1K
			C110	22000 pF	48 758 20/22K
			C112	2,5 μF	49 021 04.1
			C120	0,1 μF	48 751 10/100K

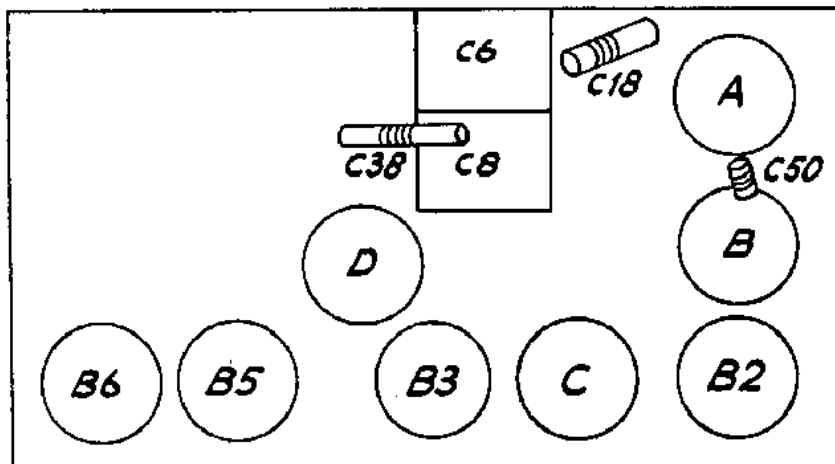


R4121


	B2	B3	B5	B6	
	UCH 21	UCH 21	UBL 21	UYIN	
Va	aT= 80 aH=110	aT= 25 aH=110	105	—	V
Vg2(4)	70	70	115	—	V
Vk	0	0	0	—	V
Ia	aT= 2,8 aH= 1,3	aT= 1,3 aH= 1,9	35	—	mA
Ig2(4)	2,6	1,3	5,6	—	mA

VC1 = 145 V, VC2 = 115 V, VC3 = 120 V, VC75 = 6 V, VS71 = 30 V, IS71 = 54mA.

93953.16.1

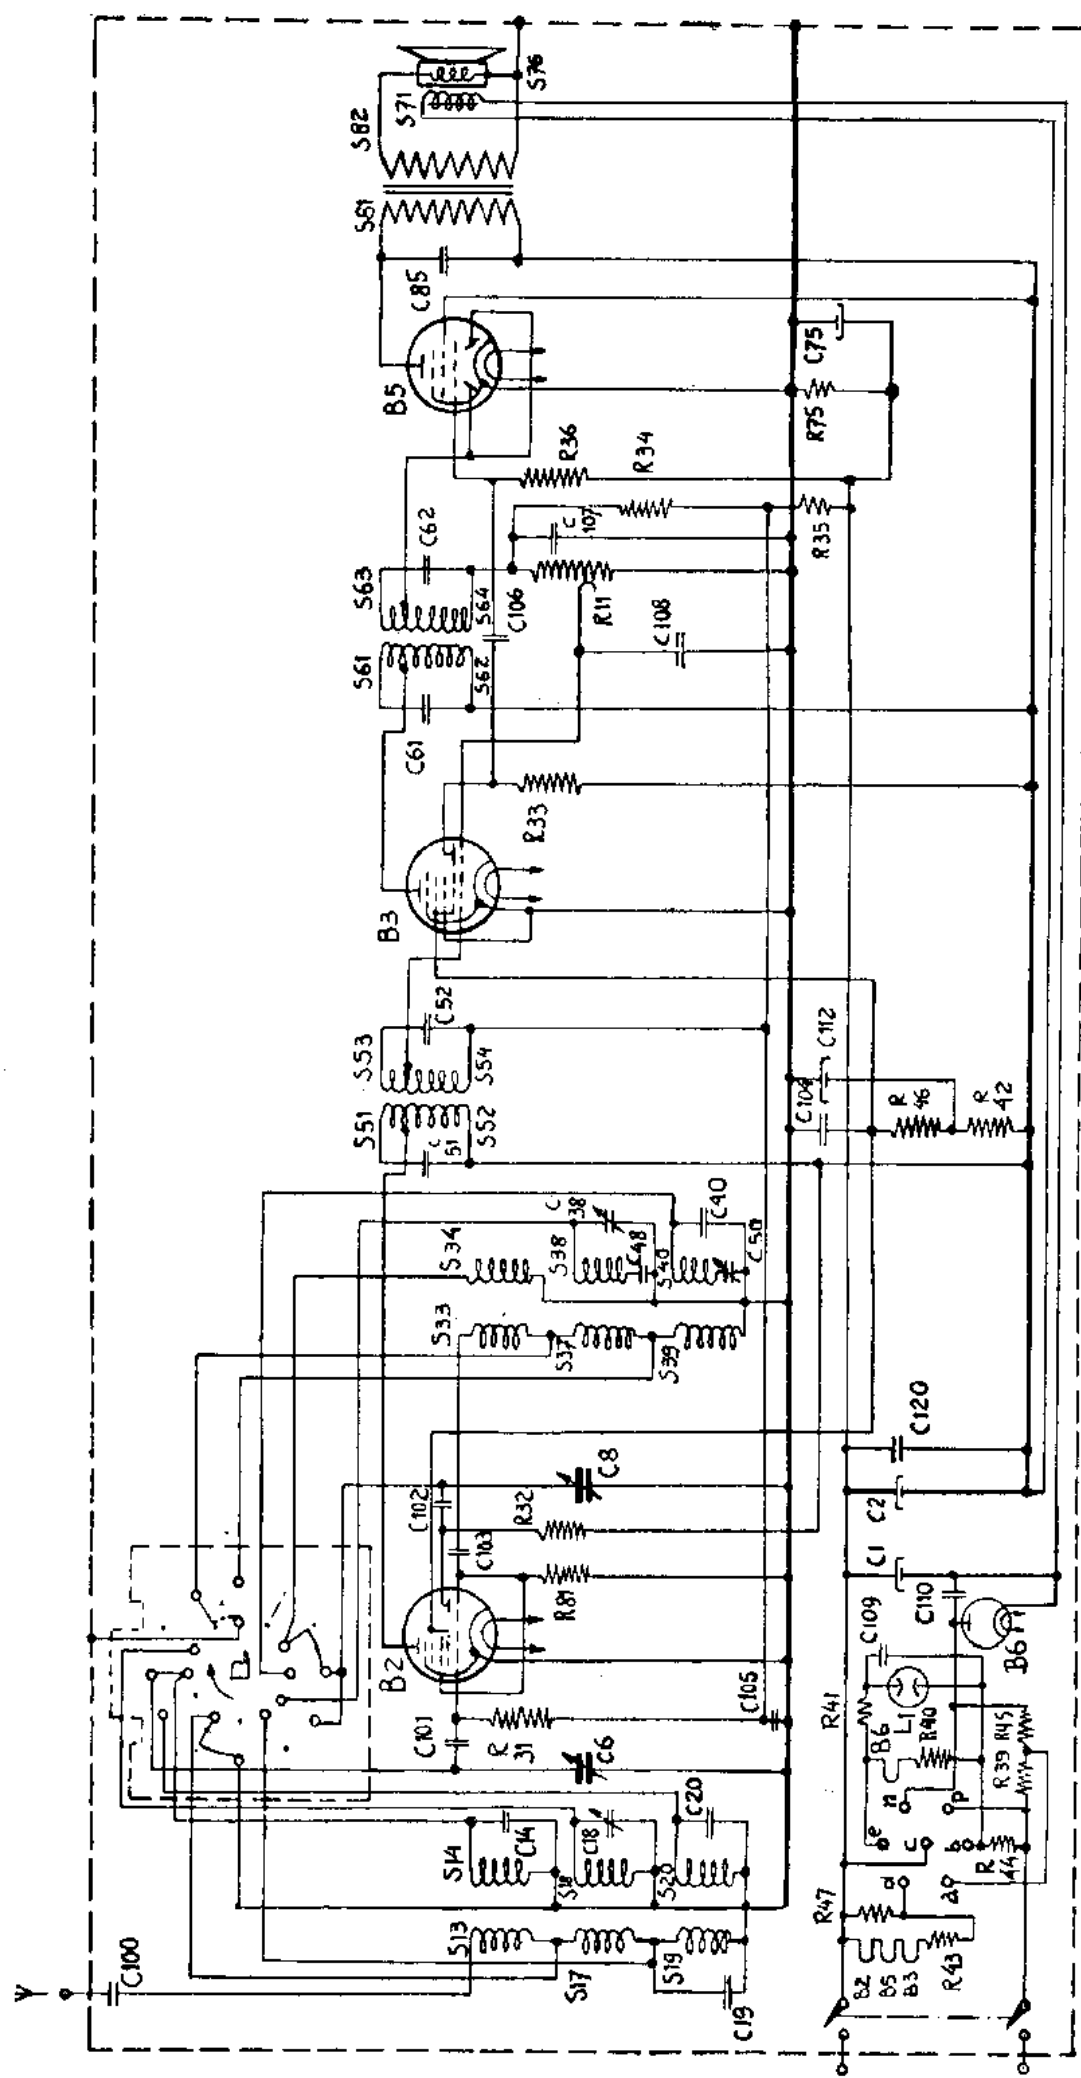

R10044

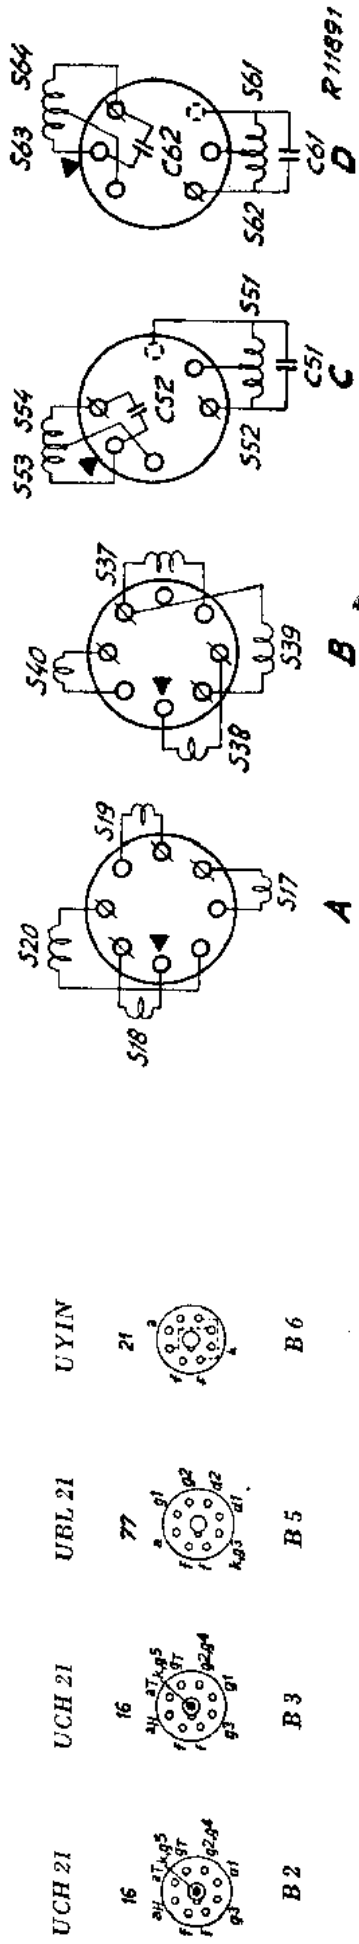

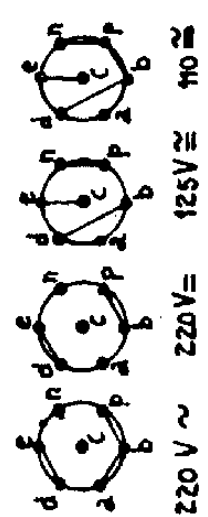


FIG. 1C.

1.928
1.833

S:	61-64	14, 33, 34, 51-54, 13,	17-20, 37-40
C:	75, 109	85, 108, 106, 110, 2a, 107, 1a, 1b, 12, 2b, 104, 14, 105, 38, 6, 8, 51, 52, 40, 120, 18, 101, 102, 103, 29, 19, 50, 48	
R:	41	36, 11	32, 31
	47	35, 34, 46, 75a, 75b	81


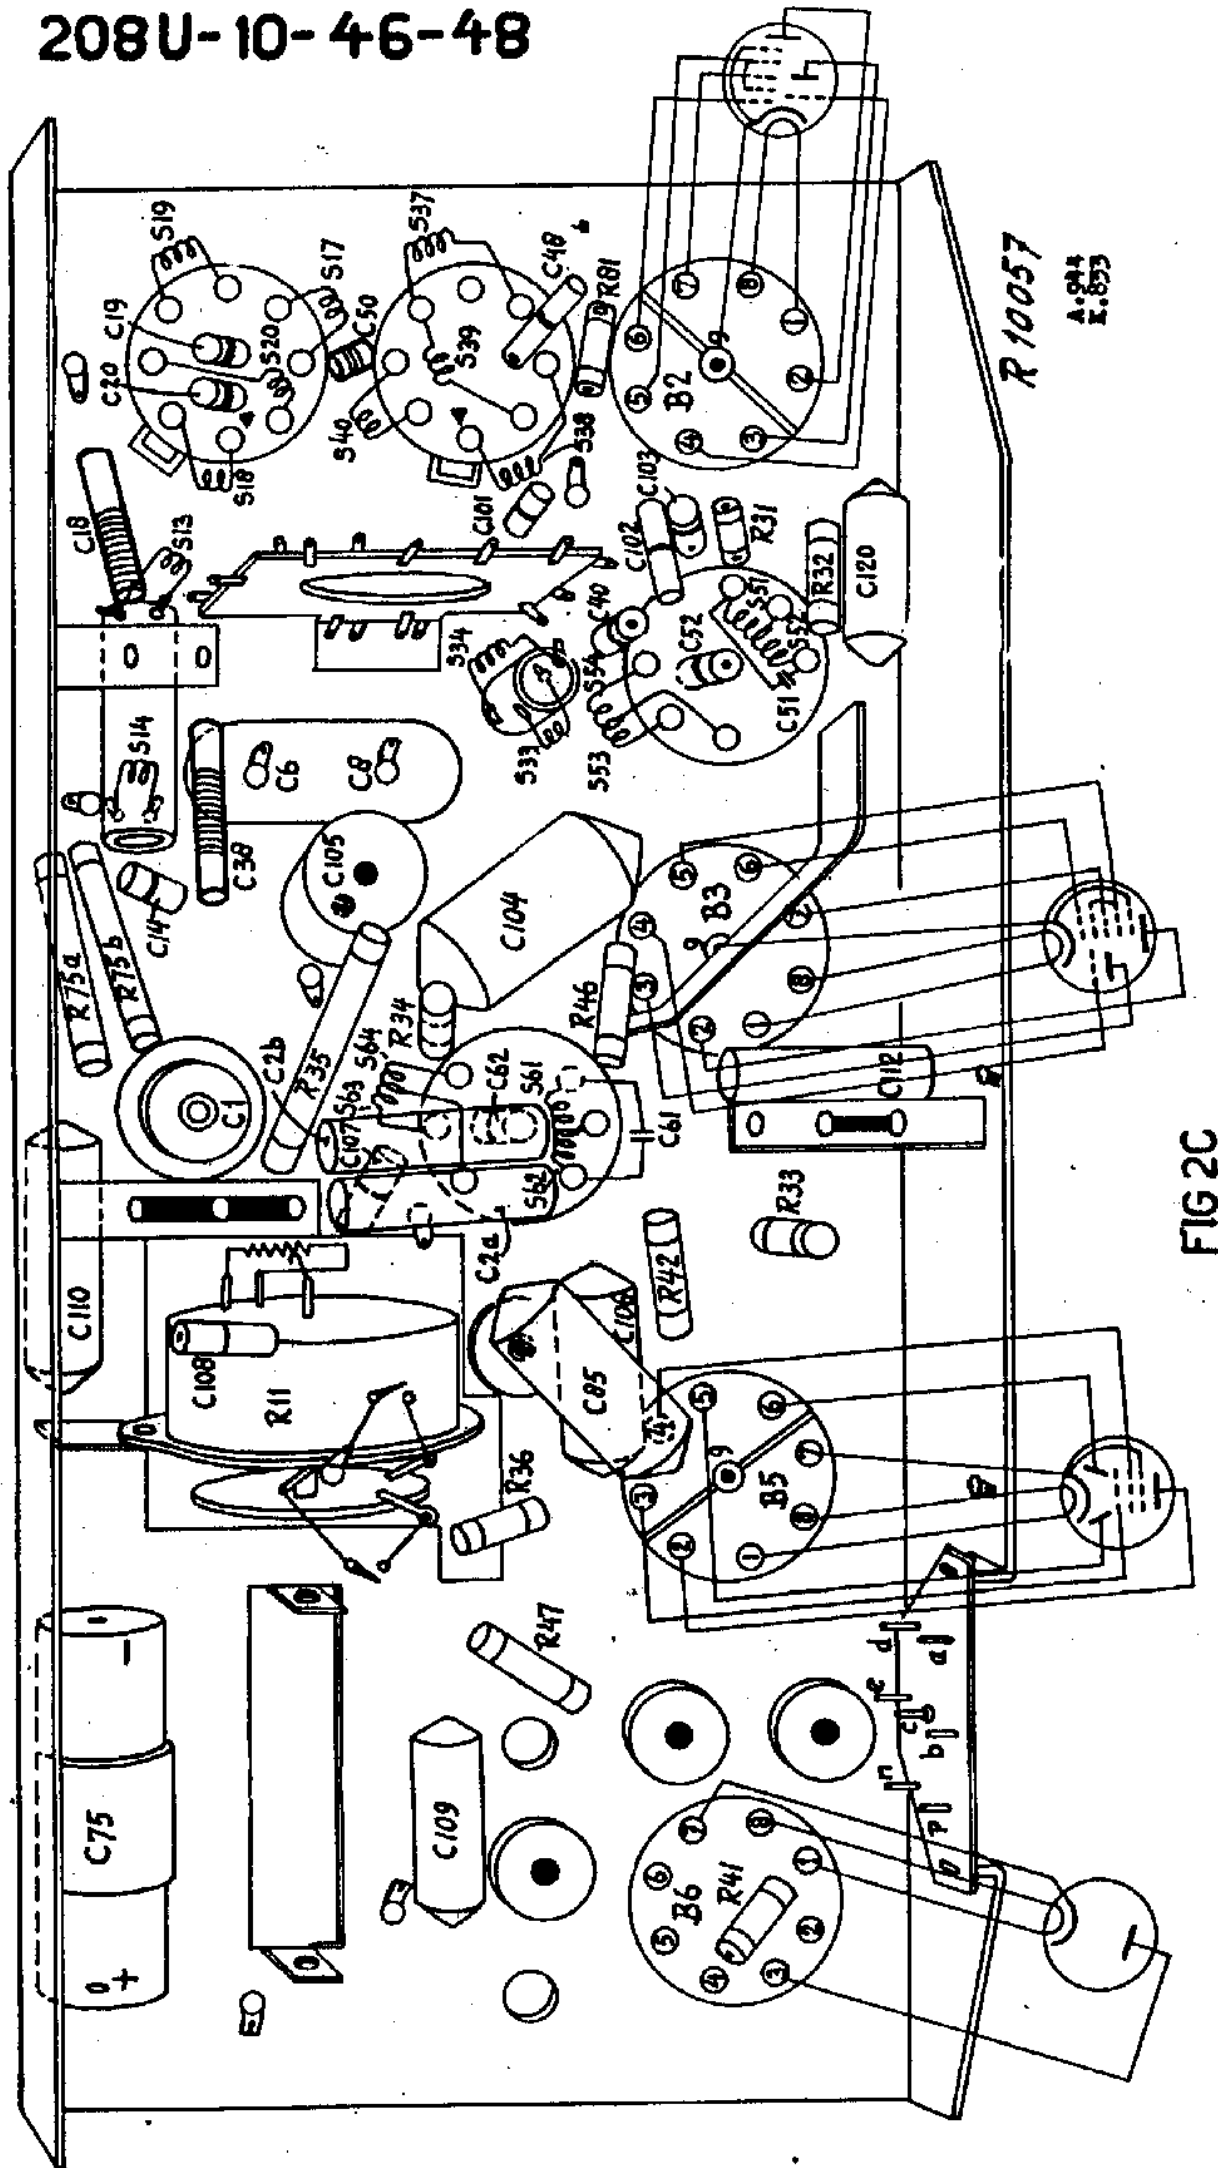


FIG 2C

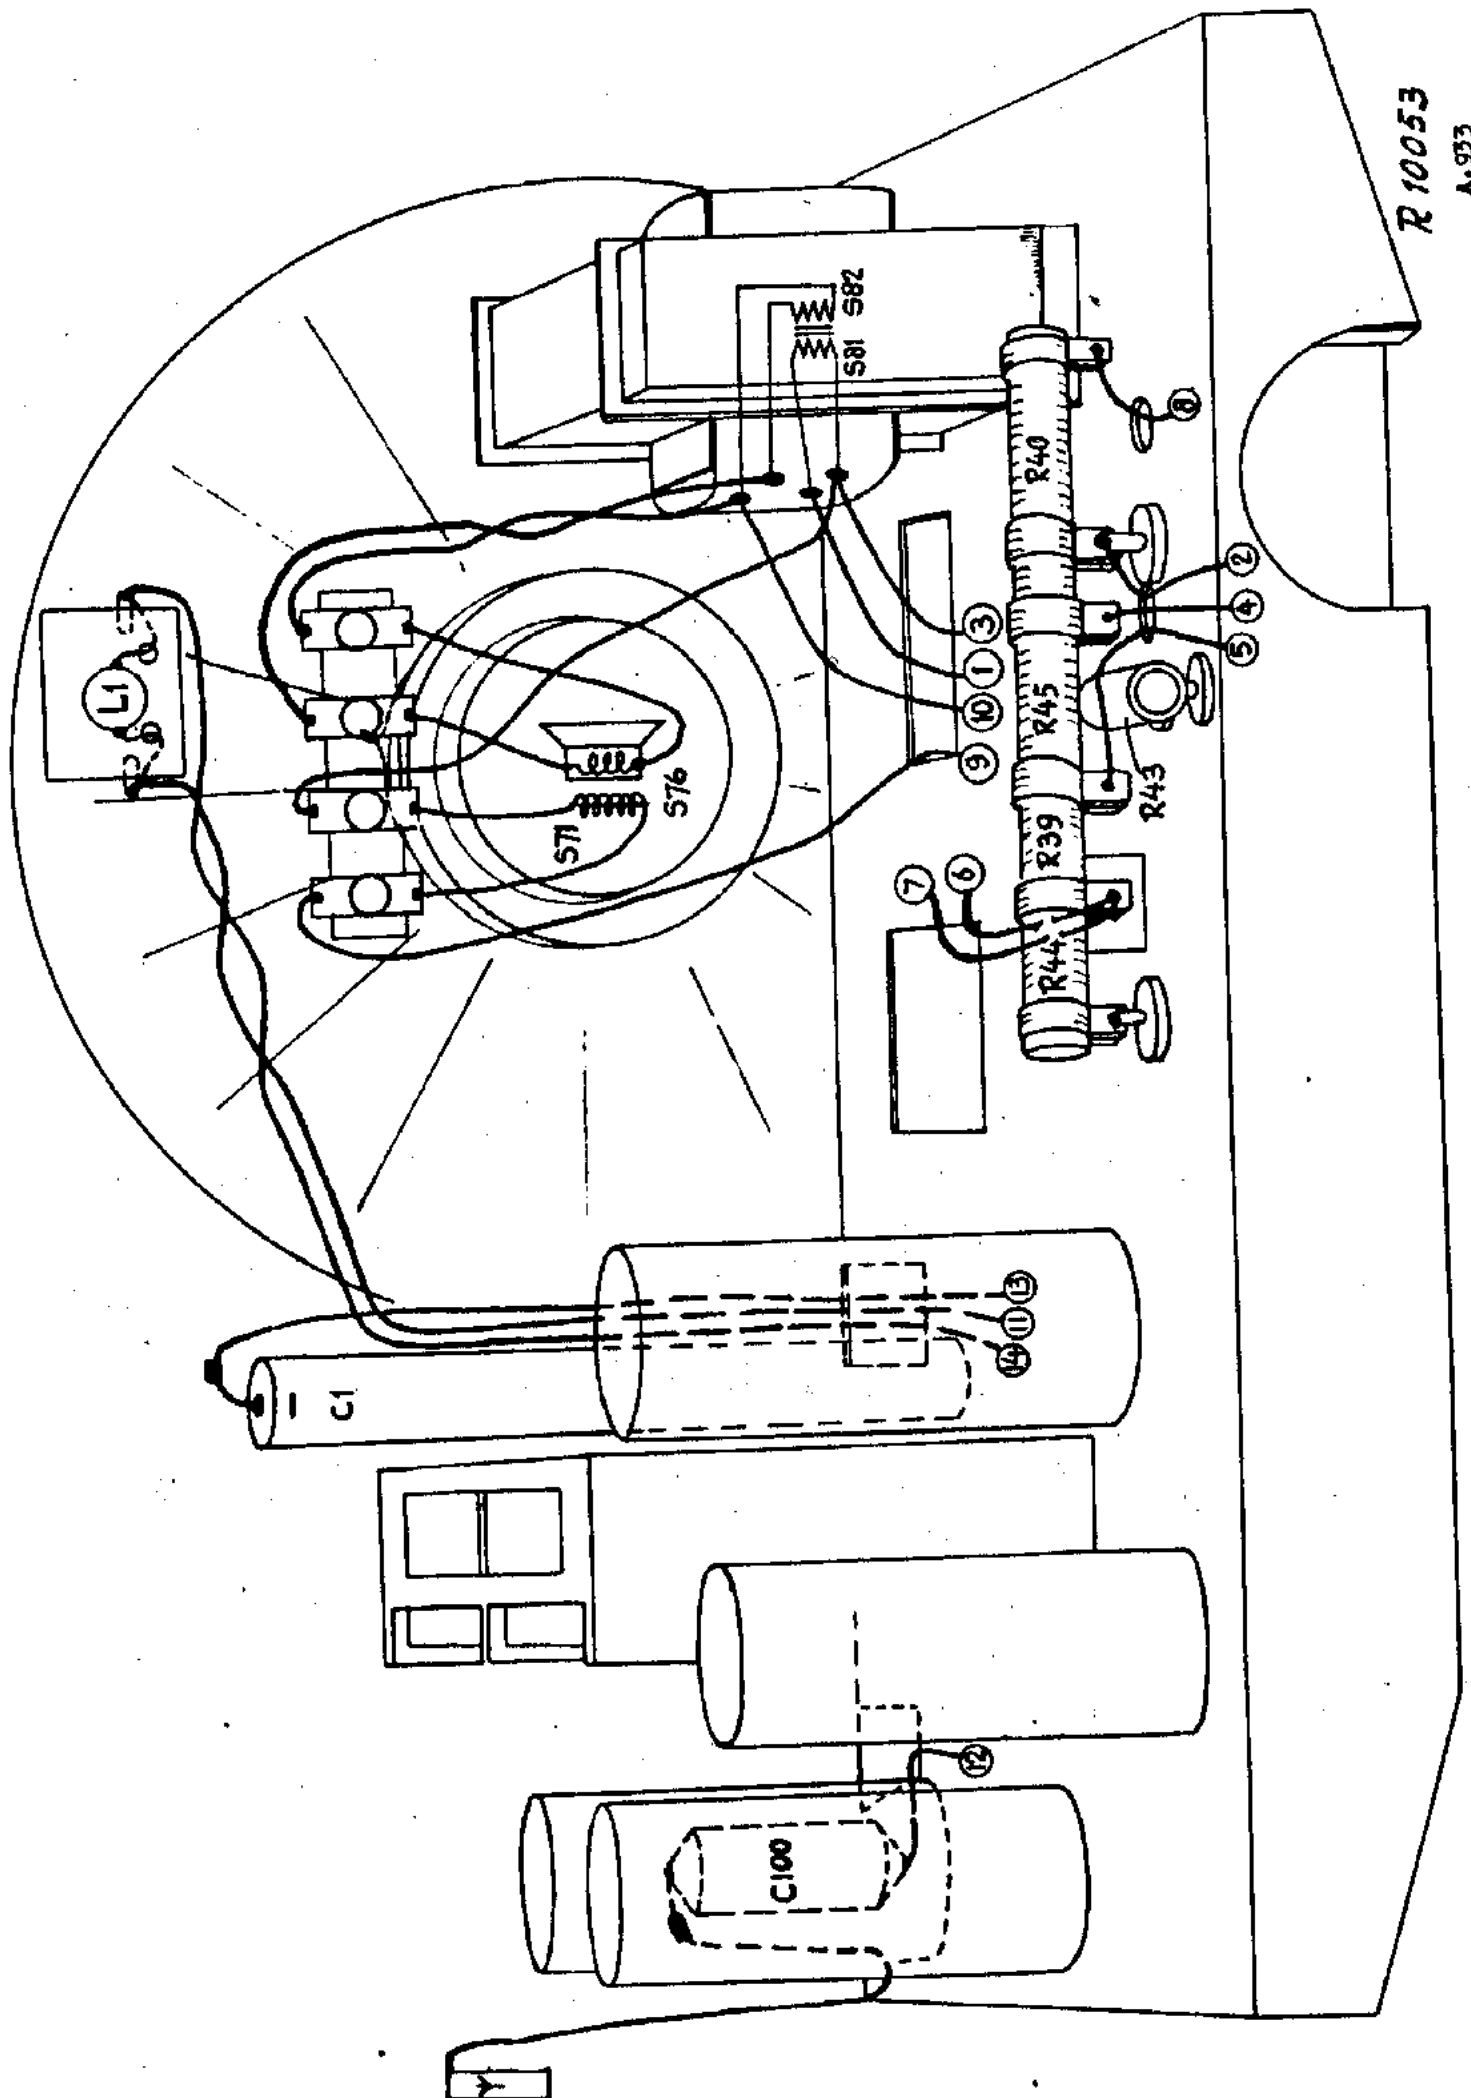

A-923
K-855

FIG. 3C.

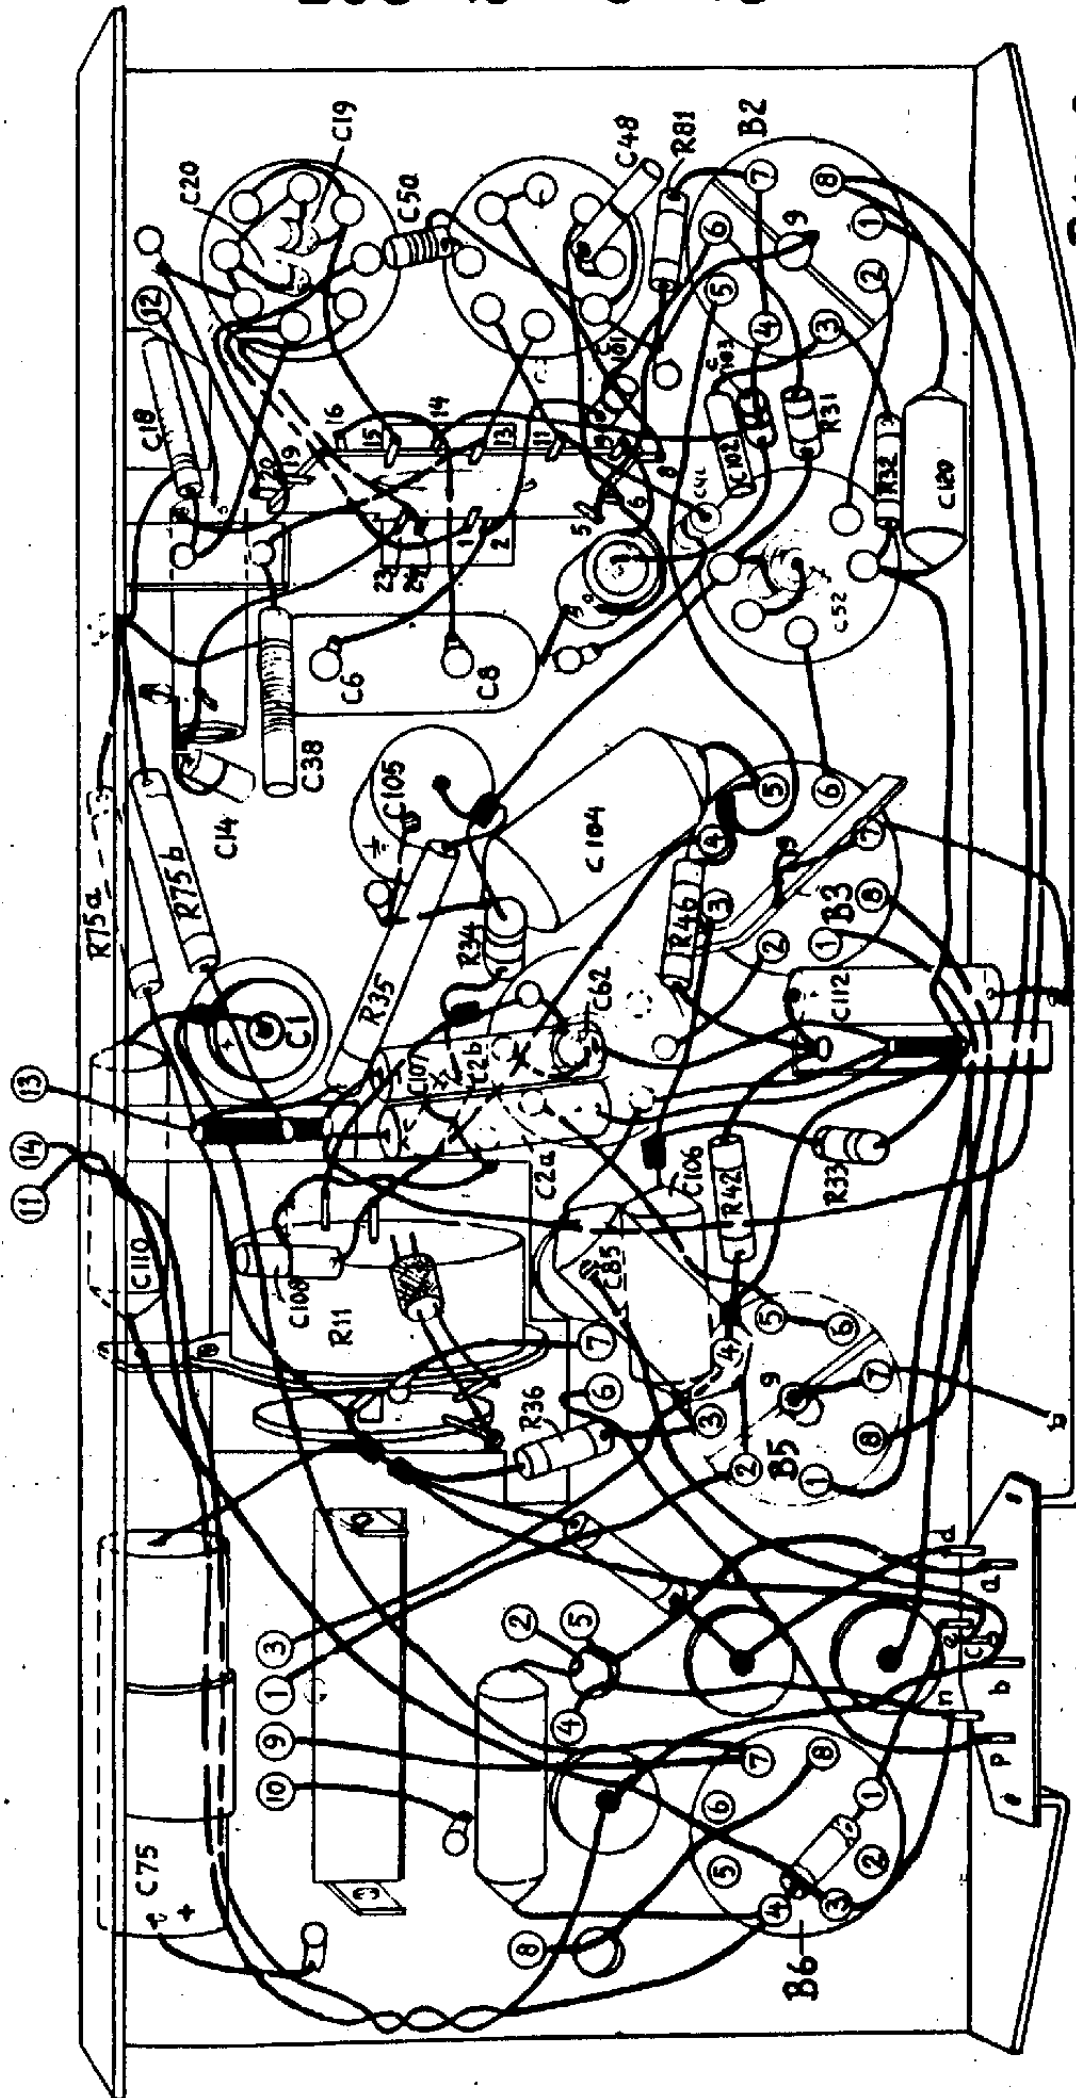



FIG. 4C.

R10048

A. 935
K. 853


10-46-48-49

220V~220V==

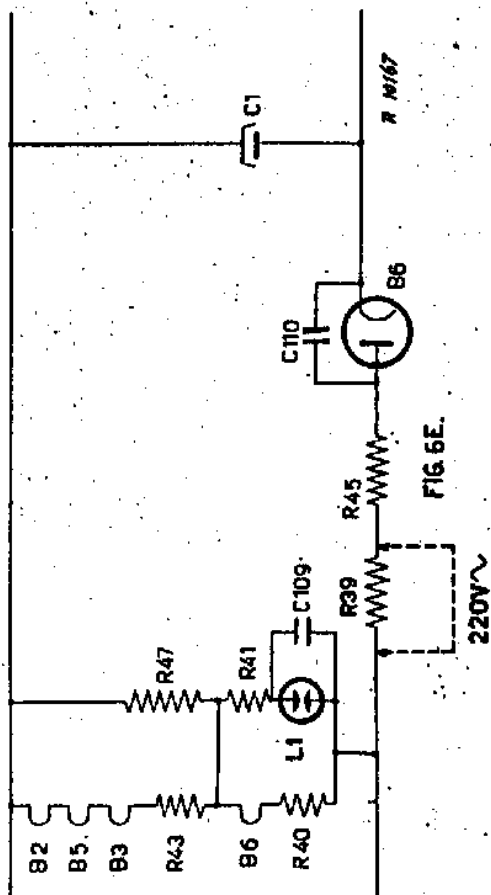


-64-84-94-04-

25V 100V

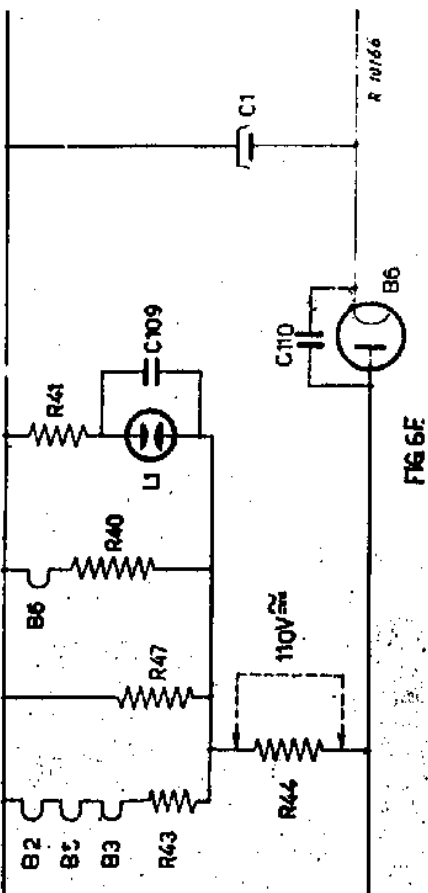

-47-


220V~220V

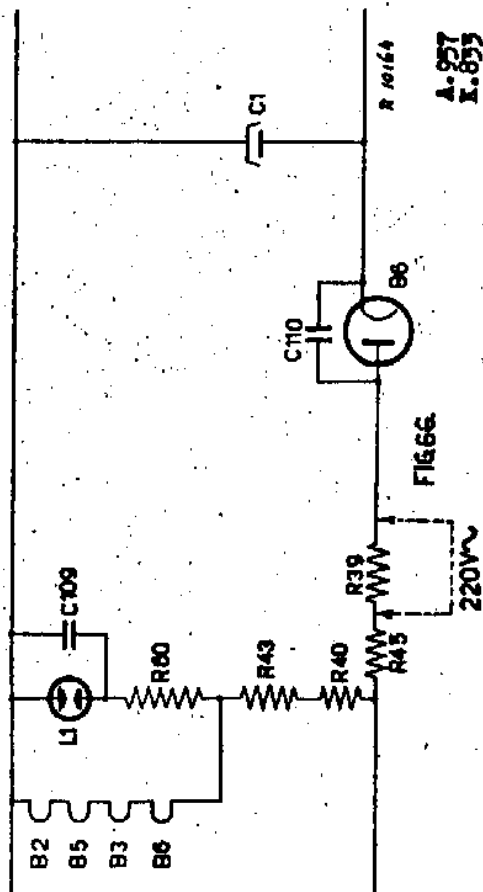

1. 957
1. 953

-47-

150V₂

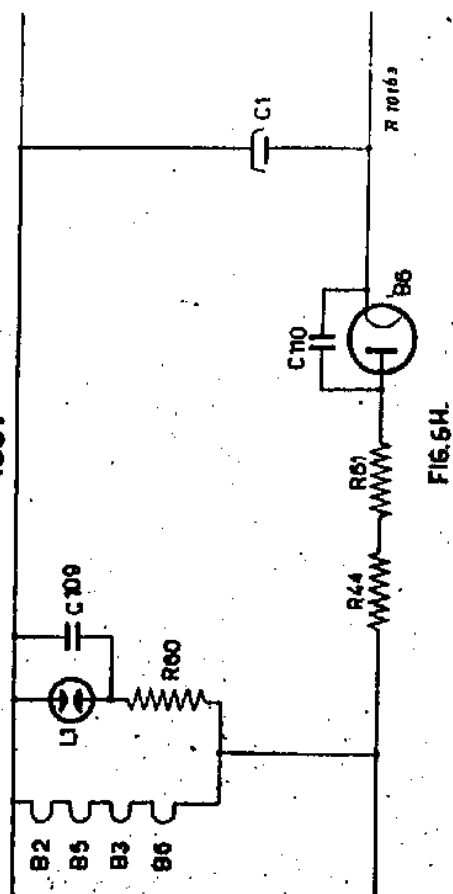

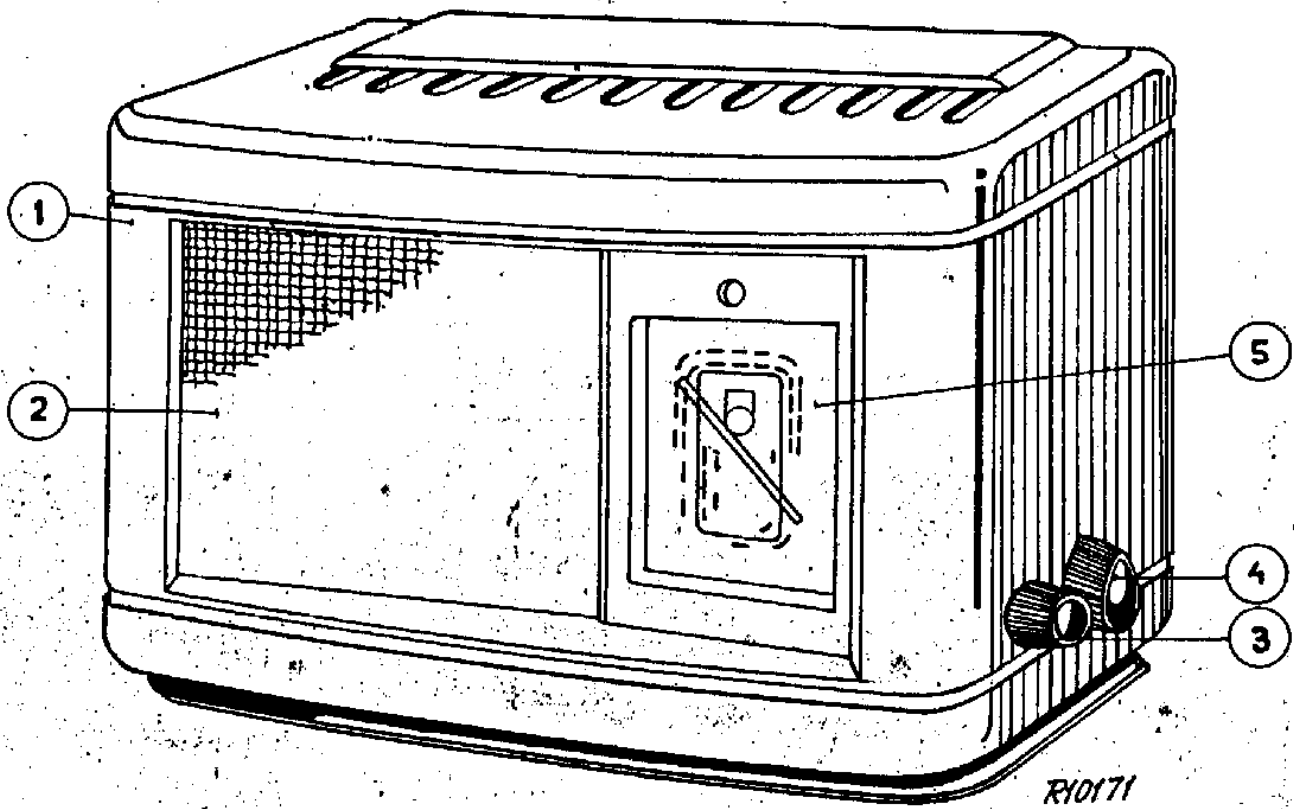


FIG. 7C.

R10171

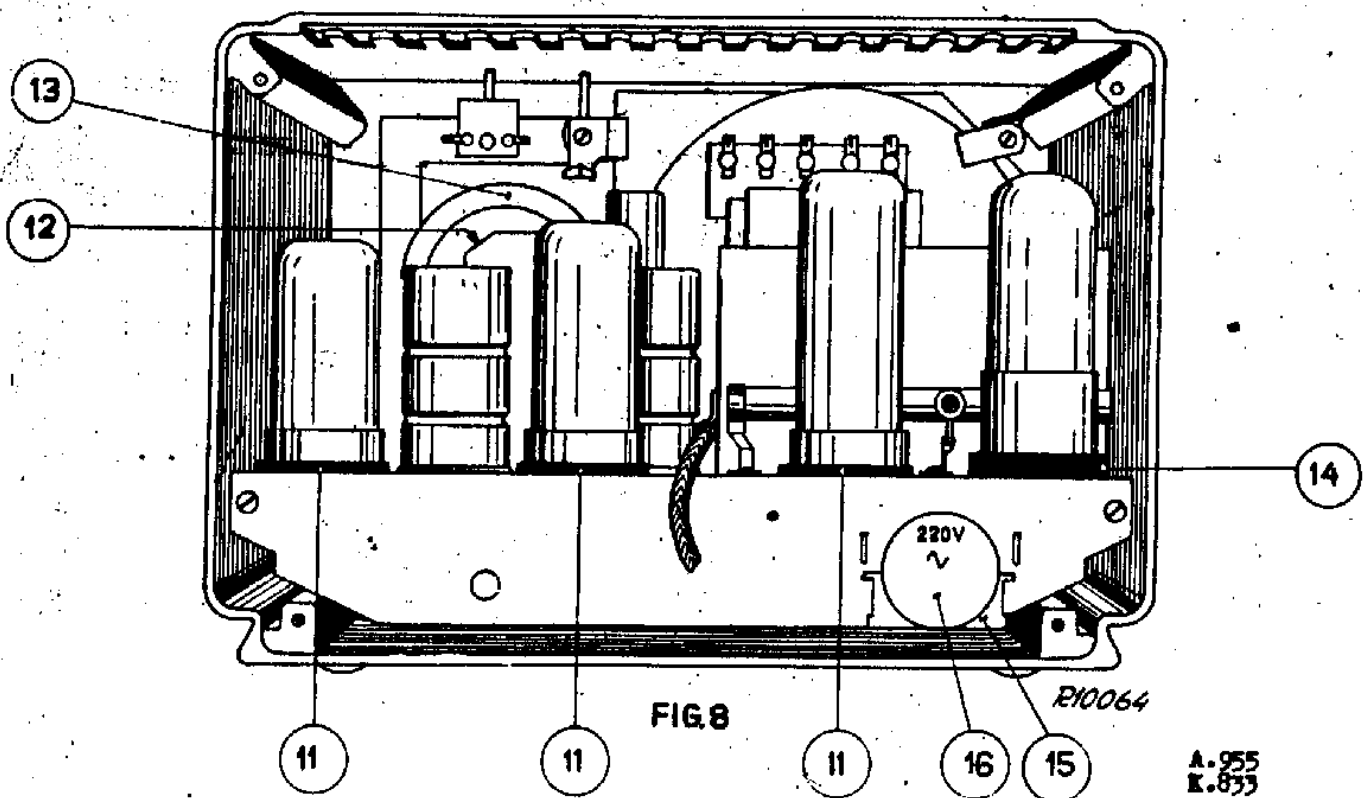


FIG. 8

R10064