


- L₁-2 BAND ANT. COIL N° 430
- L₂-2 BAND OSC. COIL N° 431
- L₃-13 IF TRANS. N° 300T
- L₄-25 IF TRANS. N° 300B
- T₁-POWER TRANS. N° 300S
- VOL. CONTROL N° 221
- 2 GANG TUNING COND. N° 432
- 6" DYNAMIC SPEAKER N° 702A
- 8" DYNAMIC SPEAKER N° 703
- BAND SWITCH N° 124
- PADDER COND. N° SP08
- E-ELECTROLYTIC FILTER COND N° 1705

MODELS B10711 and B10712

IF PEAK 465 KC.

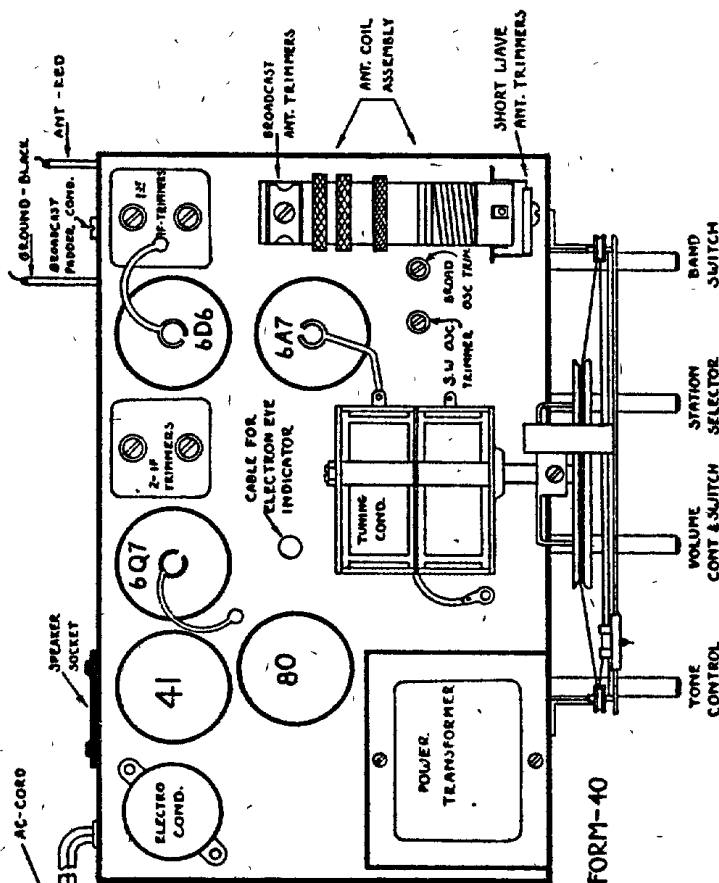

ALIGNMENT DATA

INTERMEDIATE FREQUENCY: Set oscillator to 465 KC. Feed this to the grid of the pentagrid (6A7) converter tube. Adjust trimmers on the intermediate frequency transformers for peak readings as indicated on the output meter which is to be placed across the output transformer.

BROADCAST BAND: Set the band switch for broadcast reception. Adjust oscillator to 1400 KC and connect the output of the generator to the antenna connection at the rear of the chassis through a .0002 mfd. mica condenser. Set the pointer on the dial to 1400 KC making sure that the volume control is set at its maximum position. Adjust the broadcast antenna and broadcast oscillator trimmers for maximum signal (as indicated on the output meter). Re-set the dial pointer on the receiver and on the test oscillator to 800 KC. Slowly increase or decrease the broadcast padding condenser while tuning back and forth across the signal with the station selector knob until the maximum reading is obtained on the output meter. Re-check the 1400 KC alignment as the adjustment at 800 KC may have slightly disturbed the original 1400 KC setting.

SHORT WAVE: Set band switch on short wave position. Connect the antenna of the radio receiver to the output of the test oscillator through a 400 ohm carbon resistor. Set oscillator and receiver dial at 15 megacycles. Adjust the short wave antenna and short wave oscillator trimming condensers for maximum output as indicated by readings on the output meter. No other adjustments are necessary for aligning this band.

It is advisable to check the sensitivity at 6000 KC to determine whether the circuits are properly aligned. Should the receiver lack sensitivity at this frequency check the .0035 mica condenser for short circuit.