

RESISTORS

- | | | |
|-----|--------|---|
| R1 | 130232 | 25M ohm— $\frac{1}{3}$ w. |
| R2 | 130232 | 25M ohm— $\frac{1}{3}$ w. |
| R3 | 13019 | 1 megohm— $\frac{1}{3}$ w. |
| R4 | 130239 | 250 ohm— $\frac{1}{3}$ w. |
| R5 | 130218 | 5M ohm— $\frac{1}{3}$ w. |
| R6 | 13019 | 1 megohm— $\frac{1}{3}$ w. |
| R7 | 130232 | 25M ohm— $\frac{1}{3}$ w. |
| R8 | 130318 | 6M ohm—2 watt |
| R9 | 130319 | 10M—2 watt |
| R10 | | 1 megohm in tuning indicator |
| R11 | 130200 | 700 ohm— $\frac{1}{3}$ w. |
| R12 | 13082 | 10M ohm— $\frac{1}{3}$ w. |
| R13 | 130235 | 1500 ohm— $\frac{1}{3}$ w. |
| R14 | 130235 | 1500 ohm— $\frac{1}{3}$ w. |
| R15 | 130192 | 2M ohm— $\frac{1}{3}$ w. |
| R16 | 13019 | 1 megohm— $\frac{1}{3}$ w. |
| R17 | 13020 | 100M ohm— $\frac{1}{3}$ w. |
| R18 | 1303 | 500M ohm— $\frac{1}{3}$ w. |
| R19 | 130317 | 250 ohm—2 watt |
| R20 | 1303 | 500M ohm— $\frac{1}{3}$ w. |
| R21 | 13020 | 100M ohm— $\frac{1}{3}$ w. |
| R22 | 130238 | 400M ohm— $\frac{1}{3}$ w. |
| R23 | 101234 | 500M ohm volume control
and line switch (S4) |
| R24 | 13073 | 15M ohm— $\frac{1}{3}$ w. |
| R25 | 13094 | 50M ohm— $\frac{1}{3}$ w. |
| R26 | 130218 | 5M ohm— $\frac{1}{3}$ w. |
| R27 | 13094 | 50M ohm— $\frac{1}{3}$ w. |
| R28 | 1303 | 500M ohm— $\frac{1}{3}$ w. |
| R29 | 130172 | 250M ohm— $\frac{1}{3}$ w. |
| R30 | 1303 | 500M ohm— $\frac{1}{3}$ w. |
| R31 | 130172 | 250M ohm— $\frac{1}{3}$ w. |
| R32 | 1307 | 40M ohm— $\frac{1}{3}$ w. |
| R33 | 13080 | 150M ohm— $\frac{1}{3}$ w. |
| R34 | 130309 | 350M ohm— $\frac{1}{3}$ w. |
| R35 | 130172 | 250M ohm— $\frac{1}{3}$ w. |
| R36 | 130174 | 50 ohm— $\frac{1}{3}$ w. |
| R37 | 13080 | 150M ohm— $\frac{1}{3}$ w. |






CONDENSERS

- | | | |
|-----|--------|----------------------------|
| C1 | 1292 | .0005 mica |
| C2 | 10047 | .002 x 600 v. |
| C3 | 124143 | B.C. Antenna Trimmer |
| C4 | 124143 | 9 mc. Antenna Trimmer |
| C5 | 1292 | .0005 mica |
| C6 | 10020 | .1 x 200 v. Tubular |
| C7 | 129168 | .00001 mica |
| C8 | 124138 | 9 mc. R.F. Trimmer |
| C9 | 124139 | B.C. R.F. Trimmer |
| C10 | 10074 | .1 x 400 v. |
| C11 | 10074 | .1 x 400 v. |
| C12 | 10061 | .02 x 600 v. |
| C13 | 1292 | .0005 mica |
| C14 | 10061 | .02 x 600 v. |
| C15 | 119112 | 30.0 mfd. lytic |
| C16 | 124144 | B.C. Oscillator Trimmer |
| C17 | 119112 | 30.0 mfd. lytic x 450 w.v. |
| C18 | 129167 | .0002 silver mica |
| C19 | 12938 | .00005 mica |
| C20 | 124145 | 9 mc. Oscillator Trimmer |
| C21 | 119112 | 10.0 mfd. lytic |
| C22 | 11969 | 16 mfd. x 350 w.v. |

PARTS

- | | | |
|-----|--------|------------------------|
| T1 | 111207 | Loop Antenna Assembly |
| T2 | 111195 | B.C. Antenna Coil |
| T3 | 111190 | 9 mc. Antenna Coil |
| T4 | 111189 | 6 mc. Antenna Coil |
| T5 | 111191 | 12 mc. Antenna Coil |
| T6 | 111192 | 15 mc. Antenna Coil |
| T7 | 10959 | 9 mc. R.F. Coil |
| T8 | 10958 | 6 mc. R.F. Coil |
| T9 | 10960 | 12 mc. R.F. Coil |
| T10 | 10961 | 15 mc. R.F. Coil |
| T11 | 10962 | B.C. R.F. Coil |
| T12 | 110161 | B.C. Oscillator Coil |
| T13 | 110157 | 9 mc. Oscillator Coil |
| T14 | 110156 | 6 mc. Oscillator Coil |
| T15 | 110158 | 12 mc. Oscillator Coil |
| T16 | 110159 | 15 mc. Oscillator Coil |

C3 and C4 in same unit
C15, C17 and C21 in same unit
C29 and C30 in same unit

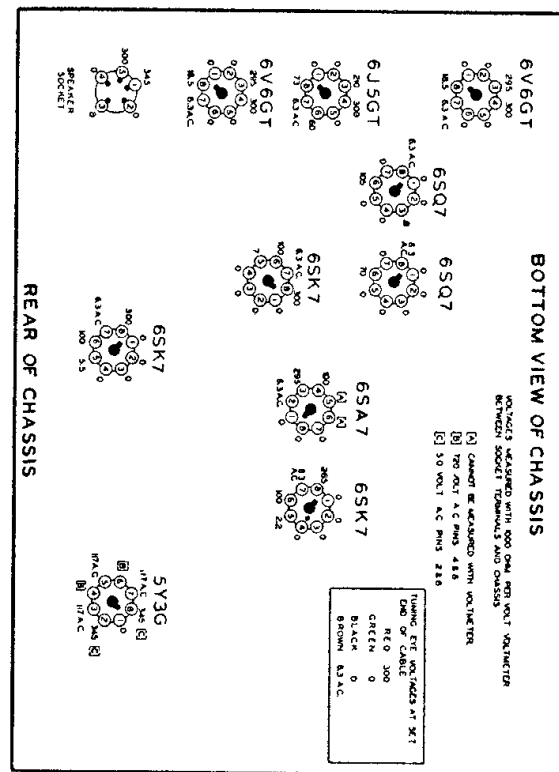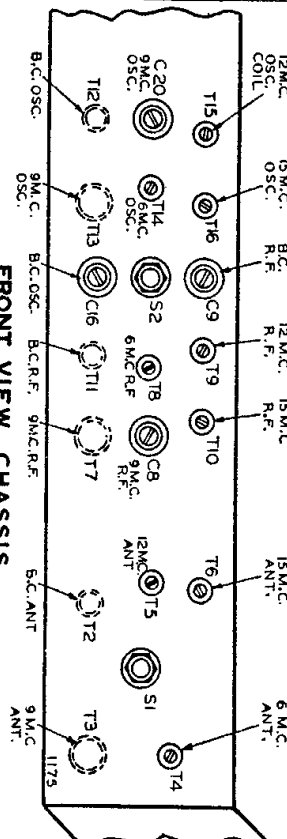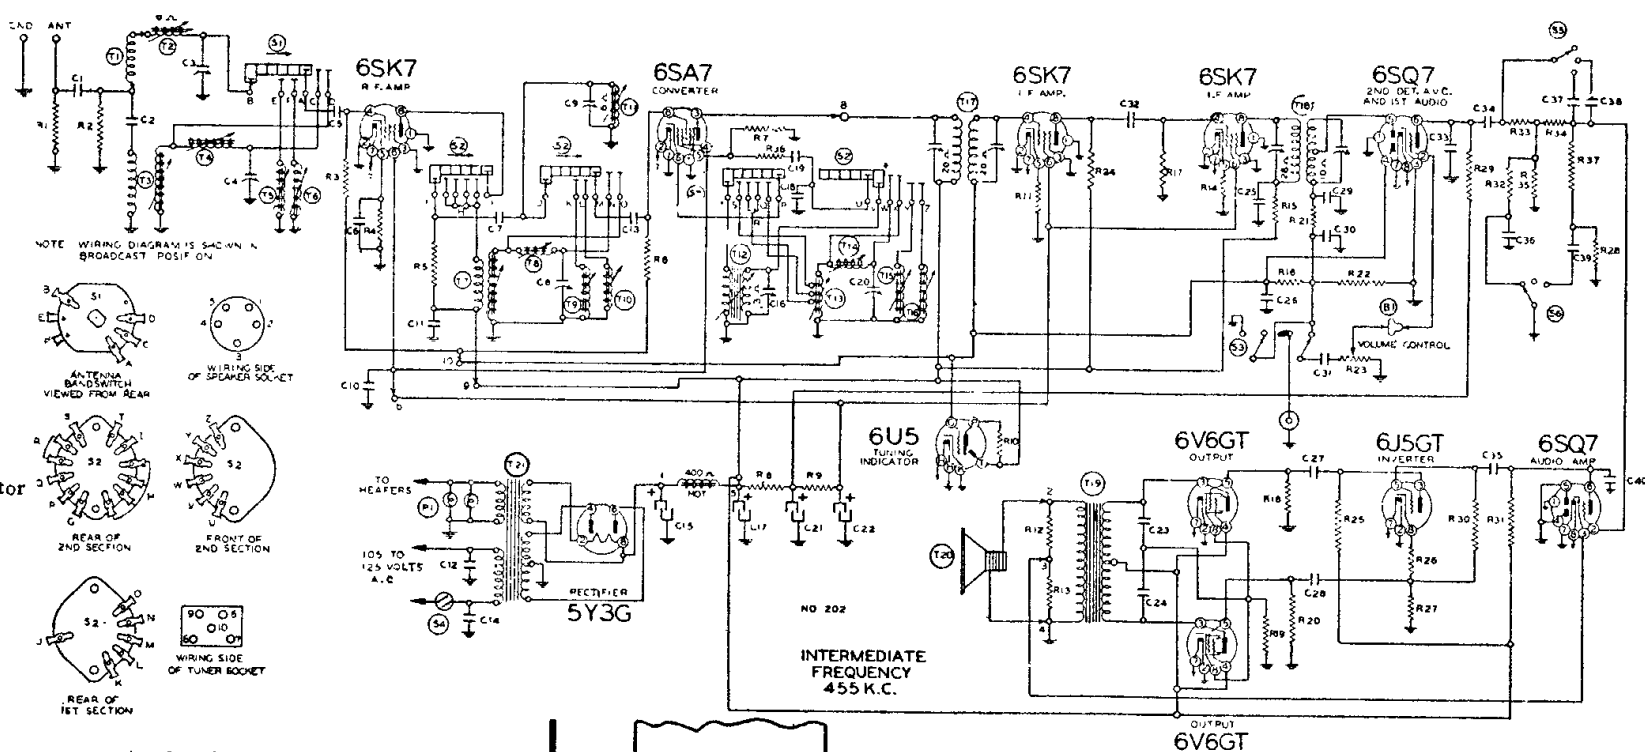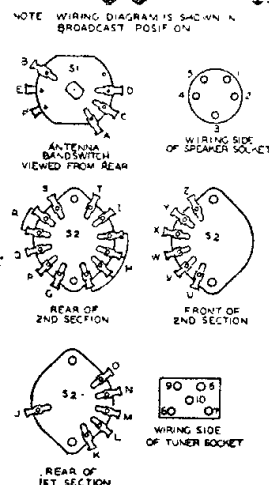

Belmont Radio
Model 1100