



BELMONT RADIO CORP.



MODEL 7H31

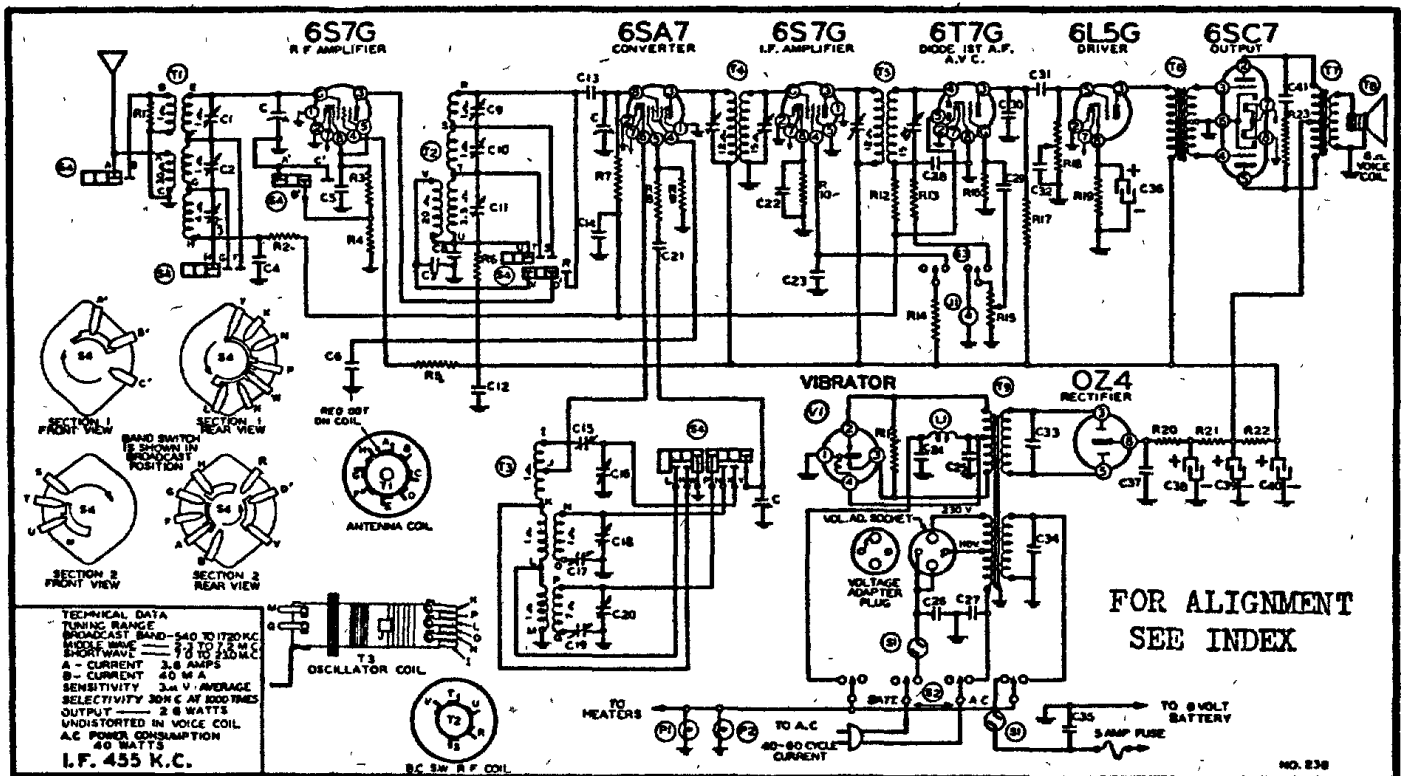

| Part No. | Schematic Diagram Reference | Description | No. Used In Set | Selling Price Each |
|-------------------|-----------------------------|---|-----------------|--------------------|
| CONDENSERS | | | | |
| 1001 | C6, C37 | .1 x 400 Volt Tubular Condenser | 2 | .25 |
| 10011 | C26, C27, C31 | C32, C34 .01 x 400 Volt Tubular Condenser | 5 | .25 |
| 10013 | C8, C23 | .05 x 400 Volt Tubular Condenser | 2 | .25 |
| 10020 | C5 | .1 x 200 Volt Tubular Condenser | 1 | .25 |
| 10022 | C4, C22, C35 | .05 x 200 Volt Tubular Condenser | 3 | .25 |
| 10025 | C29 | .002 x 600 Volt Tubular Condenser | 1 | .25 |
| 10026 | C13, C14 | .02 x 400 Volt Tubular Condenser | 2 | .25 |
| 10031 | C24, C25 | .5 x 120 Volt Tubular Condenser | 2 | .60 |
| 10071 | C41 | .004 x 600 Volt Tubular Condenser | 1 | .25 |
| 100100 | C33 | .008 x 1600 Volt Tubular Condenser | 1 | .25 |
| 100117 | C12 | .25 x 400 Volt Tubular Condenser—With Bracket | 1 | .35 |
| 119127 | C36, C38, C39 | C40 Electrolytic Filter Condenser. 40 Mfd. x 25 V.—40 Mfd. x 300 V.—20 Mfd. x 300 V.—20 Mfd. x 300 V. | 1 | 1.50 |
| 124169 | C9, C10, C11 | S.W.—M.W.—B.C.—Triple Unit Antenna Trimmer Condenser Strip | 1 | .60 |
| 124170 | C1, C2, C3 | S.W.—M.W.—B.C.—Triple Unit Antenna Trimmer Condenser Strip | 1 | .60 |
| 124172 | C16, C18, C20 | S.W.—M.W.—B.C.—Triple Unit Antenna Trimmer Condenser Strip | 1 | .55 |
| 129178 | C19 | B.C. Osc. Series Pad Condenser | 1 | .35 |
| 129179 | C17 | M.W. Osc. Series Pad Condenser | 1 | .45 |
| 129180 | C15 | S.W. Osc. Series Pad Condenser | 1 | .55 |
| 1295 | C21, C28 | .0001 Mica Type Condenser—20% | 2 | .25 |
| 12912 | C30 | .00025 Mica Type Condenser—20% | 1 | .25 |
| 12940 | C7 | .0001 Mica Type Condenser—10% | 1 | .25 |
| RESISTORS | | | | |
| | | 3 Megohm— $\frac{1}{2}$ Watt Resistor—20% | 1 | .20 |
| | | 200M Ohm— $\frac{1}{2}$ Watt Resistor—20% | 1 | .20 |
| | | 50M Ohm— $\frac{1}{2}$ Watt Resistor—20% | 1 | .20 |
| | | 1 Megohm— $\frac{1}{2}$ Watt Resistor—20% | 1 | .20 |
| | | 100M Ohm— $\frac{1}{2}$ Watt Resistor—20% | 1 | .20 |
| | | 50 Ohm— $\frac{1}{2}$ Watt Resistor—20% | 1 | .20 |
| | | 1500 Ohm— $\frac{1}{2}$ Watt Resistor—20% | 1 | .20 |
| | | 35M Ohm— $\frac{1}{2}$ Watt Resistor—20% | 1 | .20 |
| | | 3500 Ohm— $\frac{1}{2}$ Watt Resistor—20% | 1 | .20 |
| | | 75M Ohm— $\frac{1}{2}$ Watt Resistor—10% | 1 | .20 |
| | | 200 Ohm— $\frac{1}{2}$ Watt Resistor—20% | 2 | .20 |
| | | 300 Ohm— $\frac{1}{2}$ Watt Resistor—20% | 1 | .20 |
| | | 1500 Ohm—1 Watt Resistor—10% | 1 | .20 |
| | | 1500 Ohm— $\frac{1}{2}$ Watt Resistor—10% | 1 | .20 |
| | | 5 Megohm— $\frac{1}{2}$ Watt Resistor—25% | 1 | .20 |
| | | 12M Ohm—2 Watt Resistor—10% | 1 | .20 |
| | | 1M Ohm— $\frac{1}{2}$ Watt Resistor—10% | 1 | .20 |
| | | 2M Ohm— $\frac{1}{2}$ Watt Resistor—20% | 1 | .20 |
| | | 15M Ohm— $\frac{1}{2}$ Watt Resistor—20% | 1 | .20 |
| | | 10 Ohm— $\frac{1}{2}$ Watt Resistor—20% | 1 | .20 |

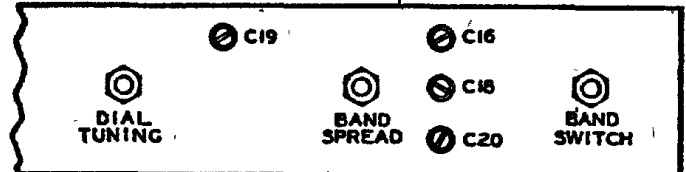

TRIMMER VIEW—Looking at front of chassis.

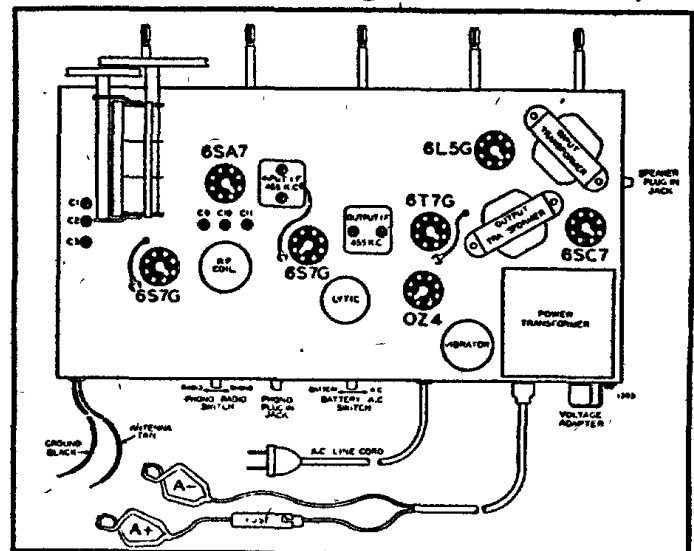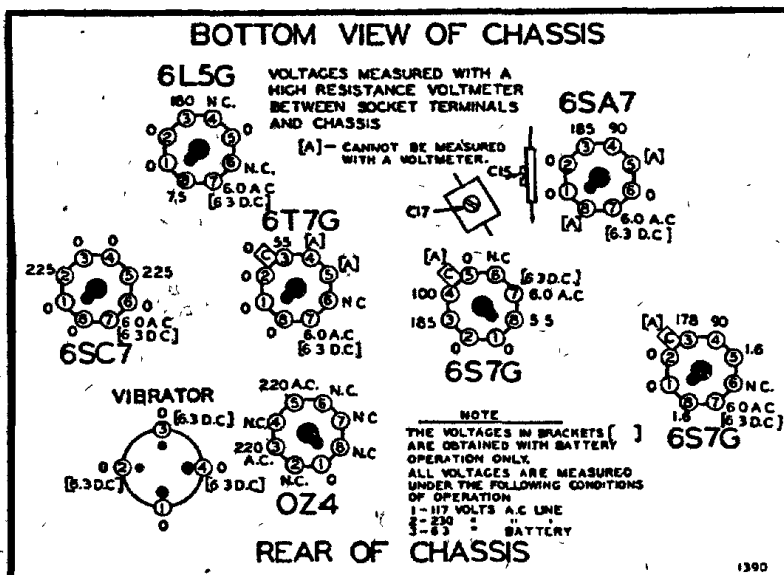

CHASSIS VIEW showing tube location.
 .NOTE: Antenna and ground leads at back of chassis.