



GAMBLE-SKOGMO, INC.

MODEL 642

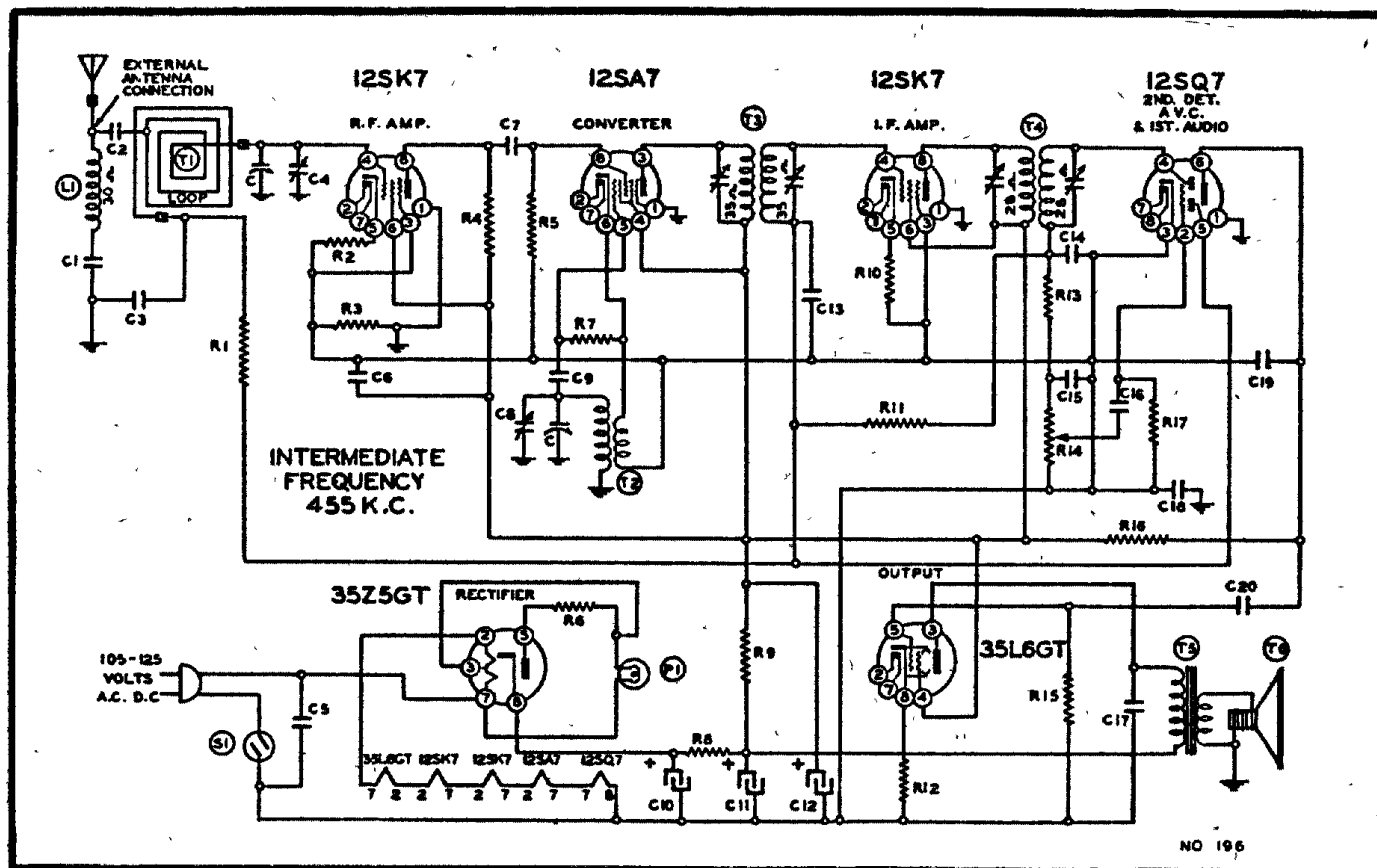

NOVEMBER, 1940

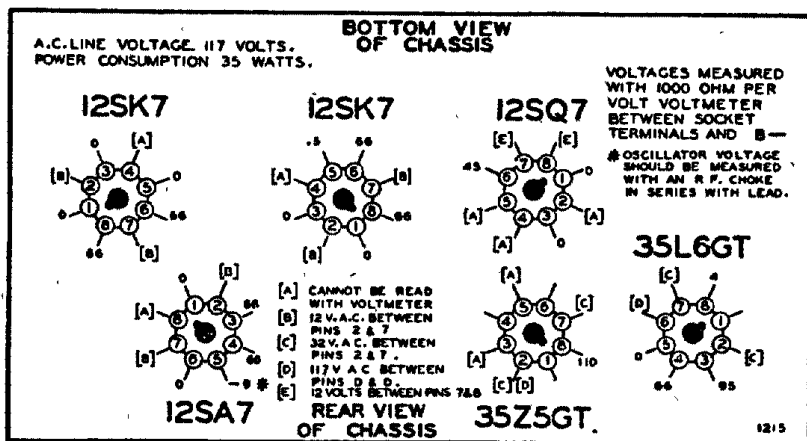

R17 130257 5 megohm— $\frac{1}{2}$ w.

CONDENSERS

C	Part No.	Description
C1	102116	2 gang variable condenser
C2	10011	.01 x 400 v.
C3	129132	.000125 mica
C4	10026	.02 x 400 v.
C5	1001	B.C. Antenna Trimmer
C6	1006	.1 x 400 v.
C7	1006	.25 x 200 v.
C8	1295	.0001 mica
C9	1295	.0001 mica
C10	11994	40 mfd.—150 w.v. lytic
C11	11994	20 mfd.—150 w.v. lytic
C12	11994	20 mfd.—150 w.v. lytic
C13	1009	.05 x 200 v.
C14	1295	.0001 mica

Code Part No. Description

RESISTORS

R	Part No.	Description
R1	130100	150M ohm— $\frac{1}{2}$ w.
R2	130168	100 ohm— $\frac{1}{2}$ w.
R3	130100	150M ohm— $\frac{1}{2}$ w.
R4	130218	5M ohm— $\frac{1}{2}$ w.
R5	13020	100M ohm— $\frac{1}{2}$ w.
R6	130215	25 ohm— $\frac{1}{2}$ w.
R7	13094	50M ohm— $\frac{1}{2}$ w.
R8	130296	200 ohm—1 w.
R9	130287	1200 ohm—1 w.
R10	130248	40 ohm— $\frac{1}{2}$ w.
R11	1304	3 megohm— $\frac{1}{2}$ w.
R12	130166	150 ohm— $\frac{1}{2}$ w.
R13	13012	50M ohm— $\frac{1}{2}$ w.
R14	101193	1 megohm volume control
R15	1303	500M ohm— $\frac{1}{2}$ w.
R16	1309	200M ohm— $\frac{1}{2}$ w.
C15	12939	.00005 mica
C16	10025	.002 x 600 v.
C17	10026	.02 x 400 v.
C18	100110	.2 x 400 v.
C19	1295	.0001 mica
C20	100106	.004 x 600 v.

C10, C11 and C12 are in same unit

PARTS

T	Part No.	Description
T1	111145	Loop Antenna Assembly
T2	110128	Oscillator Coil
T3	108140G	Input I.F. Coil—465 kc.
T4	108145C	Output I.F. Coil—465 kc.
T5	10595B	Output Transformer
T6	114174	5" P.M. Speaker
L1	1237	Loading Coil
S1		On-off switch on volume control
P1	107249	Pilot light T47

FOR TUNER DATA SEE INDEX

