


GAMBLE-SKOGMO, INC.

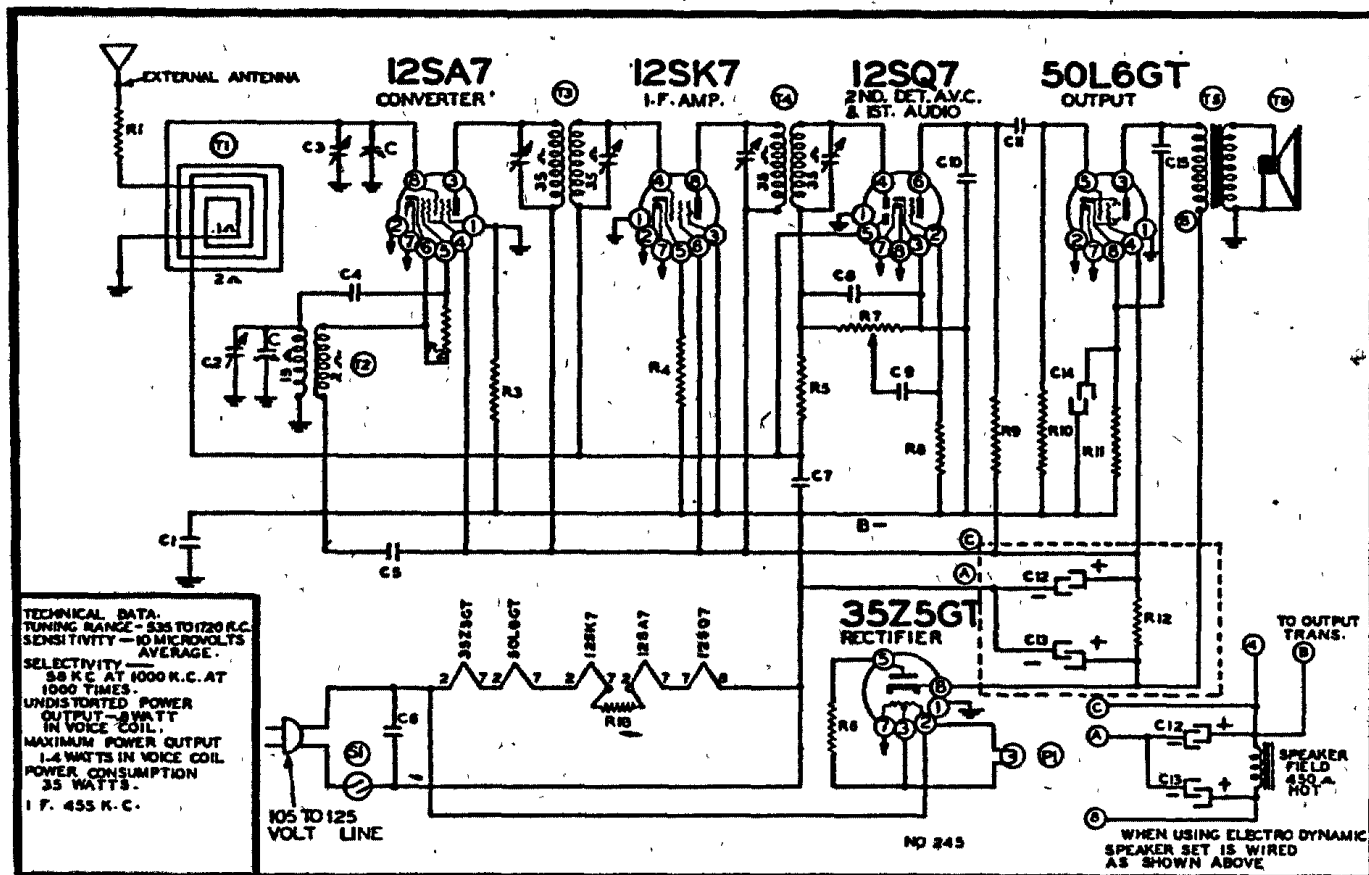

Part No.	Schematic Diagram Reference	Description	No. Used In Set	Selling Price Each
----------	-----------------------------	-------------	-----------------	--------------------

CONDENSERS

102151	C, C2	Two Gang Variable Condenser with Osc. Trimmer Condenser	1	2.50
1001	C6	.1 x 400 Volt Tubular Condenser	1	.25
1009	C5, C7	.05 x 200 Volt Tubular Condenser	2	.25
10025	C9	.002 x 600 Volt Tubular Condenser	1	.25
10091	C1	.15 x 400 Volt Tubular Condenser	1	.25
100106	C11	.004 x 600 Volt Tubular Condenser	1	.25
10026	C15	.02 x 400 Volt Tubular Condenser	1	.25
119134	C12, C13, C14	Electrolytic Filter Condenser. 25 to 60 Cycles. 20 Mfd. x 150 V.; 40 Mfd. x 150 V.; 40 Mfd. x 25 V.	1	1.25
124180	C3	Antenna Trimmer	1	.55
12921	C4	.0002 Mica Type Condenser—20%	1	.25
1295	C8	.0001 Mica Type Condenser—20%	1	.25
12912	C10	.00025 Mica Type Condenser—20%	1	.25

RESISTORS

101265	R7, S1	Volume Control and Switch (1 Megohm)	1	1.00
13094	R2	50M Ohm— $\frac{1}{2}$ Watt Resistor—10%	1	.20
130215	R6	25 Ohm— $\frac{1}{2}$ Watt Resistor—10%	1	.20
1309	R3	200M Ohm— $\frac{1}{2}$ Watt Resistor—20%	1	.20
13097	R4	200 Ohm— $\frac{1}{2}$ Watt Resistor—10%	1	.20
1304	R5	3 Megohm— $\frac{1}{2}$ Watt Resistor—20%	1	.20
130257	R8	5 Megohm— $\frac{1}{2}$ Watt Resistor—25%	1	.20
1303	R9	500M Ohm— $\frac{1}{2}$ Watt Resistor—20%	1	.20
13037	R10	750M Ohm— $\frac{1}{2}$ Watt Resistor—20%	1	.20
130166	R11	150 Ohm— $\frac{1}{2}$ Watt Resistor—10%	1	.20
130287	R12	1200 Ohm—1 Watt Resistor—10%	1	.20
130293	R13	30 Ohm—1 Watt Resistor—10%	1	.20
13026	R1	1M Ohm— $\frac{1}{2}$ Watt Resistor—10%	1	.20

COILS

108140N	T3	Input I.F. Coil Complete in Can	1	1.00
108141G	T4	Output I.F. Coil Complete in Can	1	1.00
110487	T2	Oscillator Coil	1	.50
111258	T1	Loop Antenna (Specify Color)	1	1.25
128730		Cardboard Back Only (Specify Color)	1	.10

A	CANNOT BE MEASURED WITH VOLTMETER
B	12 VOLTS A.C. ACROSS PINS 3-7
C	12 VOLTS A.C. ACROSS PINS 7-9
D	40 VOLTS A.C. ACROSS PINS 2-7
E	25 VOLTS A.C. ACROSS PINS 2-7
F	117 VOLTS A.C. ACROSS PINS 2-4

SPEAKER

114251	T6	Five Inch P.M. Dynamic Speaker Less Output Transformer	1	3.50
114258	T6	Five Inch Electro Dynamic Speaker Less Output Transformer	1	3.50
105108D	T5	Output Transformer	1	1.00

DIAL AND TUNING PARTS

107249	P1	6-8 Volt Pilot Lite Bulb, Type T-47	1	.10
107389B		Socket Assembly for Dial Light	1	.10
1121000		Dial Scale	1	1.75
112998		Diffuser for Dial	1	.10
131211		Snap-In Rivets to Fasten Dial Scale	2	.01
112999		Pointer	1	.10
120145		Coiled Tension Spring for Dial String	1	.05
1209		String for Dial	Yard	.15
117919		Tuning Shaft	1	.10
128686-37		Knob—Walnut—"Volume"	1	.20
128687-37		Knob—Walnut—"Tuning"	1	.20
128686-8		Knob—Ivory—"Volume"	1	.20
128687-8		Knob—Ivory—"Tuning"	1	.20

BOTTOM VIEW OF CHASSIS

ALL VOLTAGES MEASURED BETWEEN SOCKET PIN & B-, WITH A 1000 OHMS PER VOLT VOLTMETER.

