

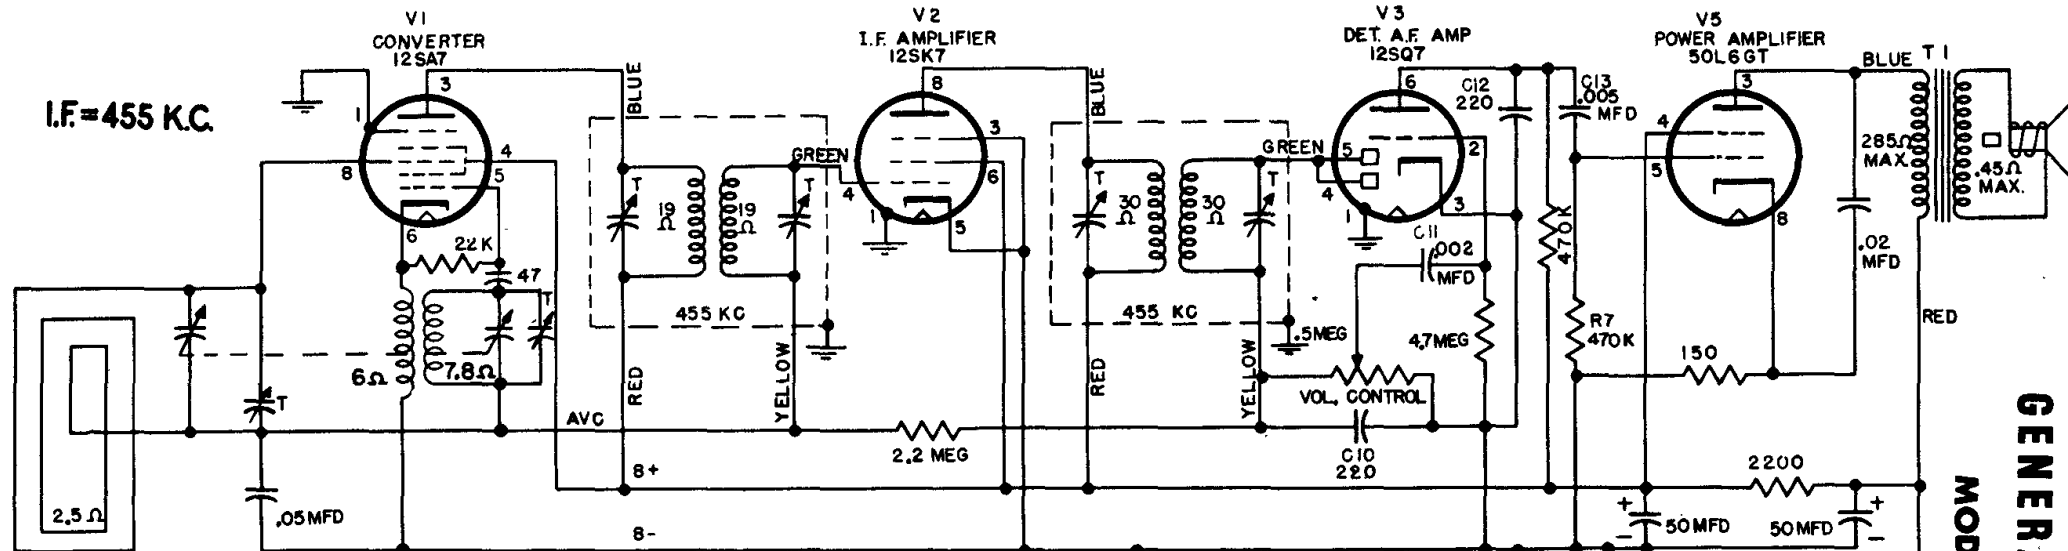





I.F.=455 K.C.

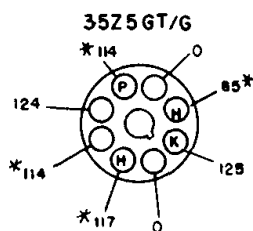

FRONT OF CHASSIS

LATE PRODUCTION CHANGES. Type 12BA6 used instead of 12SK7; note that pin connections differ. This new tube uses 47 ohm resistor from cathode to B-. R7 was changed to 1 megohm. T1 audio supplied with tapped primary.




VOLTAGES MEASURED BETWEEN SOCKET TERMINALS AND B- WITH 20,000 OHM PER VOLT METER. VOLUME CONTROL MINIMUM * INDICATES AC VOLTS

BOTTOM VIEW OF CHASSIS

CAPACITORS C10, 11, 12, AND C13


Some production receivers use a four-section ceramic unit incorporating capacitors C10, 11, 12 and C13. The ceramic unit, RCW-3013, is illustrated in Fig. 2 for lead identification to capacitor sections and chassis circuit wiring. Other receivers may be found to have individual component capacitors in place of the four-section ceramic unit.

Schematic Diagram, Model 135, 136

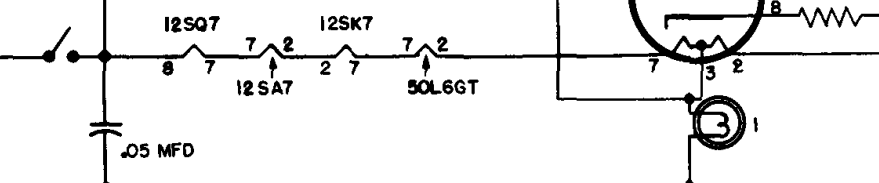

VALUE OF ALL CAPACITORS ARE M.M.F. UNLESS OTHERWISE SPECIFIED

Fig. 2. Capacitor RCW-3013 (K67J836)

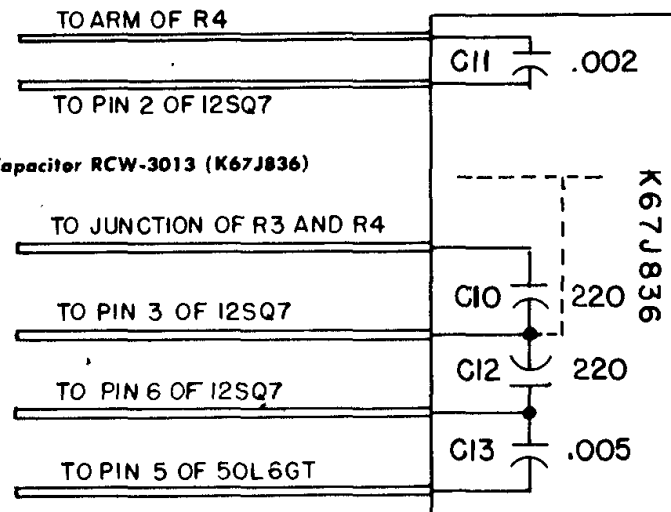

Models 123, 124, and 125, have a similar circuit to the one shown, but use a 50C5 instead of a 50L6GT, and a 35W4 instead of a 35Z5GT rectifier.

GENERAL ELECTRIC
MODELS 135 & 136