
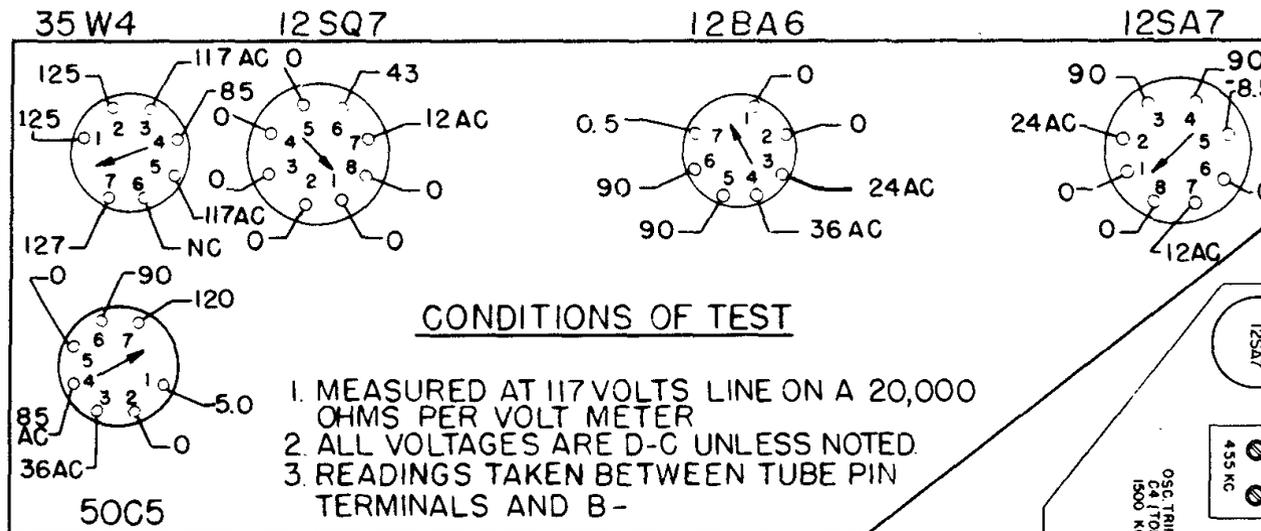


C16, C17, C19, AND C20

The lead identification for the four-section ceramic capacitor RCW-3013 (K67J836) can be observed from the illustration


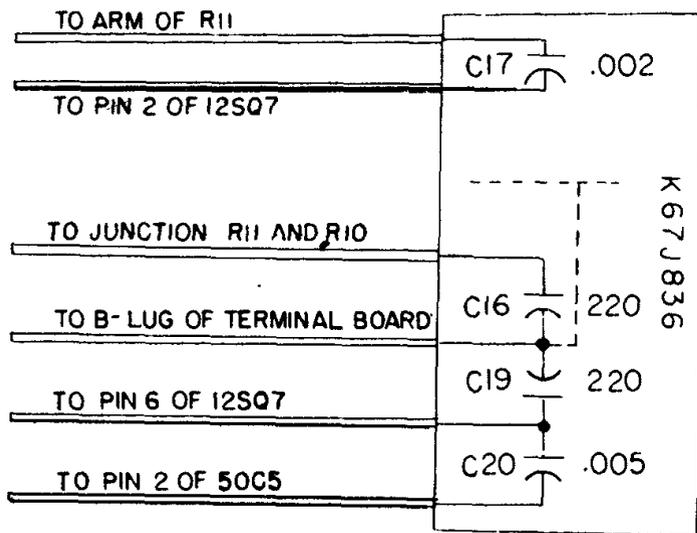


CONDITIONS OF TEST

1. MEASURED AT 117 VOLTS LINE ON A 20,000 OHMS PER VOLT METER
2. ALL VOLTAGES ARE D-C UNLESS NOTED.
3. READINGS TAKEN BETWEEN TUBE PIN TERMINALS AND B-

VIEWED FROM BOTTOM OF CHASSIS

For alignment of the oscillator and antenna trimmers, the input signal should be inductively coupled to the radio loop antenna, L1, by connecting a four-turn, six-inch diameter loop of bell wire across the signal generator output terminals, and then locating the loop to face the radio antenna loop about one foot away.

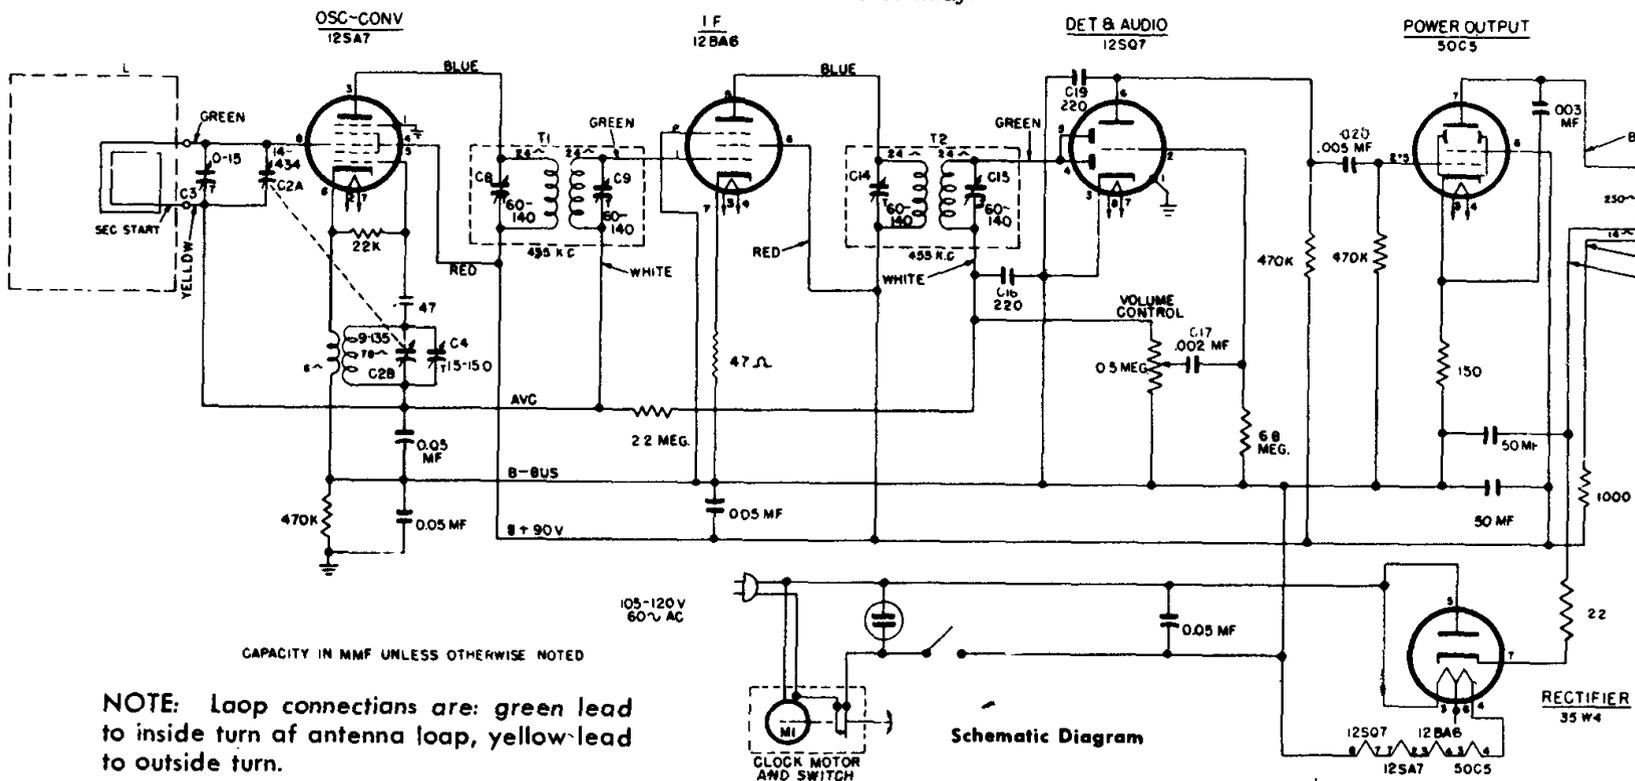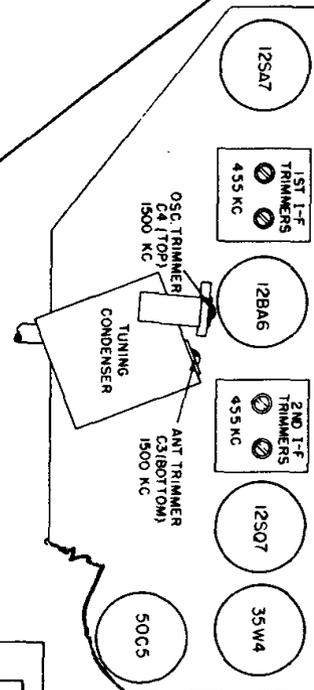

CAPACITY IN MMF UNLESS OTHERWISE NOTED

NOTE: Loop connections are: green lead to inside turn of antenna loop, yellow-lead to outside turn.

Service data for Models 509 & 530. A number of other G.E. Clock-Radio models such as: 64, 65, 66, 67, 500, 501, 505, 506, 507, & 508 are all most identical to Model 509 and 530.

GENERAL ELECTRIC