


25 L 6
25 L 6-G

25 L 6
25 L 6-G

BEAM POWER TETRODE
(E)

Vf	=	25	V.
If	=	0,3	A.
Va(max)	=	110	110
Vg2	=	110	110
Vg	=	-7,5	-7,5
la	=	49-54	50
Ig2	=	4-9	4-11
Ri	=	10.000	10.000
S	=	8,2	8,2
Wo(10%)	=	2,1	2,2
Ra	=	1.500	2.000
Rk	=	1.360	1.340
			Ω
			mA/V.
			Wtt.
			Ω
			Ω

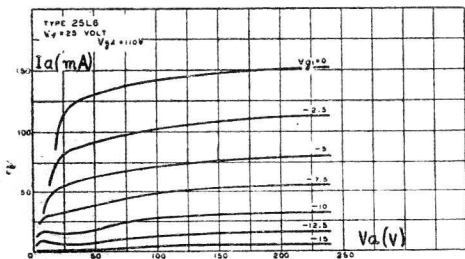

25L6 (G)