

MAZDA**30F5****30F5****HIGH SLOPE SCREENED H.F. PENTODE**

Indirectly heated—for series operation

GENERAL

The 30F5 is intended for use as a straight television pentode and is suitable for AC/DC series operation.

RATING

Heater Current (amps)	I_h	0.3
Heater Voltage (volts)	V_h	7.3
Maximum Anode Voltage (volts)	$V_a(\max)$	250
Maximum Screen Voltage (volts)	$V_{g2}(\max)$	250
Maximum Anode Dissipation (watts)	$P_a(\max)$	3§
Maximum Screen Dissipation (watts)	$P_{g2}(\max)$	1§
Maximum Heater to Cathode Voltage (volts) (r.m.s.)	$V_{h-k}(\max)$	200†
Maximum Resistance Control Grid to Cathode (k Ω)	$R_{g-k}(\max)$	600‡
Mutual Conductance (mA/V)	g_m	8.8*
Inner Amplification Factor	$\mu_{g1,g2}$	55*

* At $V_a = V_{g2} = 170$ volts. $V_{g1} = -1.85$

§ With a grid cathode resistance not exceeding 10,000 ohms

† From Cathode to higher potential heater pin

‡ With maximum anode dissipation 2 watts, maximum screen dissipation 0.5 watts and assuming a common anode and screen decoupling resistance of not less than 2,200 ohms $\pm 10\%$

INTER-ELECTRODE CAPACITANCES (pF)

		‡	§
Grid/Earth	c_{in}	9.0	10.3
Anode/Earth	c_{out}	4.4	5.7
Anode/Grid	c_{g1-a}	0.0073	0.0077

Inter-electrode Capacitances (continued overleaf)

HIGH SLOPE SCREENED H.F. PENTODE

Indirectly heated—for series operation

"Earth" denotes the remaining earthy potential electrodes, shields and heater joined to cathode.

‡ Inter-electrode capacitances with holder capacitance balanced out.

§ Total inter-electrode capacity including B9A ceramic holder without skirt or radial shield (Carr Fastener holder type 77,076).

DIMENSIONS

Maximum Overall Length (mm)	67.5
Maximum Diameter (mm)	22.2
Maximum Seated Height (mm)	6.5
Approximate Nett Weight (ozs)	$\frac{1}{2}$
Approximate Packed Weight (ozs)	1

MOUNTING POSITION—Unrestricted.TYPICAL OPERATION

Anode Voltage (volts)	V_a	170
Screen Voltage (volts)	V_{g2}	170
Grid Bias Voltage (volts)	V_{g1}	—1.85
Anode Current (mA)	I_a	10
Screen Current (mA)	I_{g2}	2.6
Mutual Conductance (mA/V)	g_m	8.8
Input Loss at 45 Mc/s (ohms)	$r_{g1-k(w)}$	16,000*
Equivalent grid noise resistance (ohms)	R_{eq}	750

* With grid circuit ONLY returned to pin 3

EDISWAN

MAZDA

30F5


HIGH SLOPE SCREENED H.F. PENTODE

Indirectly heated—for series operation

30F5

BULB—Clear

BASE—Noval (B9A)



Viewed from Free End of Pins

CONNECTIONS


Pin 1	Cathode	k
Pin 2	Control Grid	g1
Pin 3	Cathode	k
Pin 4	Heater	h
Pin 5	Heater	h
Pin 6	Shield	s
Pin 7	Anode	a
Pin 8	Screen Grid	g2
Pin 9	Suppressor Grid	g3

30F5

EDISWAN**MAZDA****30F5****HIGH SLOPE SCREENED H.F. PENTODE**

Indirectly heated—for series operation

AVERAGE CHARACTERISTIC CURVES: $I_a, I_{g2}/V_g$
 $V_a = 250V.$

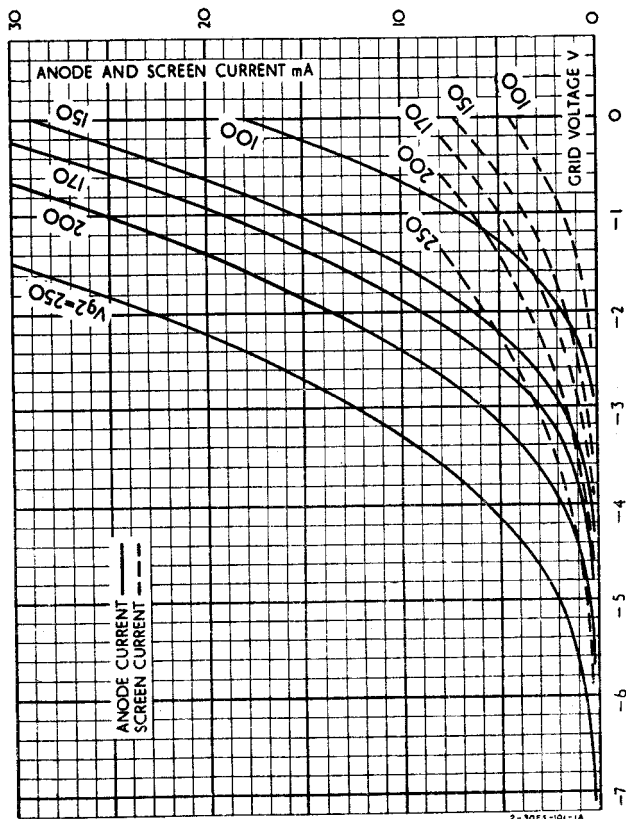

EDISWAN

MAZDA

30F5


30F5

HIGH SLOPE SCREENED H.F. PENTODE Indirectly heated—for series operation

AVERAGE CHARACTERISTIC CURVES: I_k/V_g

$V_a = 250V$.

Screen to Anode Current Ratio = 26% (approx.)

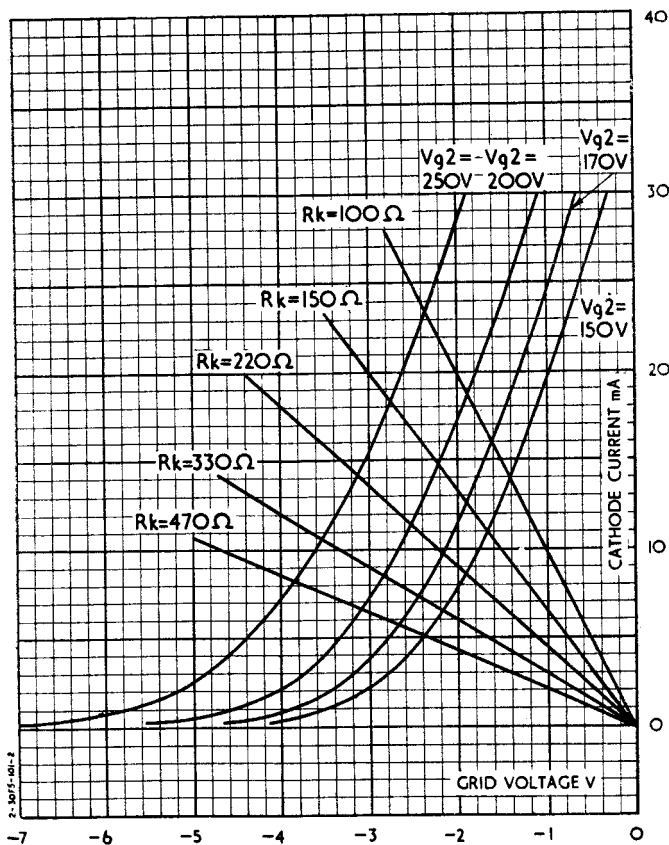

30F5


EDISWAN

MAZDA

30F5

HIGH SLOPE SCREENED H.F. PENTODE

Indirectly heated—for series operation

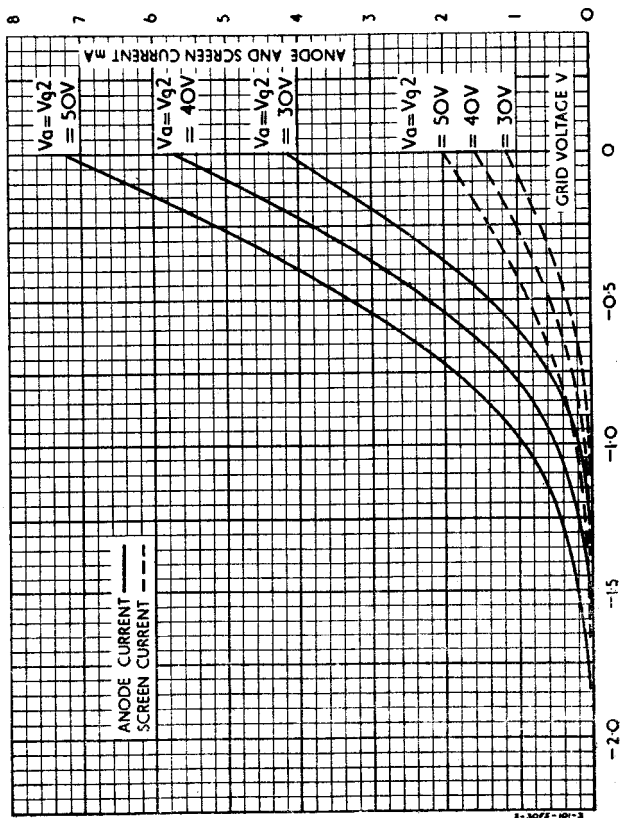AVERAGE CHARACTERISTIC CURVES: $i_a, i_{g2}/V_g$ 


EDISWAN

MAZDA

30F5

HIGH SLOPE SCREENED H.F. PENTODE
Indirectly heated—for series operation

AVERAGE CHARACTERISTIC CURVES: g_m/V_g
 $V_a = 250V.$

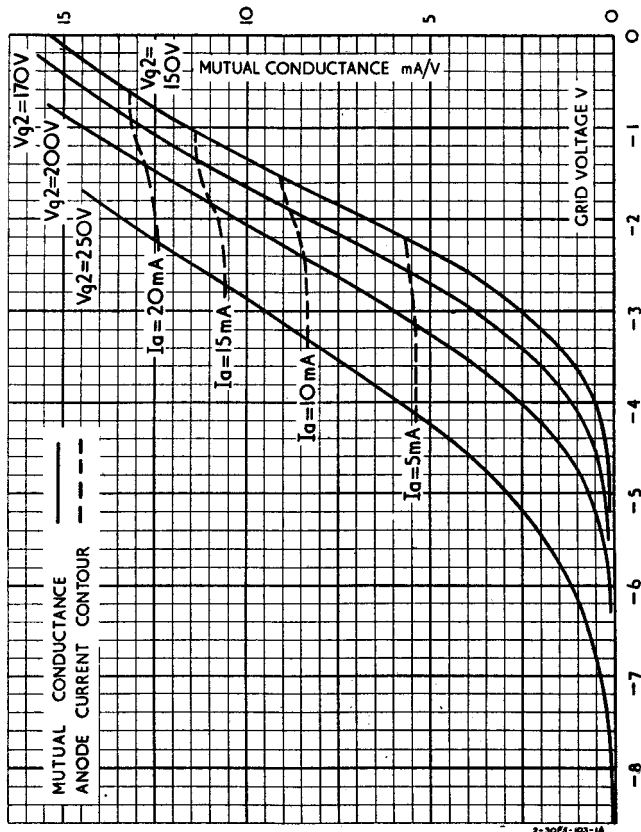


30F5

EDISWAN**MAZDA****30F5****HIGH SLOPE SCREENED H.F. PENTODE**

Indirectly heated—for series operation

AVERAGE CHARACTERISTIC CURVES: I_a , I_{g2} , I_{g1}/V_g

Used as a limiter in a synchronising separator circuit.

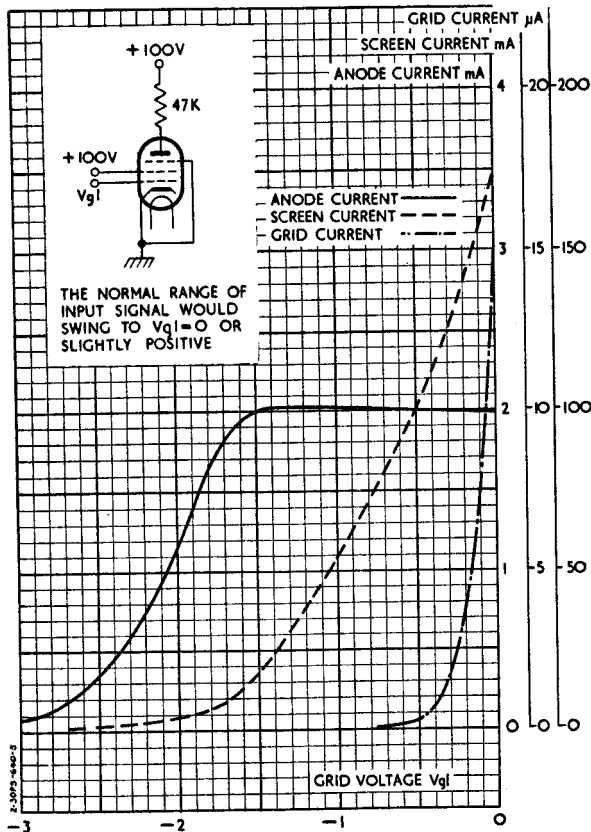


EDISWAN

MAZDA

30F5

HIGH SLOPE SCREENED H.F. PENTODE
Indirectly heated—for series operation

AVERAGE CHARACTERISTIC CURVES: $I_a, I_{g2}/V_a$
 $V_{g2} = 170V.$

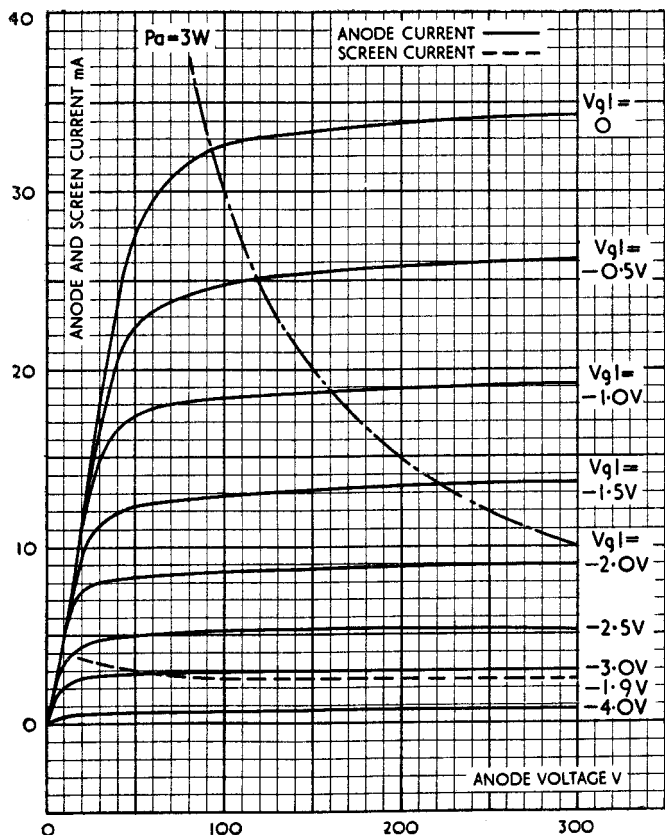

30F5


EDISWAN

MAZDA

30F5

HIGH SLOPE SCREENED H.F. PENTODE

Indirectly heated—for series operation

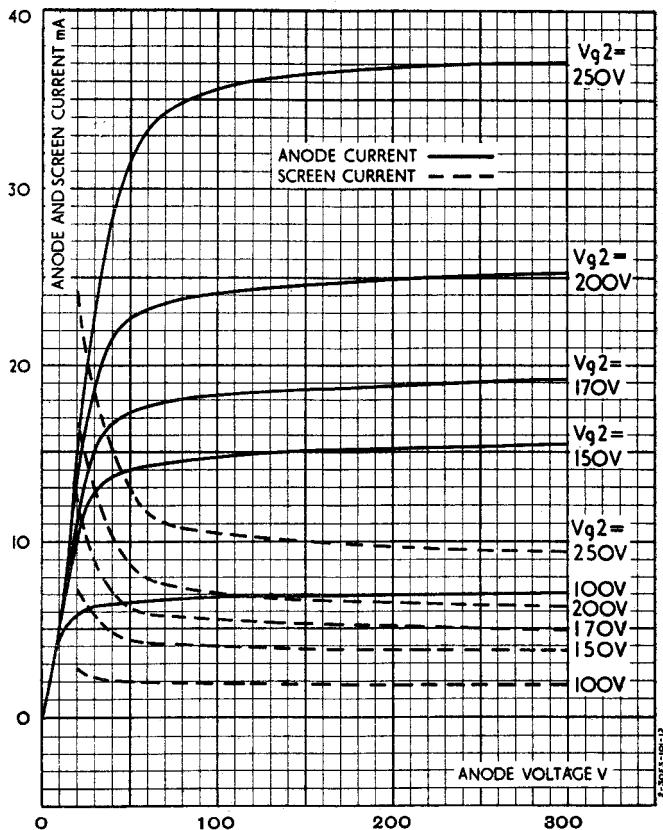AVERAGE CHARACTERISTIC CURVES: $I_a, I_{g2}/V_a$ $V_{g1} = -1.0V.$ 

EDISWAN

MAZDA

30F5


30F5

HIGH SLOPE SCREENED H.F. PENTODE Indirectly heated—for series operation

Average Characteristic Curves : r_{in} , g_m $\delta c/V_g$

$f = 38 \text{ Mc/s}$

See also "Test Circuit" overleaf.

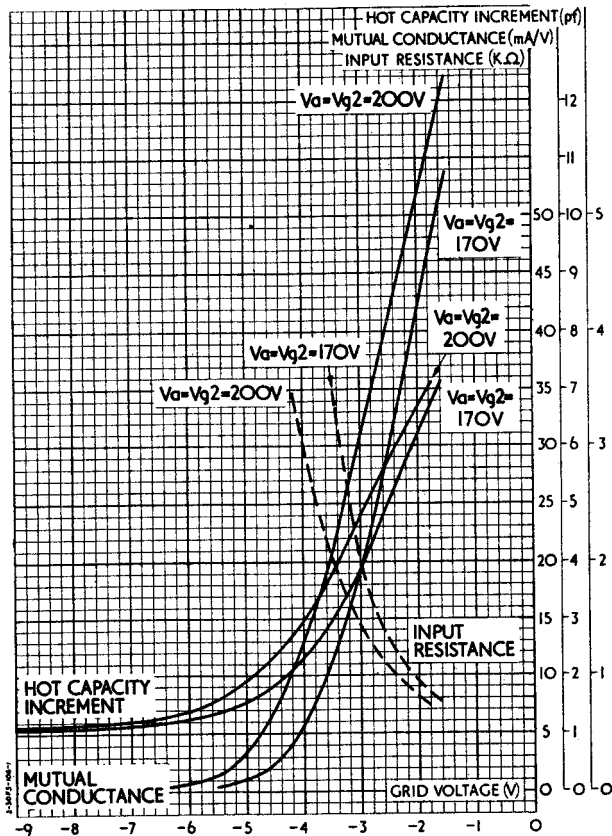

30F5

EDISWAN

MAZDA

30F5

HIGH SLOPE SCREENED H.F. PENTODE

Indirectly heated—for series operation

TEST CIRCUIT

for

Average Characteristics r_{in} , g_m $\delta c/V_g$ $f = 38 \text{ Mc/s.}$ 