


TUNG-SOL

DOUBLE TRIODE

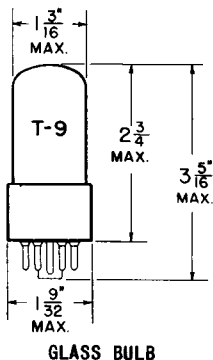


COATED UNIPOTENTIAL CATHODE

HEATER

12.6 VOLTS 0.3 AMP.

AC OR DC

ANY MOUNTING POSITION

**BOTTOM VIEW**INTERMEDIATE SHELL
8 PIN OCTAL

880

THE 12SN7GT COMBINES TWO MEDIUM-MU TRIODES IN ONE ENVELOPE. IT IS DESIGNED FOR USE AS A RESISTANCE COUPLED AMPLIFIER, OR COMBINED VERTICAL OSCILLATOR AND VERTICAL DEFLECTION AMPLIFIER IN TELEVISION RECEIVERS.

DIRECT INTERELECTRODE CAPACITANCES

WITH NO EXTERNAL SHIELD

	SECTION 1 ^A	SECTION 2 ^B	
GRID TO PLATE	3.8	4.0	μμf
INPUT	2.8	3.0	μμf
OUTPUT	0.8	1.2	μμf

^A CONNECTED TO PINS 4, 5 AND 6.^B CONNECTED TO PINS 1, 2 AND 3.**RATINGS**INTERPRETED ACCORDING TO DESIGN CENTER SYSTEM^CEACH SECTION^C

	CLASS A ₁ AMPLIFIER	VERTICAL DEFLECTION AMPLIFIER ^D	
HEATER VOLTAGE		12.6	VOLTS
MAXIMUM HEATER-CATHODE VOLTAGE:			
HEATER NEGATIVE WITH RESPECT TO CATHODE			
TOTAL DC AND PEAK		200	VOLTS
HEATER POSITIVE WITH RESPECT TO CATHODE			
DC		100	VOLTS
TOTAL DC AND PEAK		200	VOLTS
MAXIMUM PLATE VOLTAGE	300	300	VOLTS
MAXIMUM PEAK POSITIVE PLATE VOLTAGE (ABSOLUTE MAXIMUM)	---	1 200	VOLTS
MAXIMUM PLATE DISSIPATION			
EACH PLATE	3.5	3.5	WATTS
BOTH PLATES	5.0	5.0	WATTS
MAXIMUM PEAK NEGATIVE GRID VOLTAGE	---	250	VOLTS
MAXIMUM CATHODE CURRENT	20	20	MA.
MAXIMUM PEAK CATHODE CURRENT	---	70	MA.
MAXIMUM GRID CIRCUIT RESISTANCE	1.0	---	MEGOHMS
CATHODE BIAS	---	2.2	MEGOHMS

^C UNLESS OTHERWISE SPECIFIED.

^D FOR OPERATION IN A 525-LINE, 30-FRAME SYSTEM AS DESCRIBED IN "STANDARDS OF GOOD ENGINEERING PRACTICE FOR TELEVISION BROADCASTING STATIONS; FEDERAL COMMUNICATIONS COMMISSION". THE DUTY CYCLE OF THE VOLTAGE PULSE MUST NOT EXCEED 15% OF ONE SCANNING CYCLE.

→ INDICATES A CHANGE.

CONTINUED ON FOLLOWING PAGE

TUNG-SOL

CONTINUED FROM PRECEDING PAGE

RATINGS — CONT'D

INTERPRETED ACCORDING TO DESIGN CENTER SYSTEM


	VERTICAL ^E DEFLECTION OSCILLATOR	HORIZONTAL ^E DEFLECTION OSCILLATOR	
HEATER VOLTAGE	12.6		VOLTS
MAXIMUM HEATER-CATHODE VOLTAGE:			
HEATER NEGATIVE WITH RESPECT TO CATHODE			
TOTAL DC AND PEAK	200		VOLTS
HEATER POSITIVE WITH RESPECT TO CATHODE			
DC	100		VOLTS
TOTAL DC AND PEAK	200		VOLTS
MAXIMUM PLATE VOLTAGE	300	300	VOLTS
MAXIMUM PLATE DISSIPATION			
EACH PLATE	3.5	3.5	WATTS
BOTH PLATES	5.0	5.0	WATTS
MAXIMUM PEAK NEGATIVE GRID VOLTAGE	400	600	VOLTS
MAXIMUM AVERAGE CATHODE CURRENT	20	20	MA.
MAXIMUM PEAK CATHODE CURRENT	70	300	MA.
MAXIMUM GRID CIRCUIT RESISTANCE	2.2	2.2	MEG OHMS

^E FOR OPERATION IN A 525-LINE, 30-FRAME SYSTEM AS DESCRIBED IN "STANDARDS OF GOOD ENGINEERING PRACTICE FOR TELEVISION BROADCASTING STATIONS; FEDERAL COMMUNICATIONS COMMISSION". THE DUTY CYCLE OF THE VOLTAGE PULSE MUST NOT EXCEED 15% OF ONE SCANNING CYCLE.

TYPICAL OPERATING CONDITIONS AND CHARACTERISTICS

CLASS A₁ AMPLIFIER

HEATER VOLTAGE	12.6	VOLTS
HEATER CURRENT	0.3	AMP.
PLATE VOLTAGE	90	250
GRID VOLTAGE	0	-8.0
PLATE CURRENT	10	9.0
PLATE RESISTANCE (APPROX.)	6 700	7 700
TRANSCONDUCTANCE	3 000	2 600
AMPLIFICATION FACTOR	20	20
PLATE CURRENT AT $E_c = -12.5$ VOLTS	---	1.3
GRID VOLTAGE FOR $I_b = 10 \mu A$ (APPROX.)	-7.0	-18

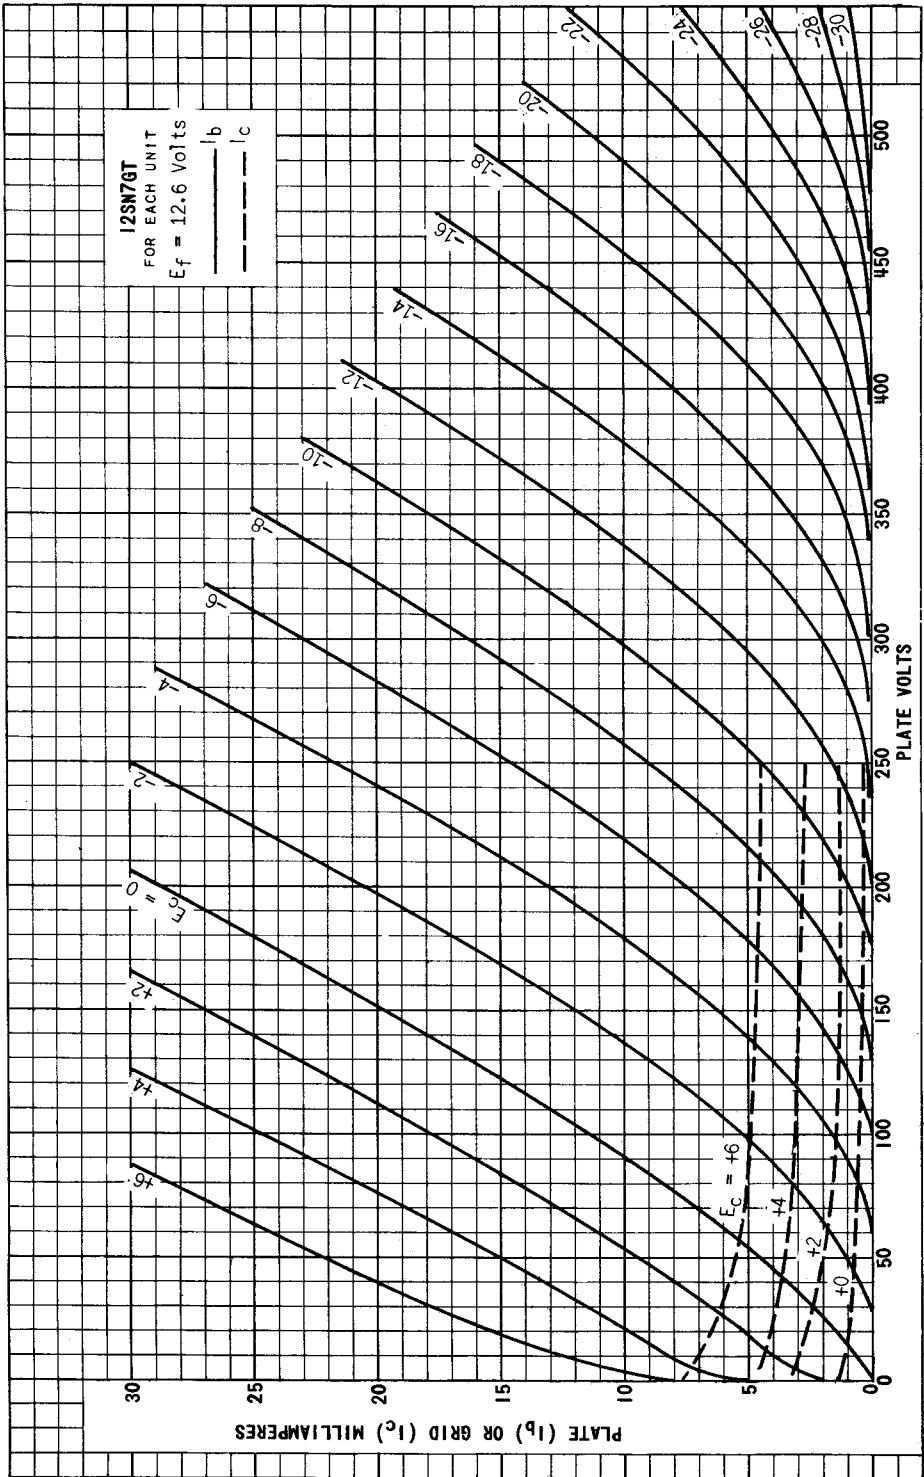

12SN7GT (6SN7GT)

