


R. C. A. VICTOR CO., INC.

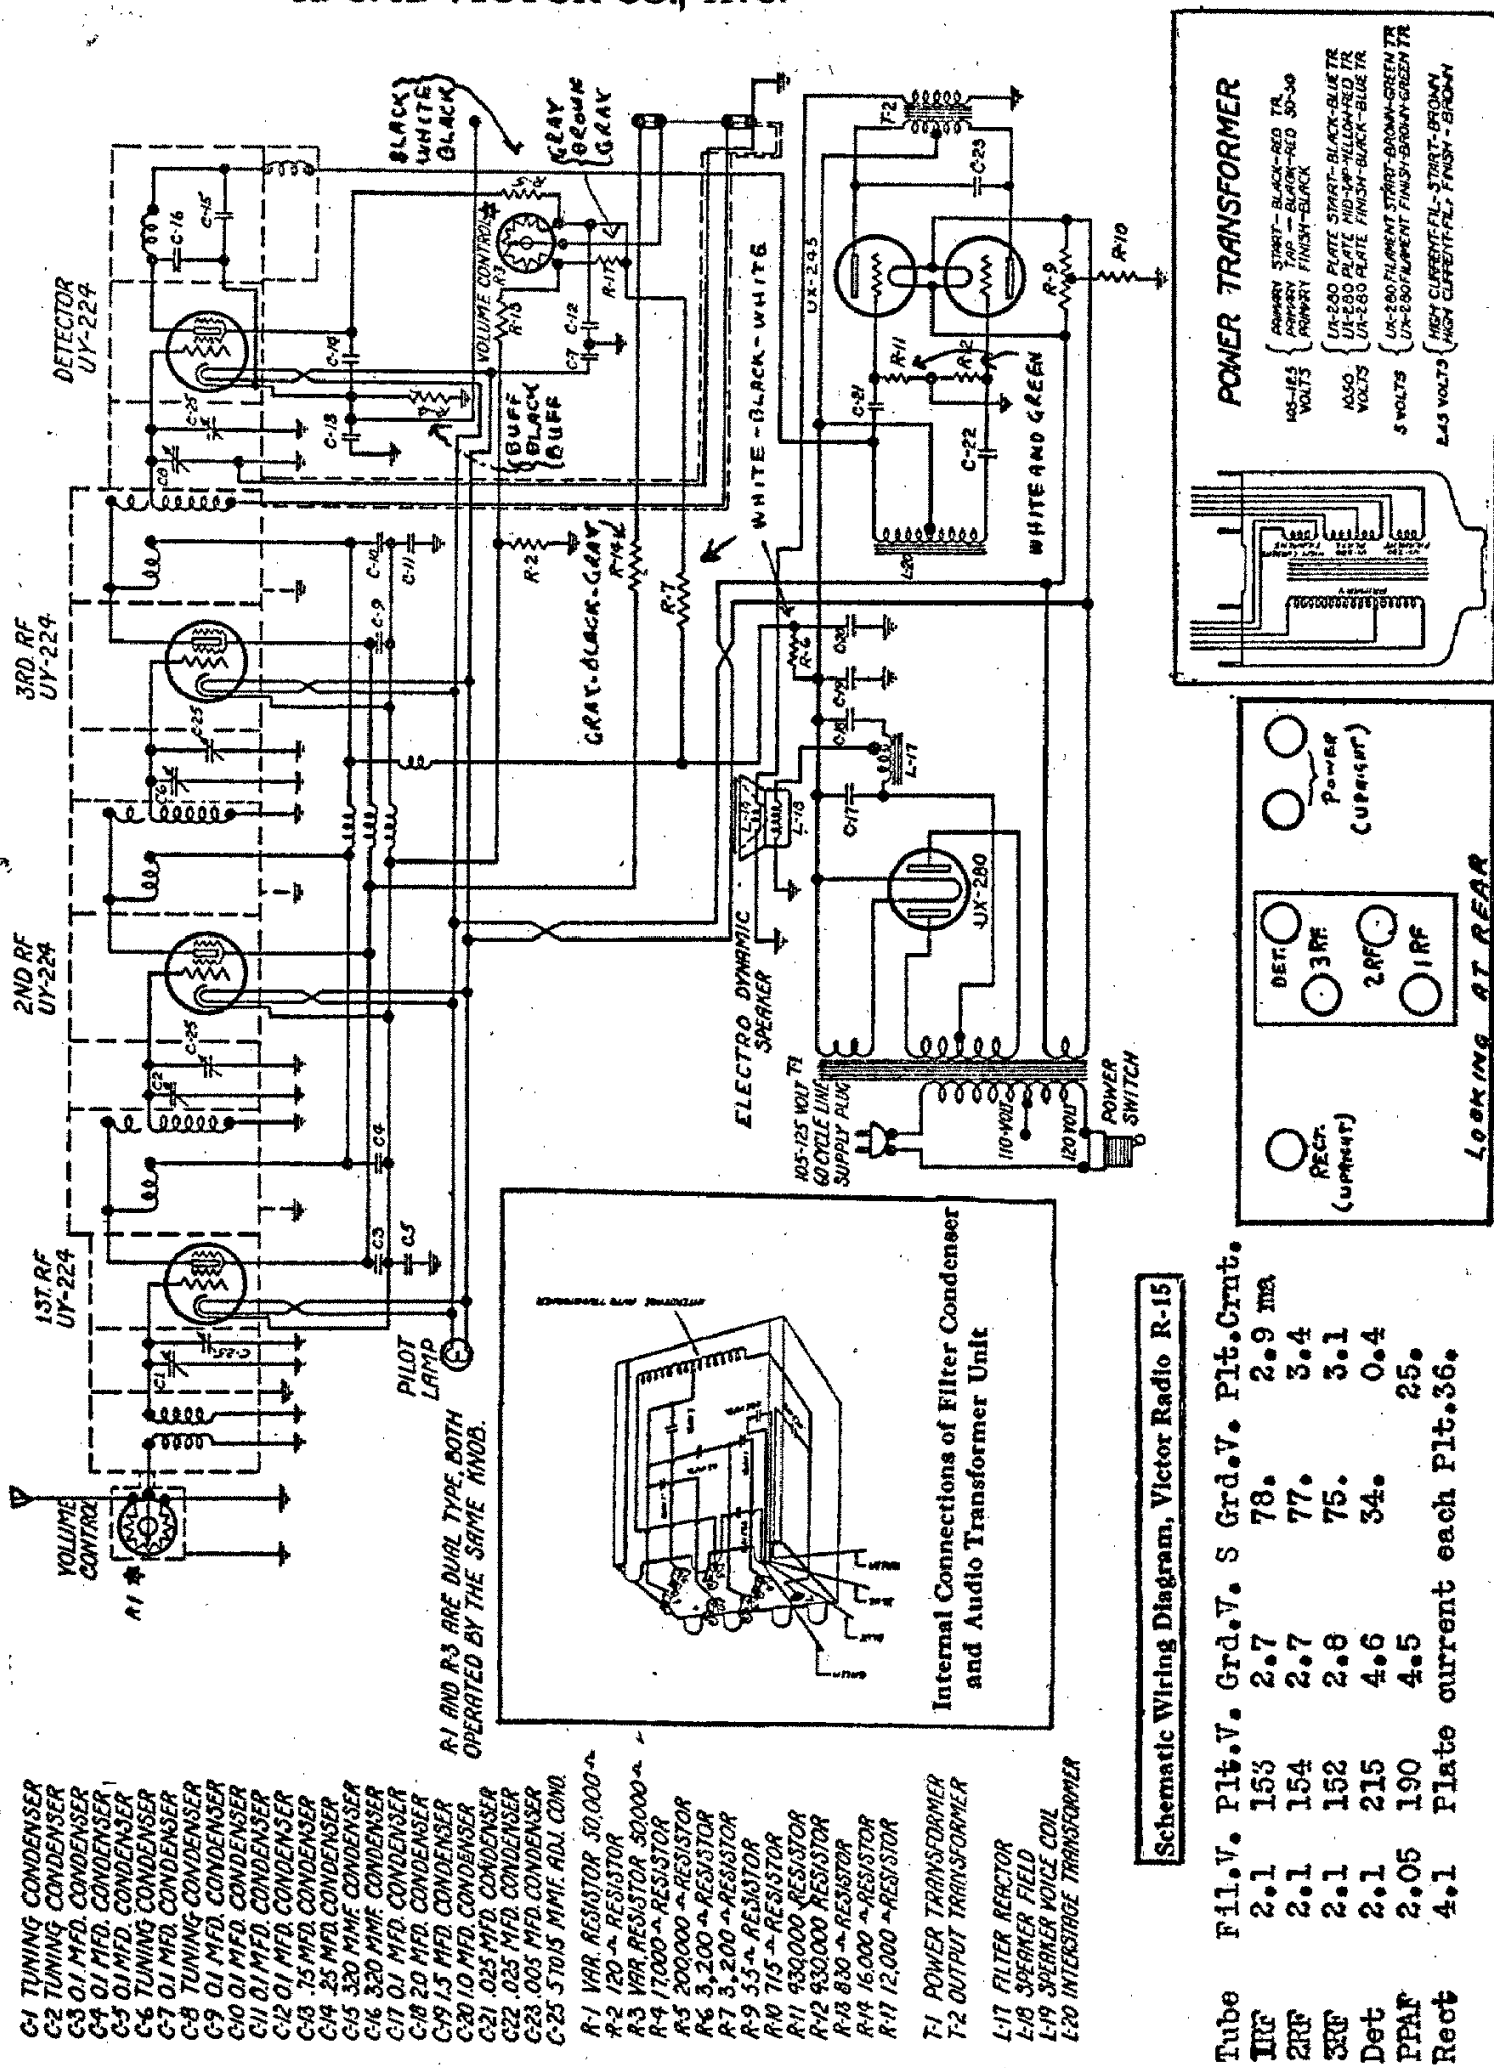

Schematic Wiring Diagram, Victor Radio R-15

Tube	Fil.V.	Plt.V.	Grd.V.	S Grd.V.	Plt.Crnt.
1RF	2.1	153	2.7	78.	2.9 ma
2RF	2.1	154	2.7	77.	3.4
3RF	2.1	152	2.8	75.	3.1
Det	2.1	215	4.6	34.	0.4
PPAF	2.05	190	4.5		25.
Rect	4.1			Plate current each	Plt.36.