


REDRESSEUR biplaque à chauffage indirect.

GZ 40

$$V_f = 5 \text{ V}$$

$$I_f = 0,75 \text{ A}$$

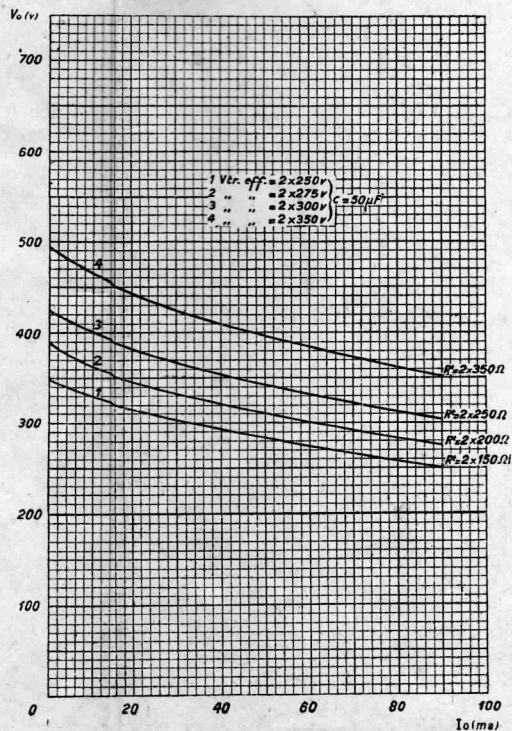

Vtr	2 x 250	2 x 275	2 x 300	2 x 350	Veff
I _o max.	90	90	90	90	mA
R _t min.	2 x 125	2 x 175	2 x 215	2 x 300	Ω
C max.	50	50	50	50	μF
V _{fk}	0	0	0	0	V

