

# RCA VICTOR

AC-DC Radio Receiver

## MODELS 1X591, 1X592

Chassis No. RC 1079K, RC 1079L

### Lead Dress


1. Dress all heater leads down to chassis and away from all audio grid and plate wiring.
2. Dress power cord against chassis base.
3. Dress capacitor C18 against back apron.
4. Dress capacitor C13 down to base alongside of shielded lead.
5. Dress output transformer leads down to chassis.
6. Dress capacitors C9 and C15 as direct as possible.
7. Dress dial lamp leads on top of chassis between 12SQ7 and 50L6GT tubes; below chassis, as short as possible to rectifier socket.
8. Dress excess loop leads away from tubes and clear of tuning condenser.

**Test-Oscillator.**—For all alignment operations, connect the low side of the test-oscillator to the receiver chassis, and keep the oscillator output as low as possible to avoid a-v-c action.

On AC operation an isolation transformer (115 v./115 v.) may be necessary for the receiver if the test oscillator is also AC operated.

### Dial Calibration

With the tuning condenser fully meshed, the dial pointer should be set to the first score mark at the left-hand end of the dial back plate. The four score marks represent:  
 Max. cap.      600 kc      1400 kc      min. cap.

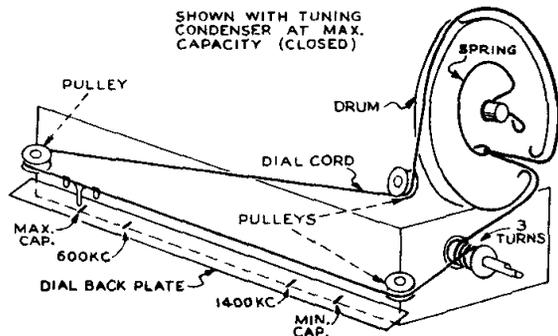


Dial Indicator and Drive Cord

### Alignment Procedure


Steps	Connect the high side of test-oscillator to—	Tune test-osc. to—	Turn radio dial to—	Adjust the following for max. output
1	12SK7 I-F grid through 0.1 mfd. capacitor	455 kc	Quiet-point 1600 kc end of dial	T2 (top and bottom) 2nd I-F trans.
2	Stator of C1 through 0.1 mfd.			*T1 (top and bottom) 1st I-F trans.
3	Short wire placed near loop to radiate signal	1620 kc	Min. cap.	C4 (osc.)
4		1400 kc	1400 kc signal	†C2 (ant.)
5		600 kc	600 kc signal	L3 (osc.) Rock gang
6	Repeat steps 3, 4 and 5.			

\* Do not readjust T2 when test oscillator is connected to C1.

† When adjusting C2 (ant. trimmer) it is necessary to have the speaker and loop in the same position and spacing as they will have when assembled in the cabinet.

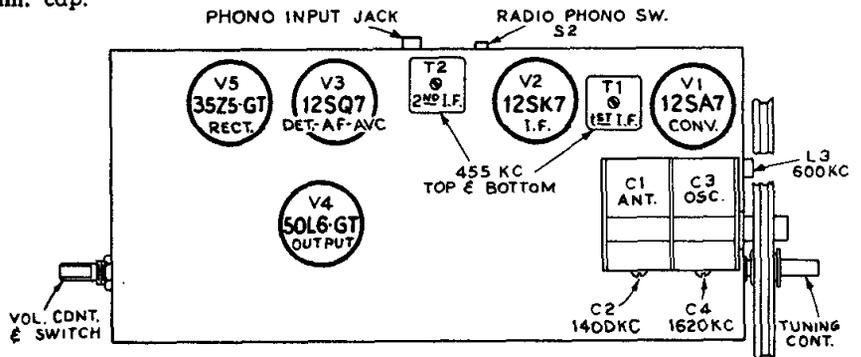

Tube and Trimmer Locations

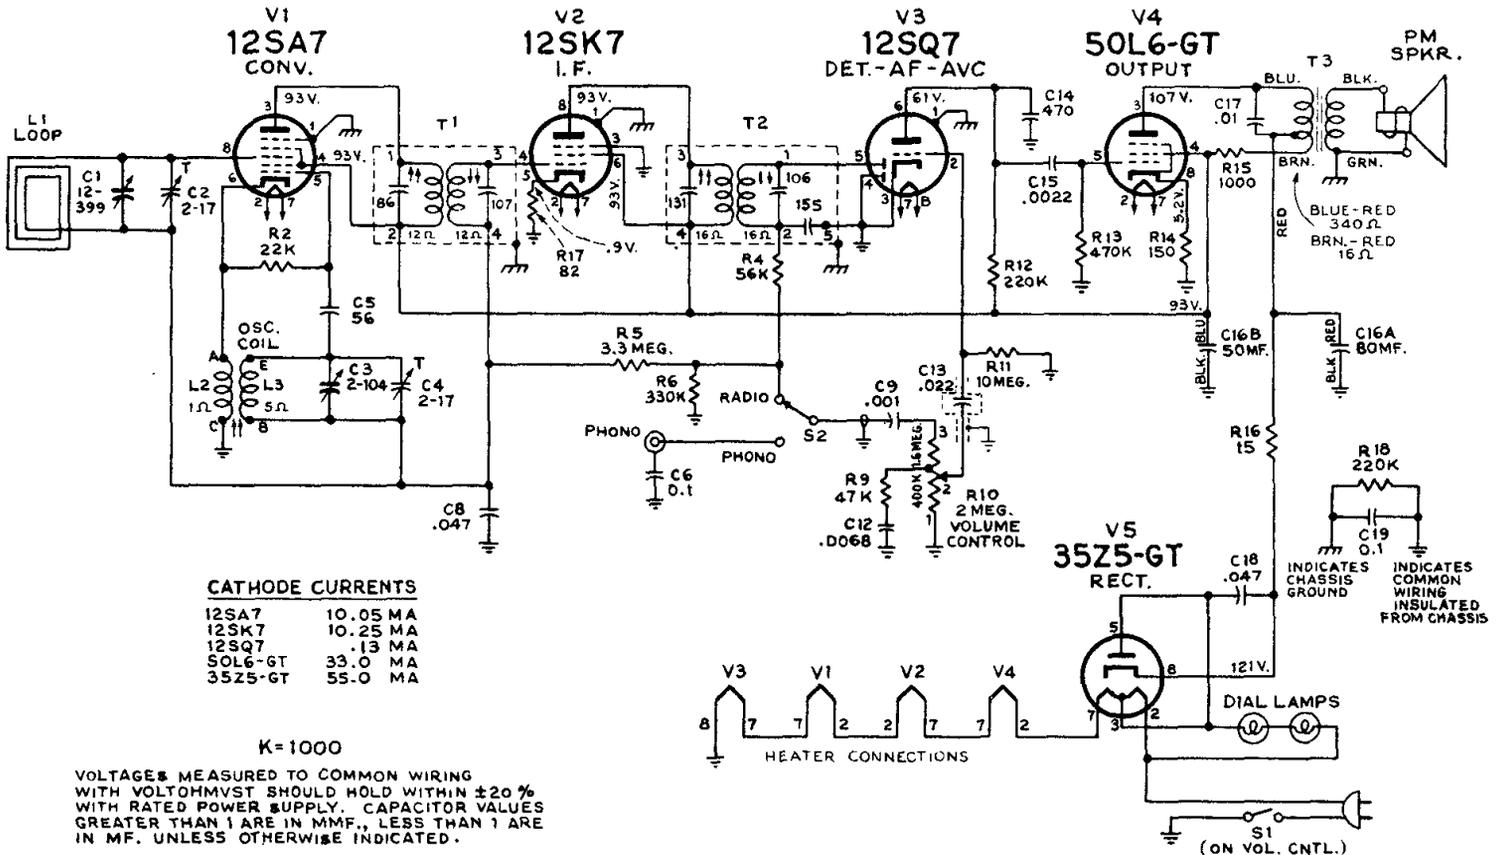

#### CATHODE CURRENTS

12SA7	10.05 MA
12SK7	10.25 MA
12SQ7	.13 MA
50L6-GT	33.0 MA
35Z5-GT	55.0 MA

K=1000

VOLTAGES MEASURED TO COMMON WIRING WITH VOLTOHMVST SHOULD HOLD WITHIN ±20% WITH RATED POWER SUPPLY. CAPACITOR VALUES GREATER THAN 1 ARE IN MMF., LESS THAN 1 ARE IN MF. UNLESS OTHERWISE INDICATED.

