




### BOTTOM VIEW OF CHASSIS

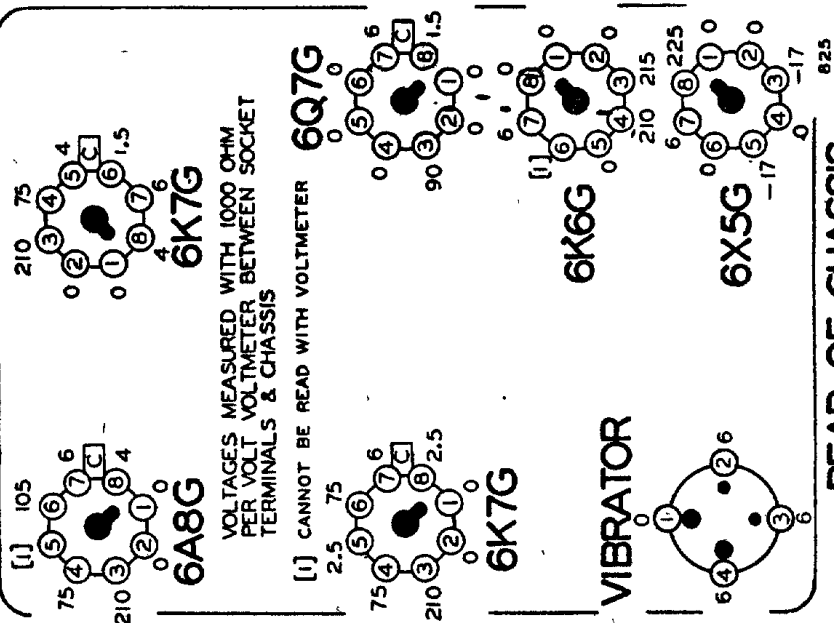

## REAR OF CHASSIS

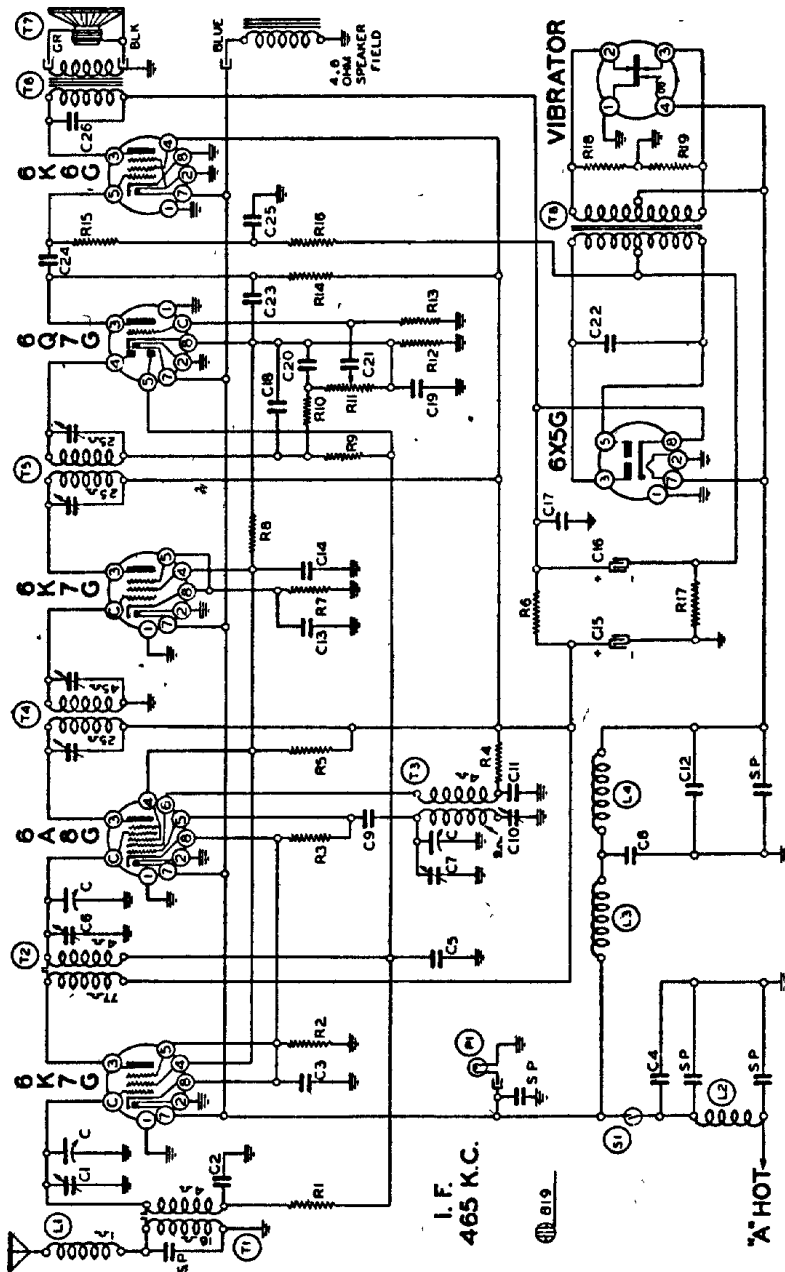

# IDE3000

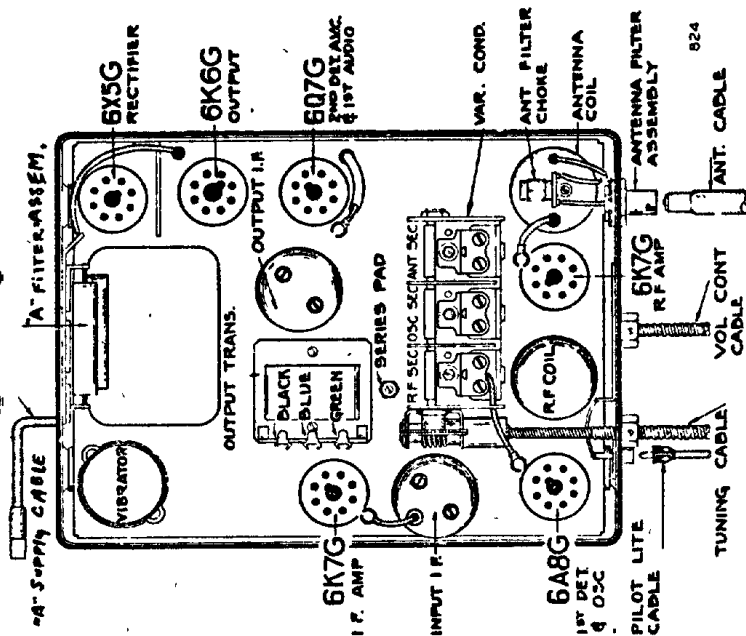

Circuit Diagram Reference	Part No.	Description
R1	13020	RESISTORS
R2	13054	100M ohm— $\frac{1}{2}$ w.
R3	130162	50M ohm— $\frac{1}{2}$ w.
R4	130208	40M ohm— $\frac{1}{2}$ w.
R5	13030	25M ohm—1 watt
R6	130279	1M ohm—1 watt
R7	13079	400 ohm— $\frac{1}{2}$ w.
R8	130139	40M ohm— $\frac{1}{2}$ w.
R9	13079	1 megohm— $\frac{1}{2}$ w.
R10	13012	50M ohm— $\frac{1}{2}$ w.
R11	1041	500M ohm volume control
R12	130153	700 ohm— $\frac{1}{2}$ w.
R13	13019	1 megohm— $\frac{1}{2}$ w.
R14	130141	250M ohm— $\frac{1}{2}$ w.
R15	130278	300M ohm— $\frac{1}{2}$ w.
R16	13011	250M ohm— $\frac{1}{2}$ w.
R17	130277	400 ohm—1 watt
C	10226	CONDENSERS
C1	10063	3 gang variable condenser
C2	10063	Antenna Trimmer on gang
C3	10031	.05 x 200 v.
C4	10063	.1 x 200 v.
C5	10022	.05 x 200 v.
C6	10022	.5 x 120 v.
C7	10031	R. F. Trimmer on Gang
C8	10031	Oscillator Trimmer on Gang
C9	12912	.5 x 120 v.
C10	12437	.00025 mica
C11	10020	350 mmfd. W C. Series Pad
C12	10031	.1 x 200 v.
C13	10020	.5 x 120 v.
C14	10053	.1 x 200 v.
C15	11965C	.25 x 400 v.
C16	11965C	16 mfd. lytic—350 w. v.
C17	10011	16 mfd. lytic—350 w. v.
C18	1295	.01 x 400 v.
C19	10011	.01 x 400 v.
C20	1295	.0001 Mica
C21	10011	.01 x 400 v.
C22	100100	.008 x 1600 v.
C23	1295	.0001 Mica
C24	10011	.01 x 400 v.
C25	10020	.1 x 200 v.
C26	10054	.006 x 600 v.
		C2 and C3 in same unit
		PARTS
T1	11171	Antenna Coil
T2	10935	R. F. Coil
T3	11057	Oscillator Coil
T4	10896B	Input L. F.—465 kc.
T5	10898	Output L. F.—465 kc.
T6	10637	Output Transformer
T7	11459	5" Dynamic Speaker (4.6 Ohm Field)
T8	104159B	Power Transformer
L1	11176	Antenna Filter Choke
L2	10526	"A" Choke
L3	10524	"A" Choke
L4	10519	"A" Choke
P1	10797	6-8 v. pilot light
S1		Off-on switch on volume control