

CONDENSERS

Code No.	Part No.	Description
C1	102116	2 gang variable condenser
C2	10011	.01 x 400 v.
C3	129132	.000125 mica
C4	10026	.02 x 400 v.
C5	1001	B.C. Antenna Trimmer
C6	1006	.1 x 400 v.
C7	1295	.25 x 200 v.
C8	1295	.0001 mica
C9	1295	B.C. Oscillator Trimmer
C10	11994	40 mfd.—150 w.v. lytic
C11	11994	20 mfd.—150 w.v. lytic
C12	11994	20 mfd.—150 w.v. lytic
C13	1009	.05 x 200 v.
C14	1295	.0001 mica

Code No.	Part No.	Description
C15	12939	.00005 mica
C16	10025	.002 x 600 v.
C17	10026	.02 x 400 v.
C18	100110	.2 x 400 v.
C19	1295	.0001 mica
C20	100106	.004 x 600 v.


C10, C11 and C12 are in same unit

Code No.	Part No.	Description
----------	----------	-------------

RESISTORS

Code No.	Part No.	Description
R1	130100	150M ohm— $\frac{1}{4}$ w.
R2	130168	100 ohm— $\frac{1}{4}$ w.
R3	130100	150M ohm— $\frac{1}{4}$ w.
R4	130218	5M ohm— $\frac{1}{4}$ w.
R5	13020	100M ohm— $\frac{1}{4}$ w.
R6	130215	25 ohm— $\frac{1}{4}$ w.
R7	13094	50M ohm— $\frac{1}{4}$ w.
R8	130296	200 ohm—1 w.
R9	130287	1200 ohm—1 w.
R10	130248	40 ohm— $\frac{1}{4}$ w.
R11	1304	3 megohm— $\frac{1}{4}$ w.
R12	130166	150 ohm— $\frac{1}{4}$ w.
R13	13012	50M ohm— $\frac{1}{4}$ w.
R14	10193	1 megohm volume control
R15	1303	500M ohm— $\frac{1}{4}$ w.
R16	1309	200M ohm— $\frac{1}{4}$ w.

Code No.	Part No.	Description
R17	130257	5 megohm— $\frac{1}{4}$ w.

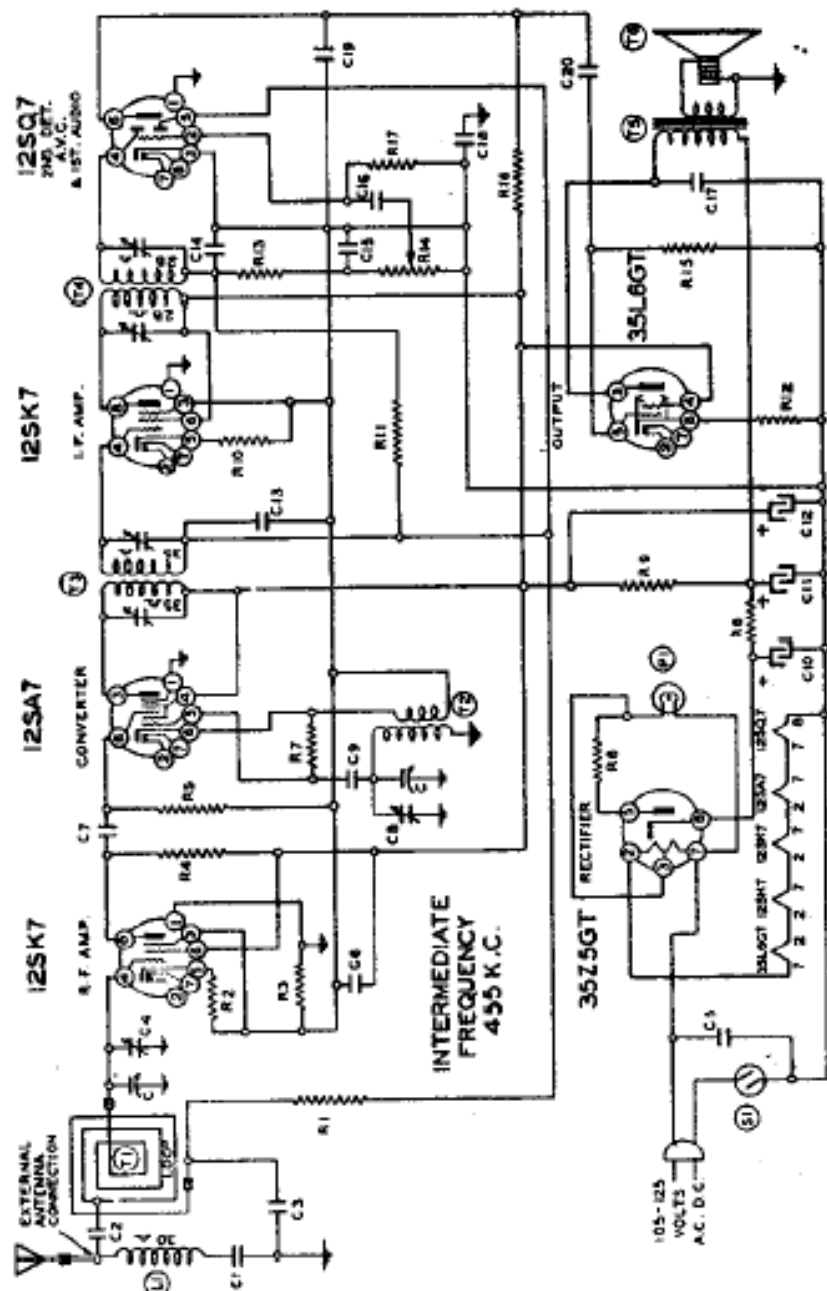

NO. 196


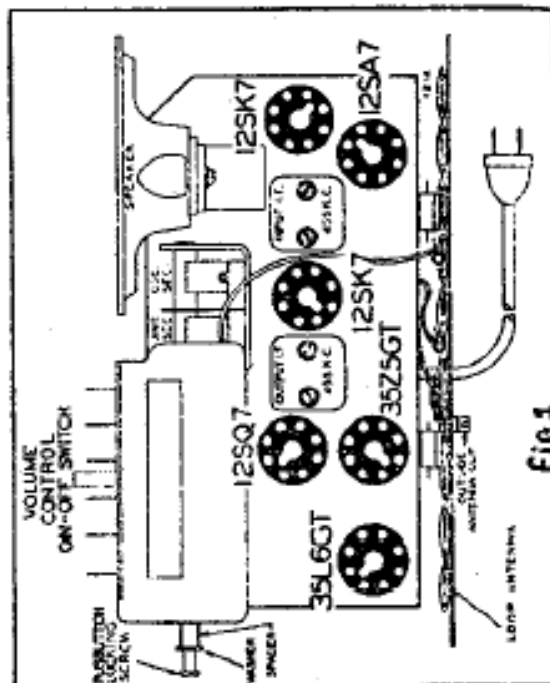


Fig. 1

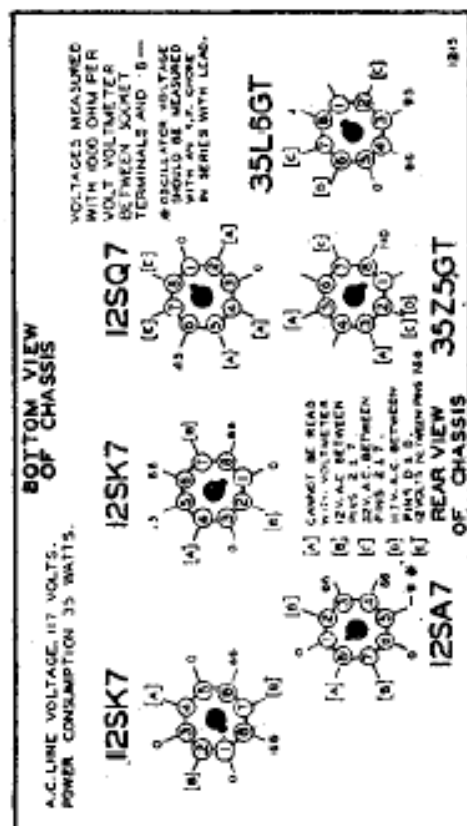

A.C. LINE VOLTAGE 117 VOLTS.
POWER CONSUMPTION 35 WATTS.

BOTTOM VIEW
OF CHASSIS

REAR VIEW
OF CHASSIS