


# WESTERN AUTO SUPPLY CO.

MODEL D1124

MODEL D1182

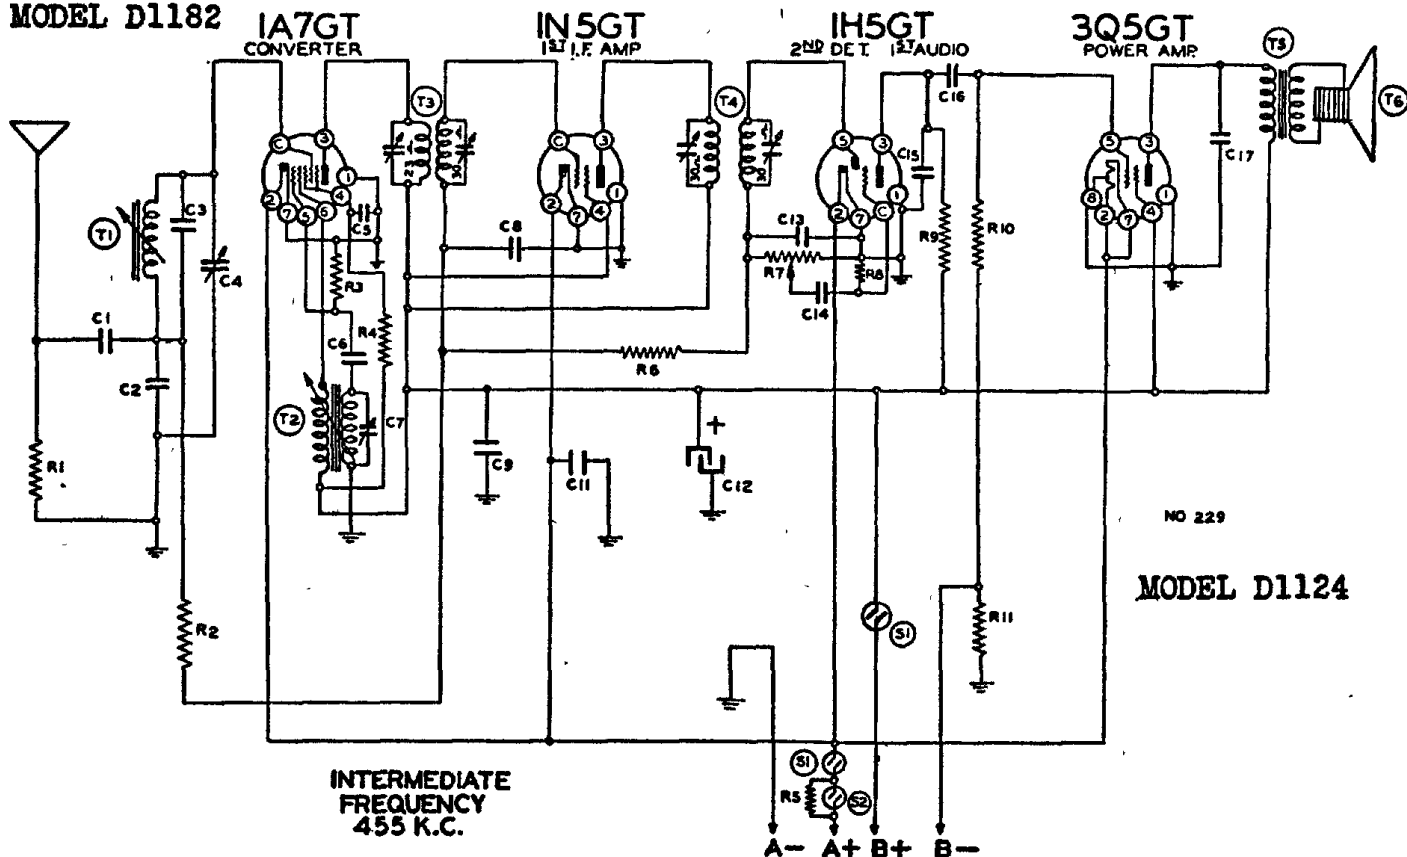


NO 229

MODEL D1124

## BOTTOM VIEW OF CHASSIS

VOLTAGES MEASURED WITH A HIGH RESISTANCE VOLTMMETER BETWEEN SOCKET TERMINAL AND CHASSIS.

[X] CANNOT BE MEASURED WITH A VOLTMMETER.

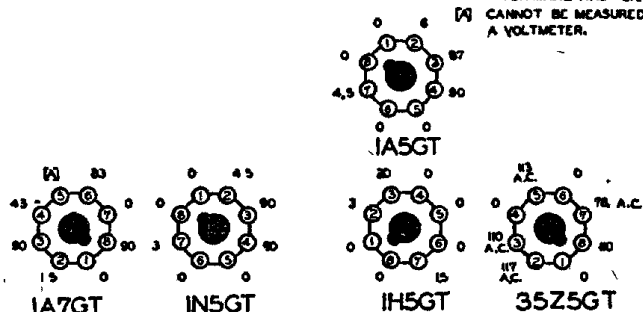

REAR OF CHASSIS

MODEL D1182

MODEL D1182

MODEL D1124

Code Part No. Description

## RESISTORS

R1	13082	10M ohm— $\frac{1}{2}$ w.
R2	1304	3 megohm— $\frac{1}{2}$ w.
R3	1309	200M ohm— $\frac{1}{2}$ w.
R4	130194	35M ohm— $\frac{1}{2}$ w.
R5	130346	.56 ohm— $\frac{1}{2}$ w. wire wound
R6	1304	3 megohm— $\frac{1}{2}$ w.
R7	101210	1 megohm—volume control and switch— $\frac{1}{2}$ w.
R8	130257	5 megohm— $\frac{1}{2}$ w.
R9	13068	1 megohm— $\frac{1}{2}$ w.
R10	130146	2 megohm— $\frac{1}{2}$ w.
R11	13079	400 ohm— $\frac{1}{2}$ w.


## CONDENSERS

C1	129114	.0003 mica
C2	100112	.001 x 200 v.
C3	129177	.000045—ceramicon
C4	124165	Antenna trimmer
C5	10022	.05 x 200 v.—condenser
C6	12912	.00025 mica
C7	124165	Oscillator trimmer
C8	10022	.05 x 200 v. condenser
C9	1006	.25 x 200 v. condenser
C11	10017	.5 x 120 v.
C12	119117	10 mfd. x 150 v. lytic
C13	12940	.0001 mica
C14	10012	.003 x 600 v. condenser
C15	12940	.0001 mica
C16	10026	.02 x 400 v. condenser
C17	1007	.005 x 600 v.

C4 and C7 are in same unit.

## PARTS

T1	13613	Antenna coil permeability tuning assem. complete
T2	13613	Oscillator coil permeability tuning assem. complete
T3	108202B	Input I.F. coil 455 Kc.
T4	108153C	Output I.F. coil 455 Kc.
T5	10591C	Output transformer
T6	114213	4" PM speaker
S1		Switch-on volume control
S2	12588B	Battery potential switch

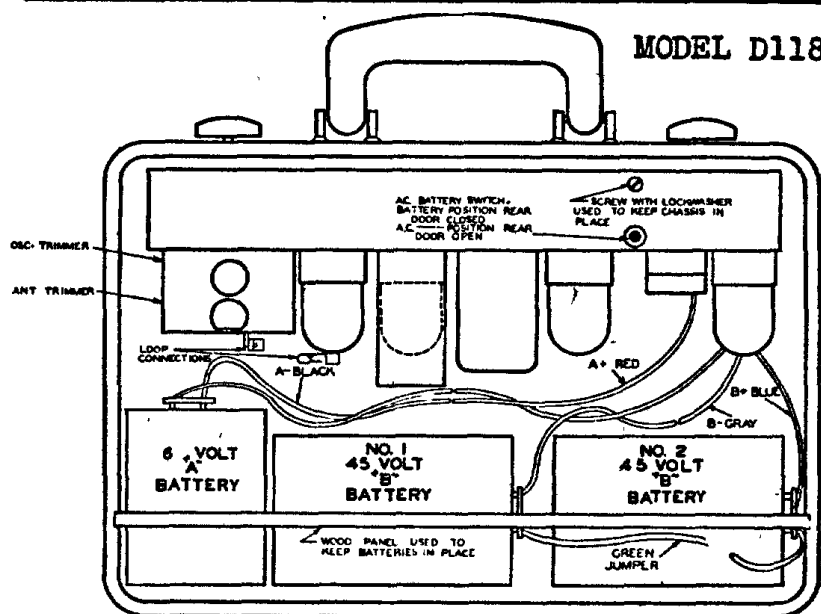

**BATTERY CONNECTIONS**—When replacing batteries connect cables as shown above.