

MODELS 6D015-6D030


Zenith Radio Corp.

CHASSIS No. 6C05

The filter circuits of chassis 6C05 incorporate new features that should be well understood by the service man. An examination of the schematic drawing will show the output transformer tapped slightly off center. This tap is the B + connection from filter resistor R11 and capacitor C19 off the cathode of the rectifier 35Z5 to the 35L6 plate. The lower connection of the output transformer feeds B + to the rest of the tubes in the receiver. Current flowing through the upper windings of the output transformer to the 35L6 produces a magnetic field which is 180° out of phase with the magnetic field produced by current flowing in the opposite direction through the output transformer to the rest of the receiver, therefore, most of the AC hum is cancelled. Further reduction of hum is accomplished by filtering through resistor R10 and 12 and capacitors C17 and 18.

This development in filtering systems allows a higher effective plate voltage on the 35L6 for increased power output.

NOTE: The output transformer must be replaced with an exact duplicate, Part No. 206-547. Be sure to add the speaker code letter to the transformer part number.

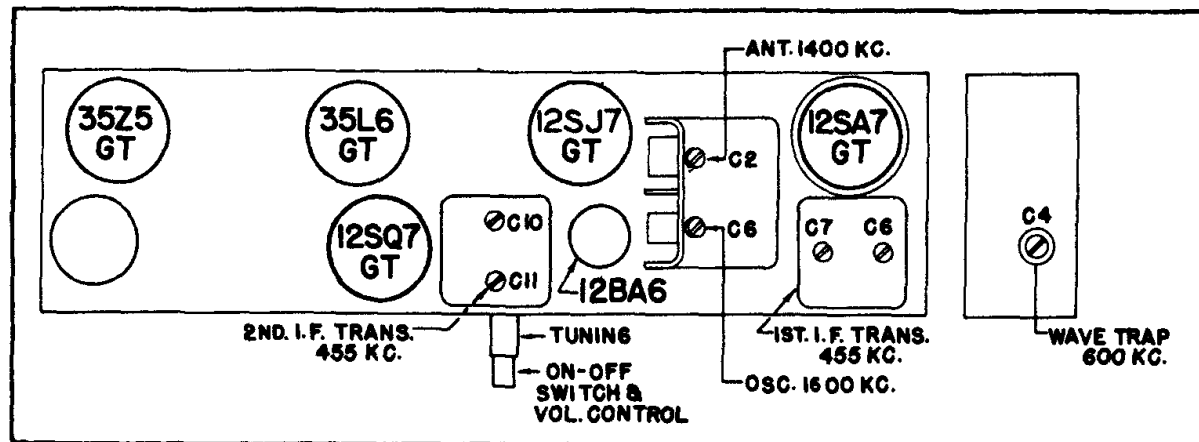**TUBE AND TRIMMER LOCATION****ALIGNMENT PROCEDURE**

OPERATION	CONNECT OSCILLATOR	DUMMY TO ANTENNA	INPUT SIG. FREQUENCY	SET DIAL AT	TRIMMERS	PURPOSE
1	Converter Grid	.5 Mfd.	455 Kc.	600 Kc.	C-6, C-7, C-10, C-11	I.F. Alignment
2	Single Turn Loosely Coupled to Wave Magnet		455 Kc.	600 Kc.	C-4	Adjust Wave Trap to minimum.
3			1600 Kc.	1600 Kc.	C-8	Set Oscillator to Dial Scale.
4			1400 Kc.	1400 Kc.	C-2	Antenna Alignment


MODELS 6D015-6D030
CHASSIS No. 6C05

Zenith Radio Corp.

The filter circuits of chassis 6C05 incorporate new features that should be well understood by the service man. An examination of the schematic drawing will show the output transformer tapped slightly off center. This tap is the B + connection from filter resistor R11 and capacitor C19 off the cathode of the rectifier 35Z5 to the 35L6 plate. The lower connection of the output transformer feeds B + to the rest of the tubes in the receiver. Current flowing through the upper windings of the output transformer to the 35L6 produces a magnetic field which is 180° out of phase with the magnetic field produced by current flowing in the opposite direction through the output transformer to the rest of the receiver, therefore, most of the AC hum is cancelled. Further reduction of hum is accomplished by filtering through resistor R10 and 12 and capacitors C17 and 18.

This development in filtering systems allows a higher effective plate voltage on the 35L6 for increased power output.

NOTE: The output transformer must be replaced with an exact duplicate, Part No. 206-547. Be sure to add the speaker code letter to the transformer part number.

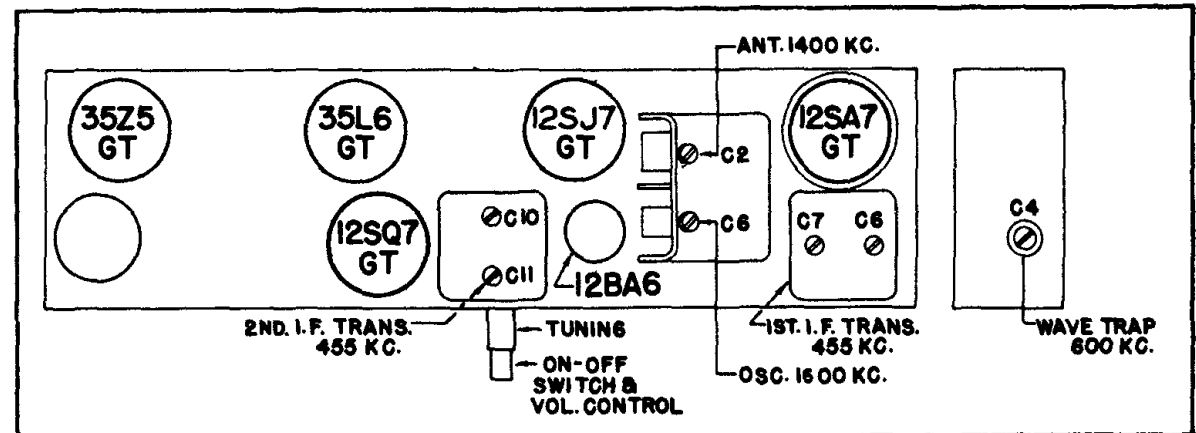

TUBE AND TRIMMER LOCATION

ALIGNMENT PROCEDURE

OPERATION	CONNECT OSCILLATOR	DUMMY TO ANTENNA	INPUT SIG. FREQUENCY	SET DIAL AT	TRIMMERS	PURPOSE
1	Converter Grid	.5 Mfd.	455 Kc.	600 Kc.	C-6, C-7, C-10, C-11	I.F. Alignment
2	Single Turn Loosely Coupled to Wave Magnet		455 Kc.	600 Kc.	C-4	Adjust Wave Trap to minimum.
3			1600 Kc.	1600 Kc.	C-8	Set Oscillator to Dial Scale.
4			1400 Kc.	1400 Kc.	C-2	Antenna Alignment