
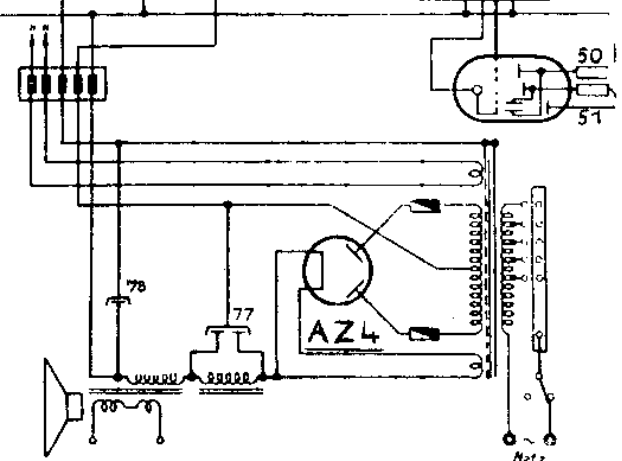


ZF = 470 kHz.

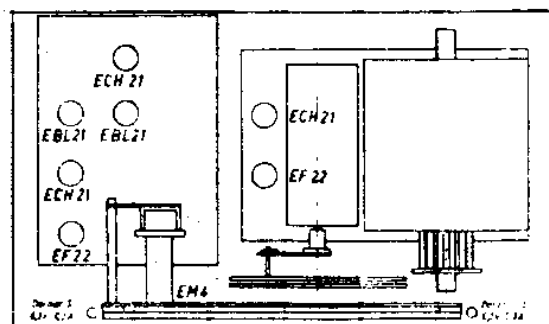

Sondyna A.G.
Zürich

Sondyna

E 4320

Kondensatoren

C 1	Drehko	DUCATI 3416/15 EC	C 40	100	pf	2%	Keramisch
2	200	pf 10%	41	2	pf 10%		Keramisch
3	50	pf 2%	42	2	pf 10%		Keramisch
4	30	pf 2%	43	200	pf 1%		Glimmer
5	100	pf 10%	44	200	pf 1%		Glimmer
6	0,05	mf 500 Volt	45	0,05	mf 1500 Volt		Papier
7	0,05	mf 1500 "	46	0,05	mf 500 "		Papier
8	0,05	mf 1500 "	47	0,1	mf 1500 "		Papier
9	30	pf 2%	48	200	pf 1%		Glimmer
10	50	pf 2%	49	50	pf 10%		Glimmer
11	100	pf 10%	50	200	pf 1%		Glimmer
12	0,1	mf 1500 "	51	100	pf 10%		Glimmer
13	0,05	mf 500 "	52	100	pf 10%		Glimmer
14	30	pf 2%	53	0,05	mf 500 "		Papier
15	50	pf 2%	54	0,1	mf 1500 "		Papier
15a	5-20	pf	55	50	pf 10%		Glimmer
15b	5	pf 10%	56	50	pf 10%		Glimmer
16	100	pf 10%	57	100	pf 10%		Glimmer
17	50	pf 10%	58	50	mf 12		Elektr.
18	20	pf 10%	59	0,5	mf 1500		Papier
19	10'000	pf 500 "	60	10'000	pf 500		Papier
20	5-20	pf	61	5'000	pf 500		Papier
21	5-20	pf	62	3'000	pf 1500		Papier
22	5-20	pf	63	50	pf 10%		Glimmer
23	30	pf 10%	64	10'000	pf 500		Papier
24	5	pf 10%	65	100	mf 12		Elektr.
25	5-20	pf	66	0,5	mf 1500		Papier
26	5-20	pf	67	30	pf 10%		Glimmer
27	5-20	pf	68	5'000	pf 1500		Papier
28	10	pf 10%	69	10'000	pf 1500		Papier
29	5-20	pf	70	2'000	pf 1500		Papier
30	5-20	pf	71	0,05	mf 500		Papier
31	5-20	pf	72	50	mf 12		Elektr.
32	120	pf 1%	73	2'000	pf 1500		Papier
33	300	pf 1%	74	50	mf 12		Elektr.
34	4000	pf 5%	75	0,05	mf 500		Papier
35	100	pf 2%	76	1'000	pf 1500		Papier
36	100	pf 2%	77	2 x 30	mf 540		Elektr.
37	100	pf 2%	78	60	mf 540		Elektr.
38	100	pf 2%	79	500	pf 10%		Glimmer
39	100	pf 2%					

Widerstände

R 1	0,5 mega-Ohm	1/4 Watt	R 27	300 kilo-Ohm	1/2 Watt
2	2,0 kilo-Ohm	1/2 "	28	200 kilo-Ohm	1/4 "
	(2,7)		29	100 kilo-Ohm	1 "
3	0,1 mega-Ohm	1 "	30	0,1 mega-Ohm	1/4 "
4	0,5 mega-Ohm	1/4 "	31	20 kilo-Ohm	2 "
5	25 kilo-Ohm	2 "	32	0,5 mega-Ohm	1/4 "
6	50 kilo-Ohm	1/4 "	33	0,5 mega-Ohm	1/4 "
7	50 kilo-Ohm	1/4 "	34	0,2 mega-Ohm	1/4 "
8	20 kilo-Ohm	1 "	35	1 kilo-Ohm	1/4 "
9	2 kilo-Ohm	1/2 "	36	200 Ohm	1/4 "
	(2,7)		37	1 mega-Ohm	1/4 "
10	0,5 mega-Ohm	1/4 "	38	1 mega-Ohm	1/4 "
11	50 kilo-Ohm	1 "	39	20 kilo-Ohm	1 "
12	2 kilo-Ohm	1/2 "		(25)	
	(2,7)		40	75 Ohm	1 "
13	0,1 mega-Ohm	1/2 "	41	0,5 mega-Ohm	1/4 "
14	0,1 mega-Ohm	1/4 "	42	1 kilo-Ohm	1/4 "
15	0,3 mega-Ohm	1/4 "	43	40 kilo-Ohm	1/4 "
16	0,2 mega-Ohm	1/4 "	44	10 kilo-Ohm	1/4 "
17	0,5 mega-Ohm	1/4 "	45	0,1 mega-Ohm	1/4 "
18	10 mega-Ohm	1/4 "	46	0,1 mega-Ohm	1/4 "
19	1 kilo-Ohm	1/4 "	47	30 Ohm	1/2 "
20	400 kilo-Ohm	1/4 "	48	0,5 mega-Ohm	1/4 "
21	100 kilo-Ohm	1/4 "	49	0,5 mega-Ohm	1/4 "
22	0,5 mega-Ohm	1/4 "	50	1 mega-Ohm	1/4 "
23a	1,0 mega-Ohm	1/4 "	51	1 mega-Ohm	1/4 "
23b	0,5 mega-Ohm	1/4 "	52	200 Ohm	1/4 "
24	0,5 mega-Ohm	1/4 "	53	0,5 mega-Ohm	1/4 "
25	1,0 mega-Ohm	1/4 "	54	20 kilo-Ohm	1/4 "
26	600 Ohm	1/4 "			

Sondyna

E 4320