


# STR-434L

AEP Model  
UK Model  
SCN Model

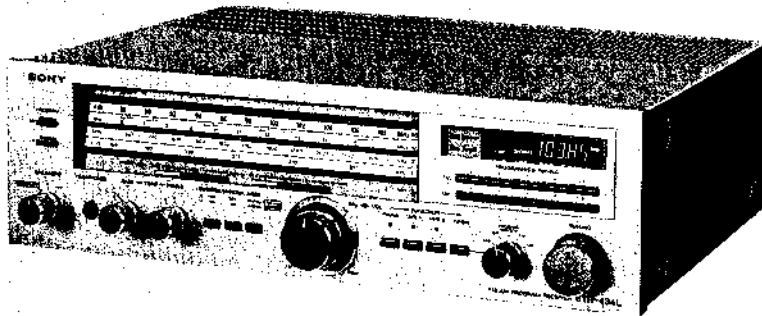

## FM-AM PROGRAM RECEIVER

### SPECIFICATIONS


#### GENERAL

<b>System:</b>	Superheterodyne FM/AM tuner, Direct coupled pure-complementary symmetry power amplifier circuit (SEPP OTL)
<b>Power Requirements:</b>	UK model: 240 V ac (or 220 V ac adjustable by authorized Sony personnel), 50 Hz AEP, SCN model: 220 V ac (or 240 V ac adjustable by authorized Sony personnel), 50 Hz
<b>Power Consumption:</b>	UK model: 380 W AEP, SCN model: 290 W
<b>AC Outlets:</b>	Two unswitched, total 200 W (not provided for SCN model)
<b>Dimensions:</b>	Approx. 430 (w) x 135 (h) x 370 (d) mm 17 (w) x 5 1/4 (h) x 14 5/8 (d) inches including projecting parts and controls
<b>Weight:</b>	Approx. 9.3 kg, 20 lb 9 oz (net) Approx. 10.5 kg, 23 lb 3 oz (in shipping carton)

#### FM TUNER SECTION

<b>Tuning Range:</b>	87.5 – 108 MHz
<b>Antenna Terminals:</b>	300 $\Omega$ balanced 75 $\Omega$ unbalanced
<b>Intermediate Frequency:</b>	10.7 MHz
<b>Sensitivity at 50dB Quieting:</b>	3.5 $\mu$ V, 16.1 dB (mono) 45 $\mu$ V, 38.3 dBf (stereo)
<b>Sensitivity at 46dB Quieting (at 40kHz deviation):</b>	4.0 $\mu$ V (mono) 50 $\mu$ V (stereo)
<b>Usable Sensitivity:</b>	IHF 1.8 $\mu$ V, 10.3 dBf 1.6 $\mu$ V (S/N = 26 dB, 40 kHz deviation)
<b>Signal-to-noise Ratio:</b>	75 dB (mono) 70 dB (stereo)
<b>Harmonic Distortion:</b>	0.15 % (mono) 0.3 % (stereo) at 1 kHz
<b>IM Distortion:</b>	0.15 % (mono) 0.3 % (stereo)

#### SAFETY-RELATED COMPONENT WARNING!!

COMPONENTS IDENTIFIED BY SHADING AND MARK  ON THE SCHEMATIC DIAGRAMS, EXPLODED VIEWS AND IN THE PARTS LIST ARE CRITICAL TO SAFE OPERATION. REPLACE THESE COMPONENTS WITH SONY PARTS WHOSE PART NUMBERS APPEAR AS SHOWN IN THIS MANUAL OR IN SUPPLEMENTS PUBLISHED BY SONY.

— Continued on page 2 —

# SONY<sup>®</sup>

## SERVICE MANUAL

# STR-434L

**Separation:** 45 dB at 1 kHz  
**Frequency Response:** 40 Hz – 12.5 kHz  $\begin{matrix} +0.5 \text{ dB (DIN)} \\ -1 \end{matrix}$   
 30 Hz – 15 kHz  $\begin{matrix} +0.5 \text{ dB (IHF)} \\ -2 \end{matrix}$   
**Selectivity at 300kHz:** 55 dB  
 (at 40kHz deviation,  
 S/N = 26dB)  
**Capture Ratio:** 1.0 dB  
**AM Suppression Ratio:** 54 dB  
**Image Response Ratio:** 75 dB  
**Spurious Response Ratio:** 75 dB  
**Muting Threshold:** Approx. 5  $\mu$ V

## SW/MW/LW TUNER SECTION

	SW	MW	LW
<b>Tuning range</b>	5.8 MHz – 15.8 MHz	522 kHz – 1,602 kHz	150 kHz – 350 kHz
<b>Antenna</b>	External antenna terminal	Built-in ferrite rod antenna, External antenna terminal	
<b>Intermediate frequency</b>	450 kHz		
<b>Usable sensitivity</b>	30 $\mu$ V, external antenna (10 MHz)	250 $\mu$ V/m, built-in antenna (1,000 kHz) 100 $\mu$ V, external antenna (1,000 kHz)	500 $\mu$ V/m, built-in antenna (230 kHz) 100 $\mu$ V, external antenna (230 kHz)
<b>Signal-to noise ratio</b>	52 dB (5 mV)	52 dB (50 mV/m)	52 dB (50 mV/m)
<b>Harmonic distortion</b>	0.3 % (5 mV, 400 Hz)	0.3 % (50 mV/m, 400 Hz)	0.3 % (50 mV/m, 400 Hz)
<b>Selectivity</b>	50 dB (9 kHz)	50 dB (9 kHz)	50 dB (9 kHz)

## AMPLIFIER SECTION

**Continuous RMS Power Output:** at 20 Hz – 20 kHz  
 (less than 0.08% THD, both channels driven simultaneously)  
 at 1 kHz  
 40 + 40 W (8  $\Omega$ )  
 40 + 40 W (4  $\Omega$ )  
 43 + 43 W (8  $\Omega$ )  
 43 + 43 W (4  $\Omega$ )  
 according to DIN 45500  
 40 + 40 W (8  $\Omega$ )  
 40 + 40 W (4  $\Omega$ )

**Dynamic Power Output:** 130 W (8  $\Omega$ )  
 (IHF constant power supply method) 130 W (4  $\Omega$ )

**Power Bandwidth (IHF):** 10 Hz – 40 kHz

**Damping Factor:** 20 at 1 kHz, 8  $\Omega$

**Harmonic Distortion:** Less than 0.08 % at rated output  
 Less than 0.08 % at 1 W output

**Intermodulation (IM) Distortion:** Less than 0.08 % at rated output  
 (60Hz : 7kHz = 4 : 1) Less than 0.08 % at 1 W output

**Residual Noise:** Less than 0.08  $\mu$ V at 8  $\Omega$

### Inputs:

	Sensitivity	Impedance	S/N	Weighting network
PHONO	2.5 mV	50 k $\Omega$	80 dB	A
TAPE 1, 2	150 mV	100 k $\Omega$	95 dB	A

Measured with rated output power into 8  $\Omega$  loads (both channels driven simultaneously) at 1 kHz.

### Outputs (with rated input):

REC OUT 1, 2	Voltage 150 mV Impedance 10 k $\Omega$
HEADPHONES	Accepts all low or high impedance headphones.
SPEAKER	4 – 16 $\Omega$ speakers are suitable.

**Frequency Response:** PHONO  
 RIAA equalization curve  $\pm 0.5$  dB  
 TAPE 1, 2

10 Hz – 50 kHz  $\begin{matrix} +1 \\ -3 \end{matrix}$  dB

**Tone Controls:** BASS  $\pm 10$  dB at 100 Hz  
 TREBLE  $\pm 10$  dB at 10 kHz

**High Filter:** 6 dB/oct. above 7.5 kHz

**Loudness Control:** +6 dB at 100 Hz  
 (att. 30dB) +3 dB at 10 kHz

**MODEL IDENTIFICATION**

- Print on Rear Panel -

<b>SONY</b> <sup>®</sup>	<b>FM-AM PROGRAM RECEIVER</b>
	MODEL NO. STR-434L
	FREQ. RANGE : FM 87.5 - 108MHz SW 5.8 - 15.8MHz MW 522 - 1602KHz LW 150 - 350KHz
	IF : FM 10.7MHz AM 450KHz
MADE IN JAPAN	
SERIAL NO.	


UK MODEL	AC 240V ~50Hz	380W
AEP MODEL	AC 220V ~50Hz	290W
SCN MODEL		

## - AC Outlet -


SCN model has no ac outlet.

SECTION 1  
OUTLINE

1-1. CIRCUIT DESCRIPTION

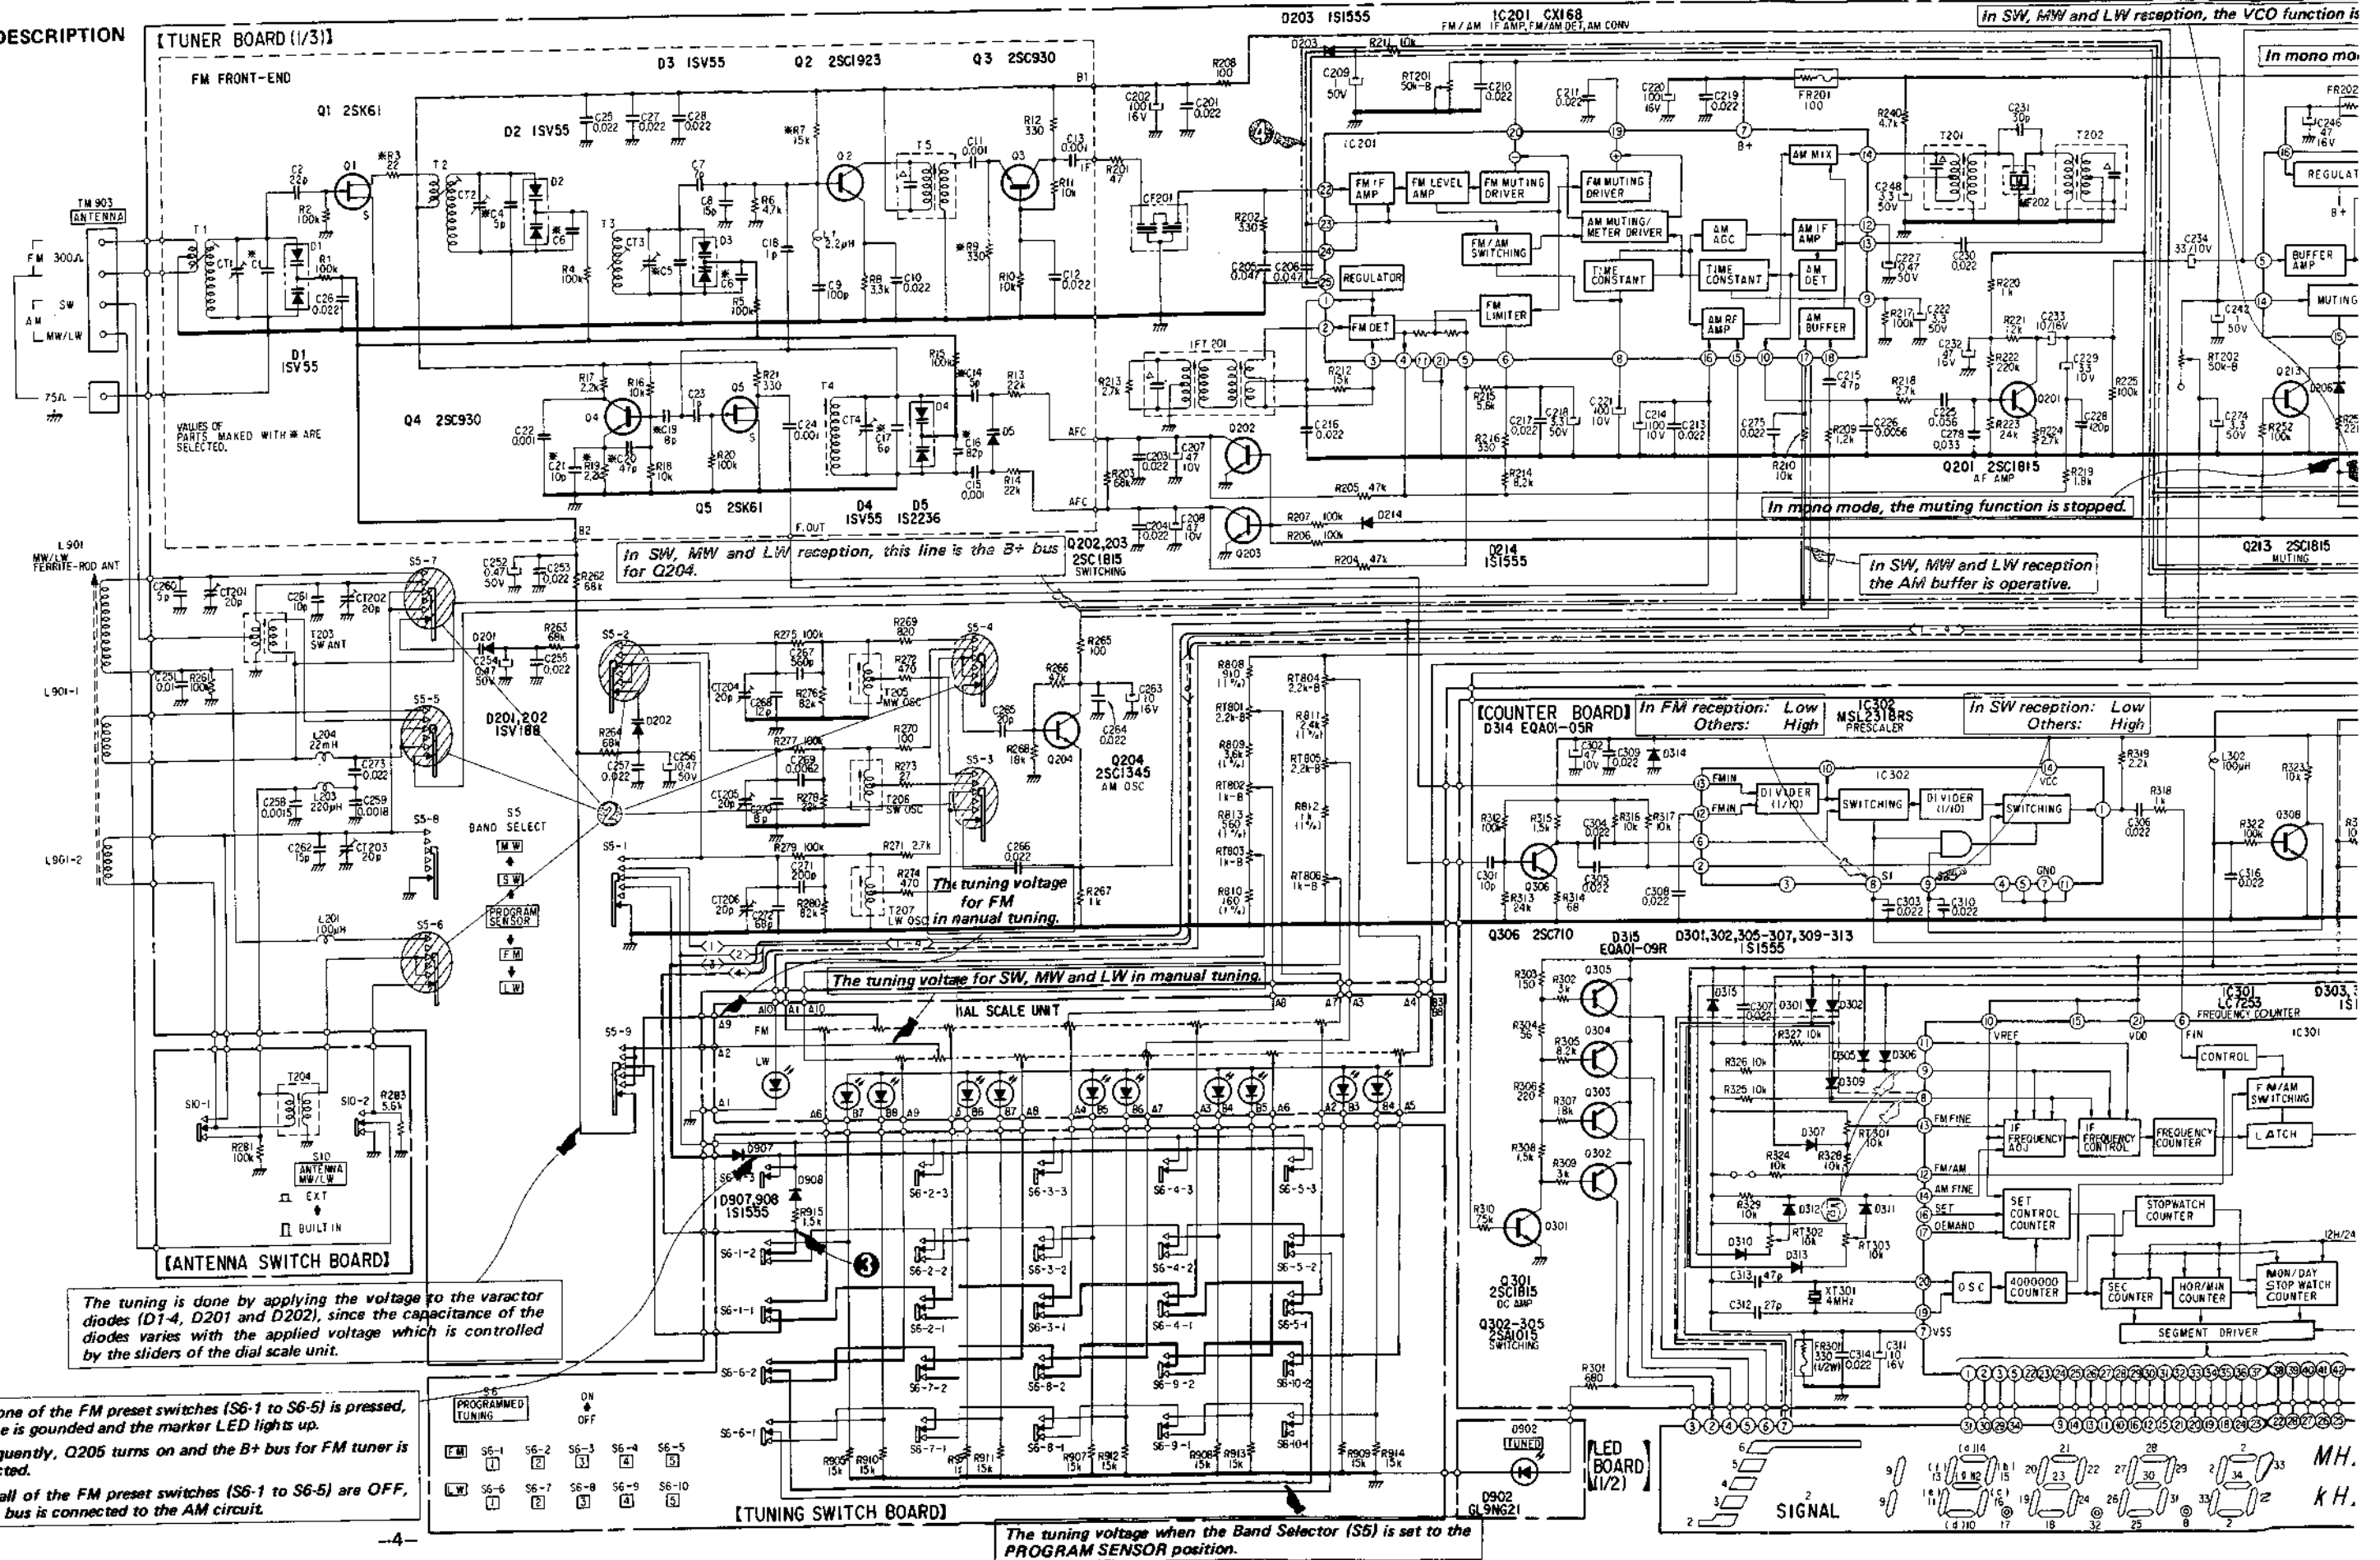

# STR-434L STR-434L

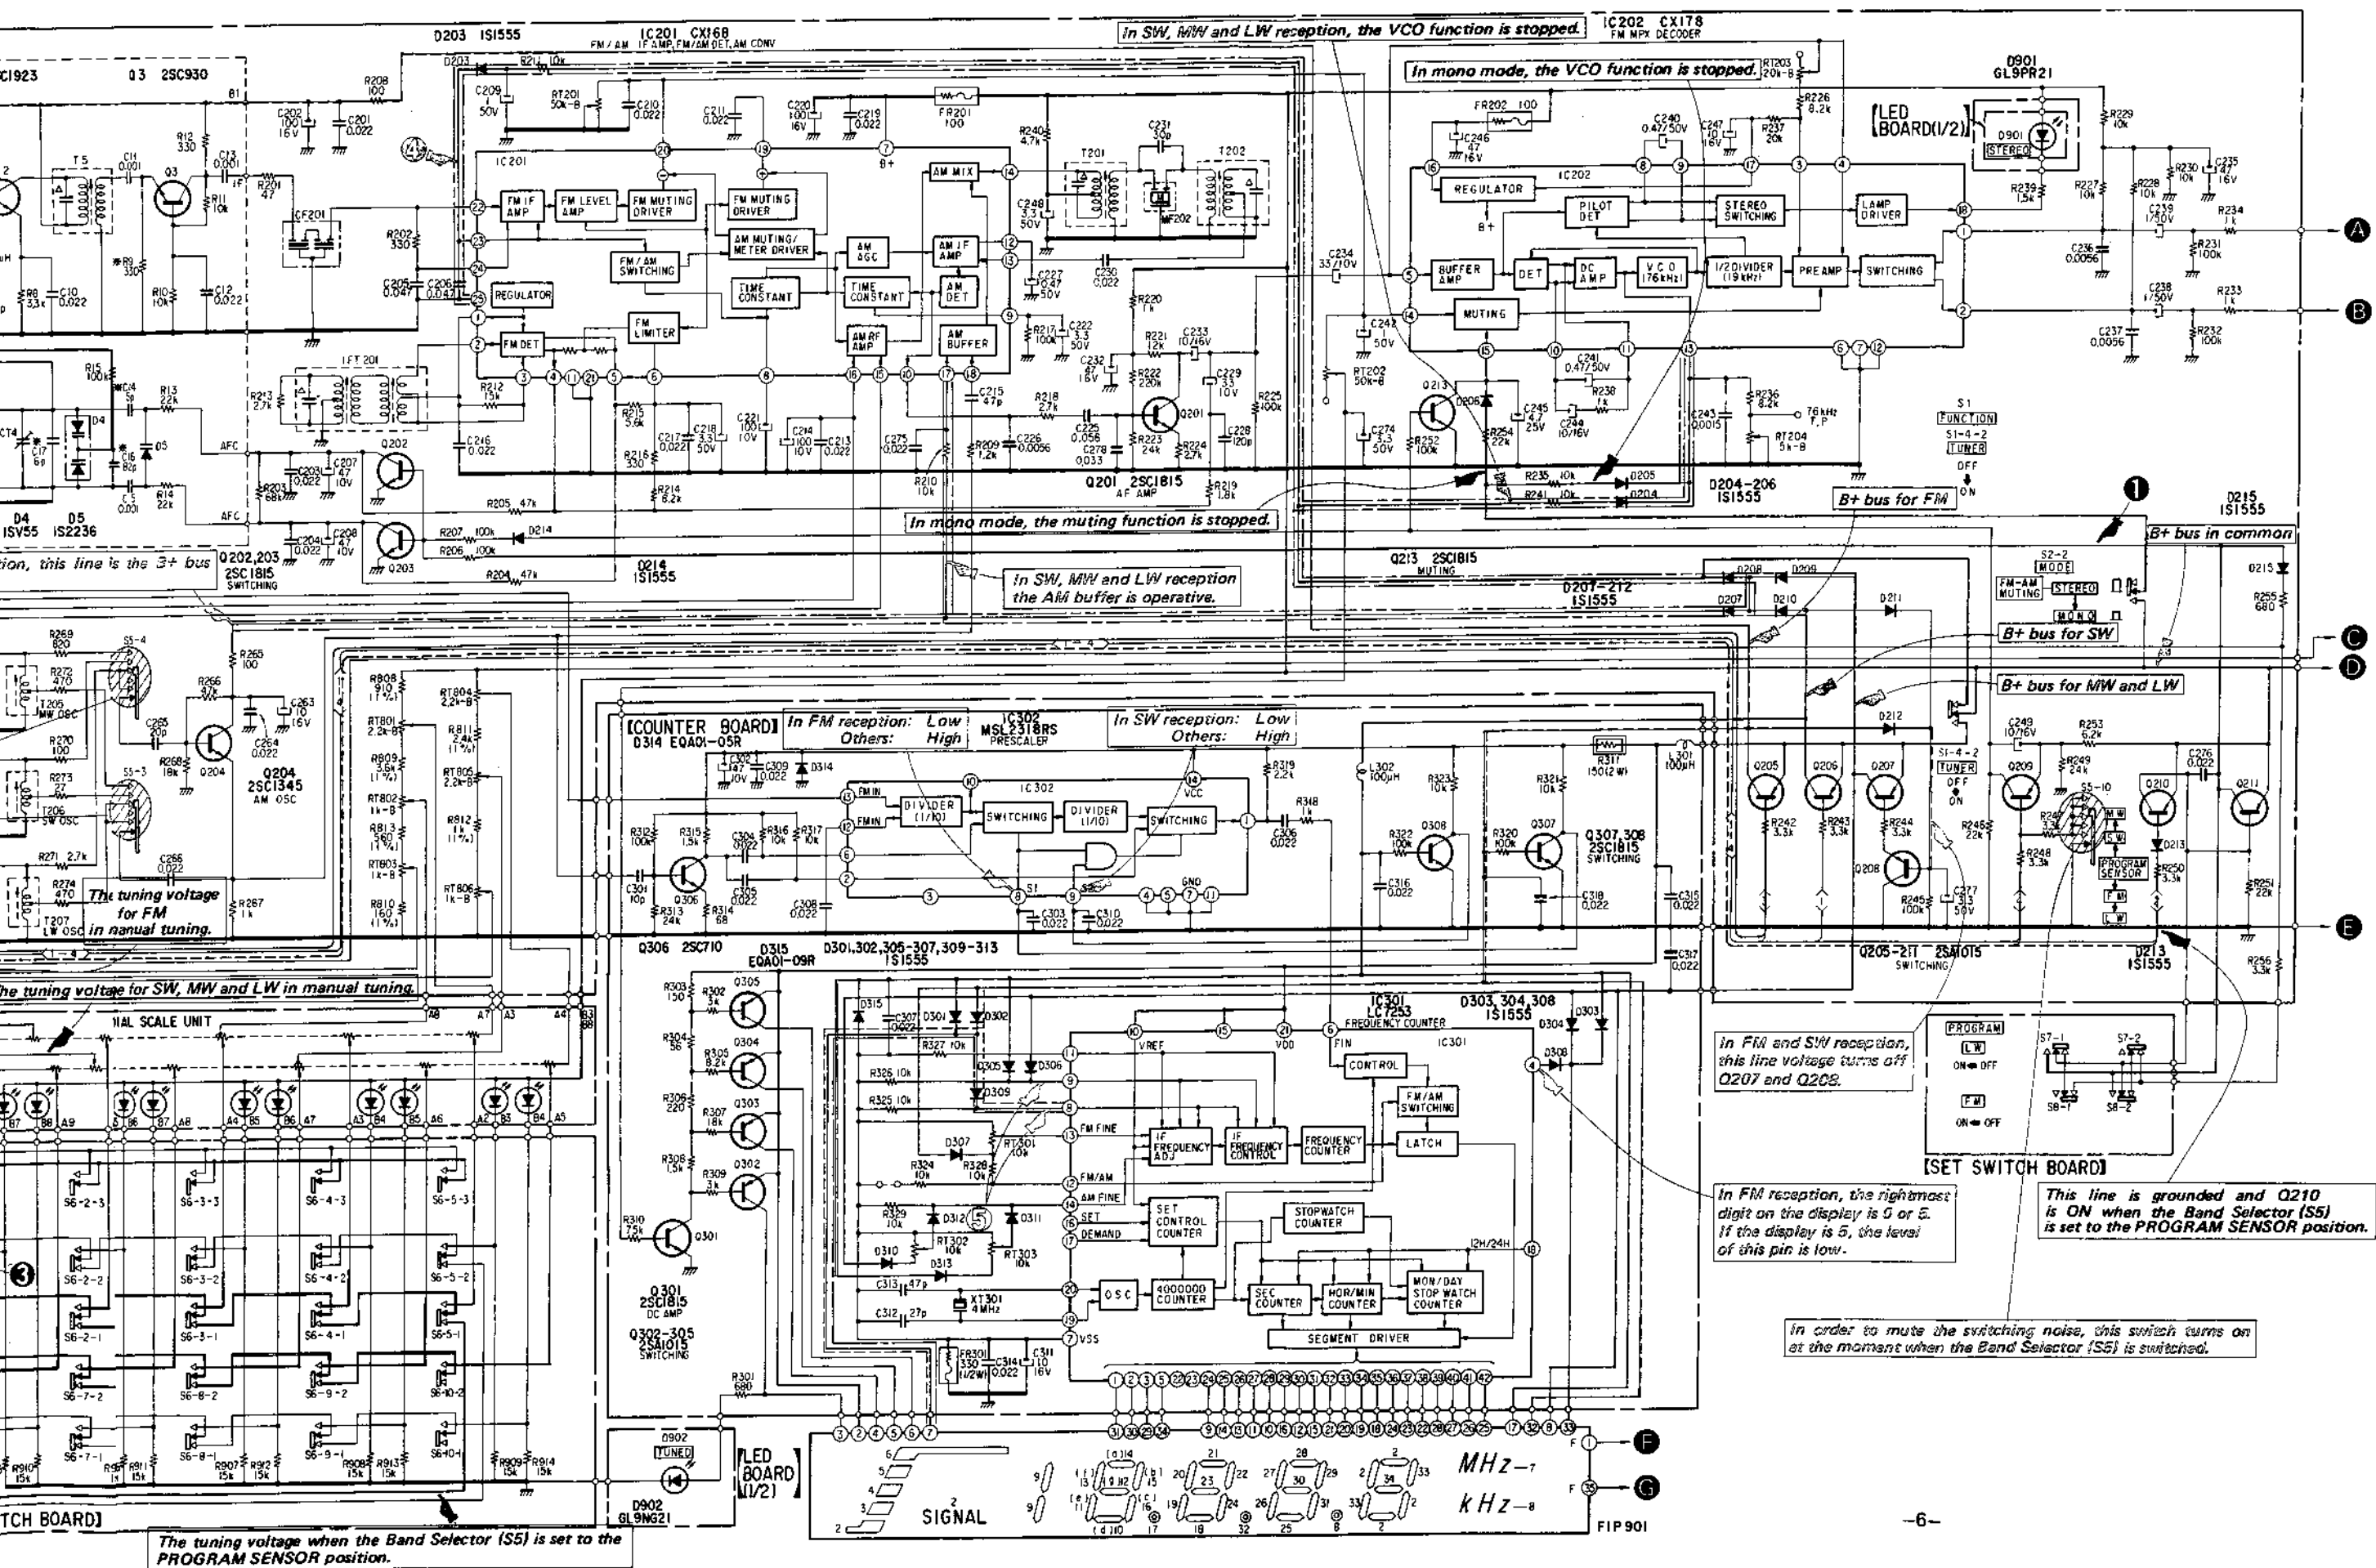

In SW, MW and LW reception, the VCO function is stopped.

In mono mode, the VCO function is stopped.

In mono mode, the muting function is stopped.

In SW, MW and LW reception the AM buffer is operative.

In FM reception: Low Others: High

In SW reception: Low Others: High

In FM and SW reception, this line voltage turns off Q207 and Q208.


In FM reception, the rightmost digit on the display is 5 or 6. If the display is 5, the level of this pin is low.

In order to mute the switching noise, this switch turns on at the moment when the Band Selector (S5) is switched.


The tuning voltage when the Band Selector (S5) is set to the PROGRAM SENSOR position.

- 1 While keeping the FM PROGRAM button depressed, the voltage supplied to this line turns Q203 and Q202 on, and suspends the AFC function.
- 2 When the Band Selector (S5) is set to the PROGRAM SENSOR position, a selection of LW or FM mode is done by connecting the B+ bus to the respective circuit.
- 3 When one of the preset switches (S6-1 to S6-10) is pressed, this line level becomes high so that Q209 turns off and the muting circuit is cut off. When all of the preset switches are OFF, Q209 is ON and the muting circuit is active since this line is grounded via R915 and D908.
- 4 In SW, MW and LW reception, the CX168 function is switched to AM mode.
- 5 The counter function is switched by this line voltage, depending on the IF frequency either FM IF freq. or AM IF freq.

1-2. BLOCK DIAGRAM









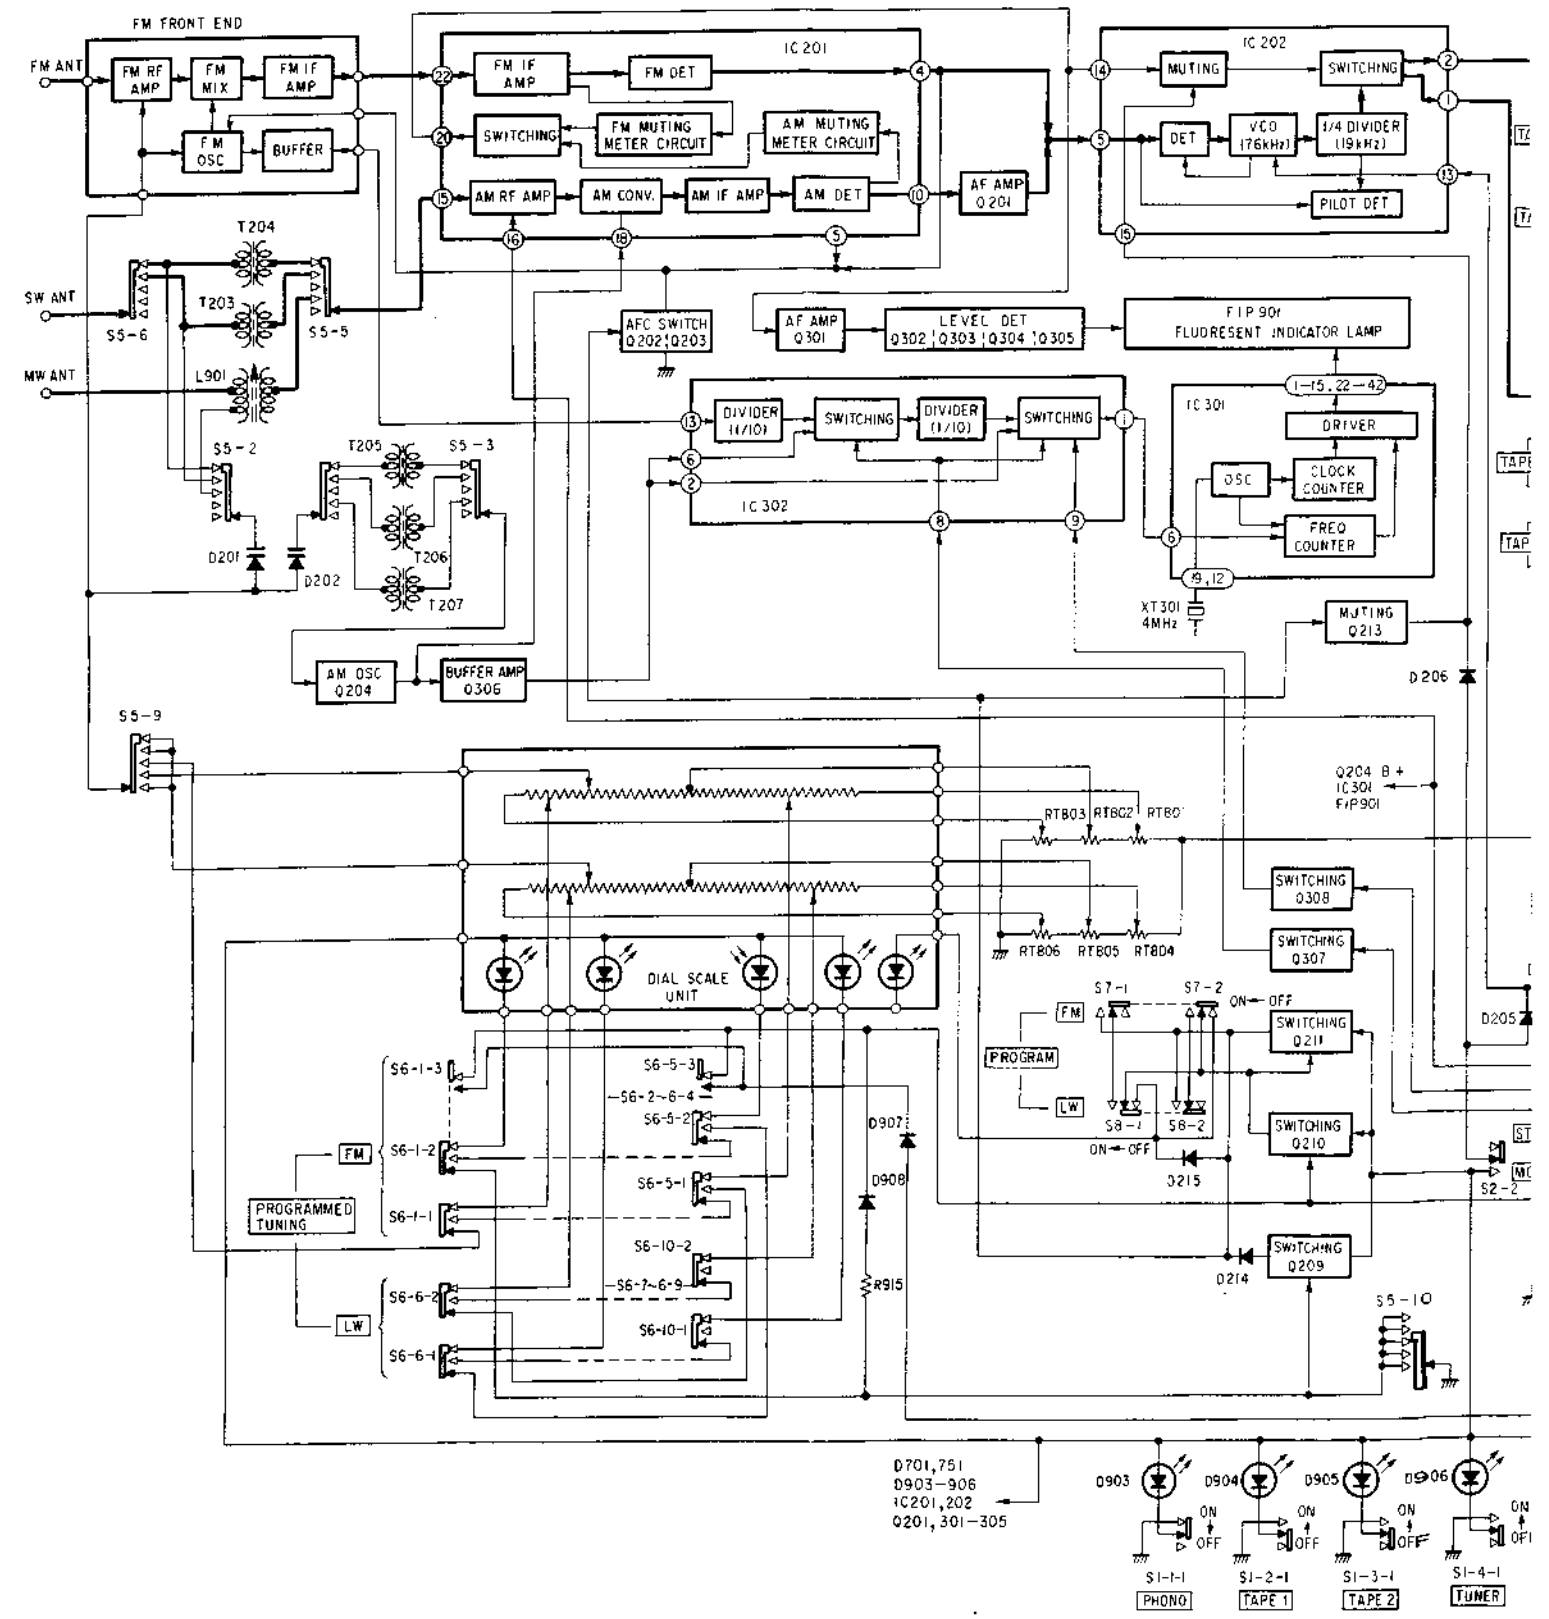


1-2. BLOCK DIAGRAM









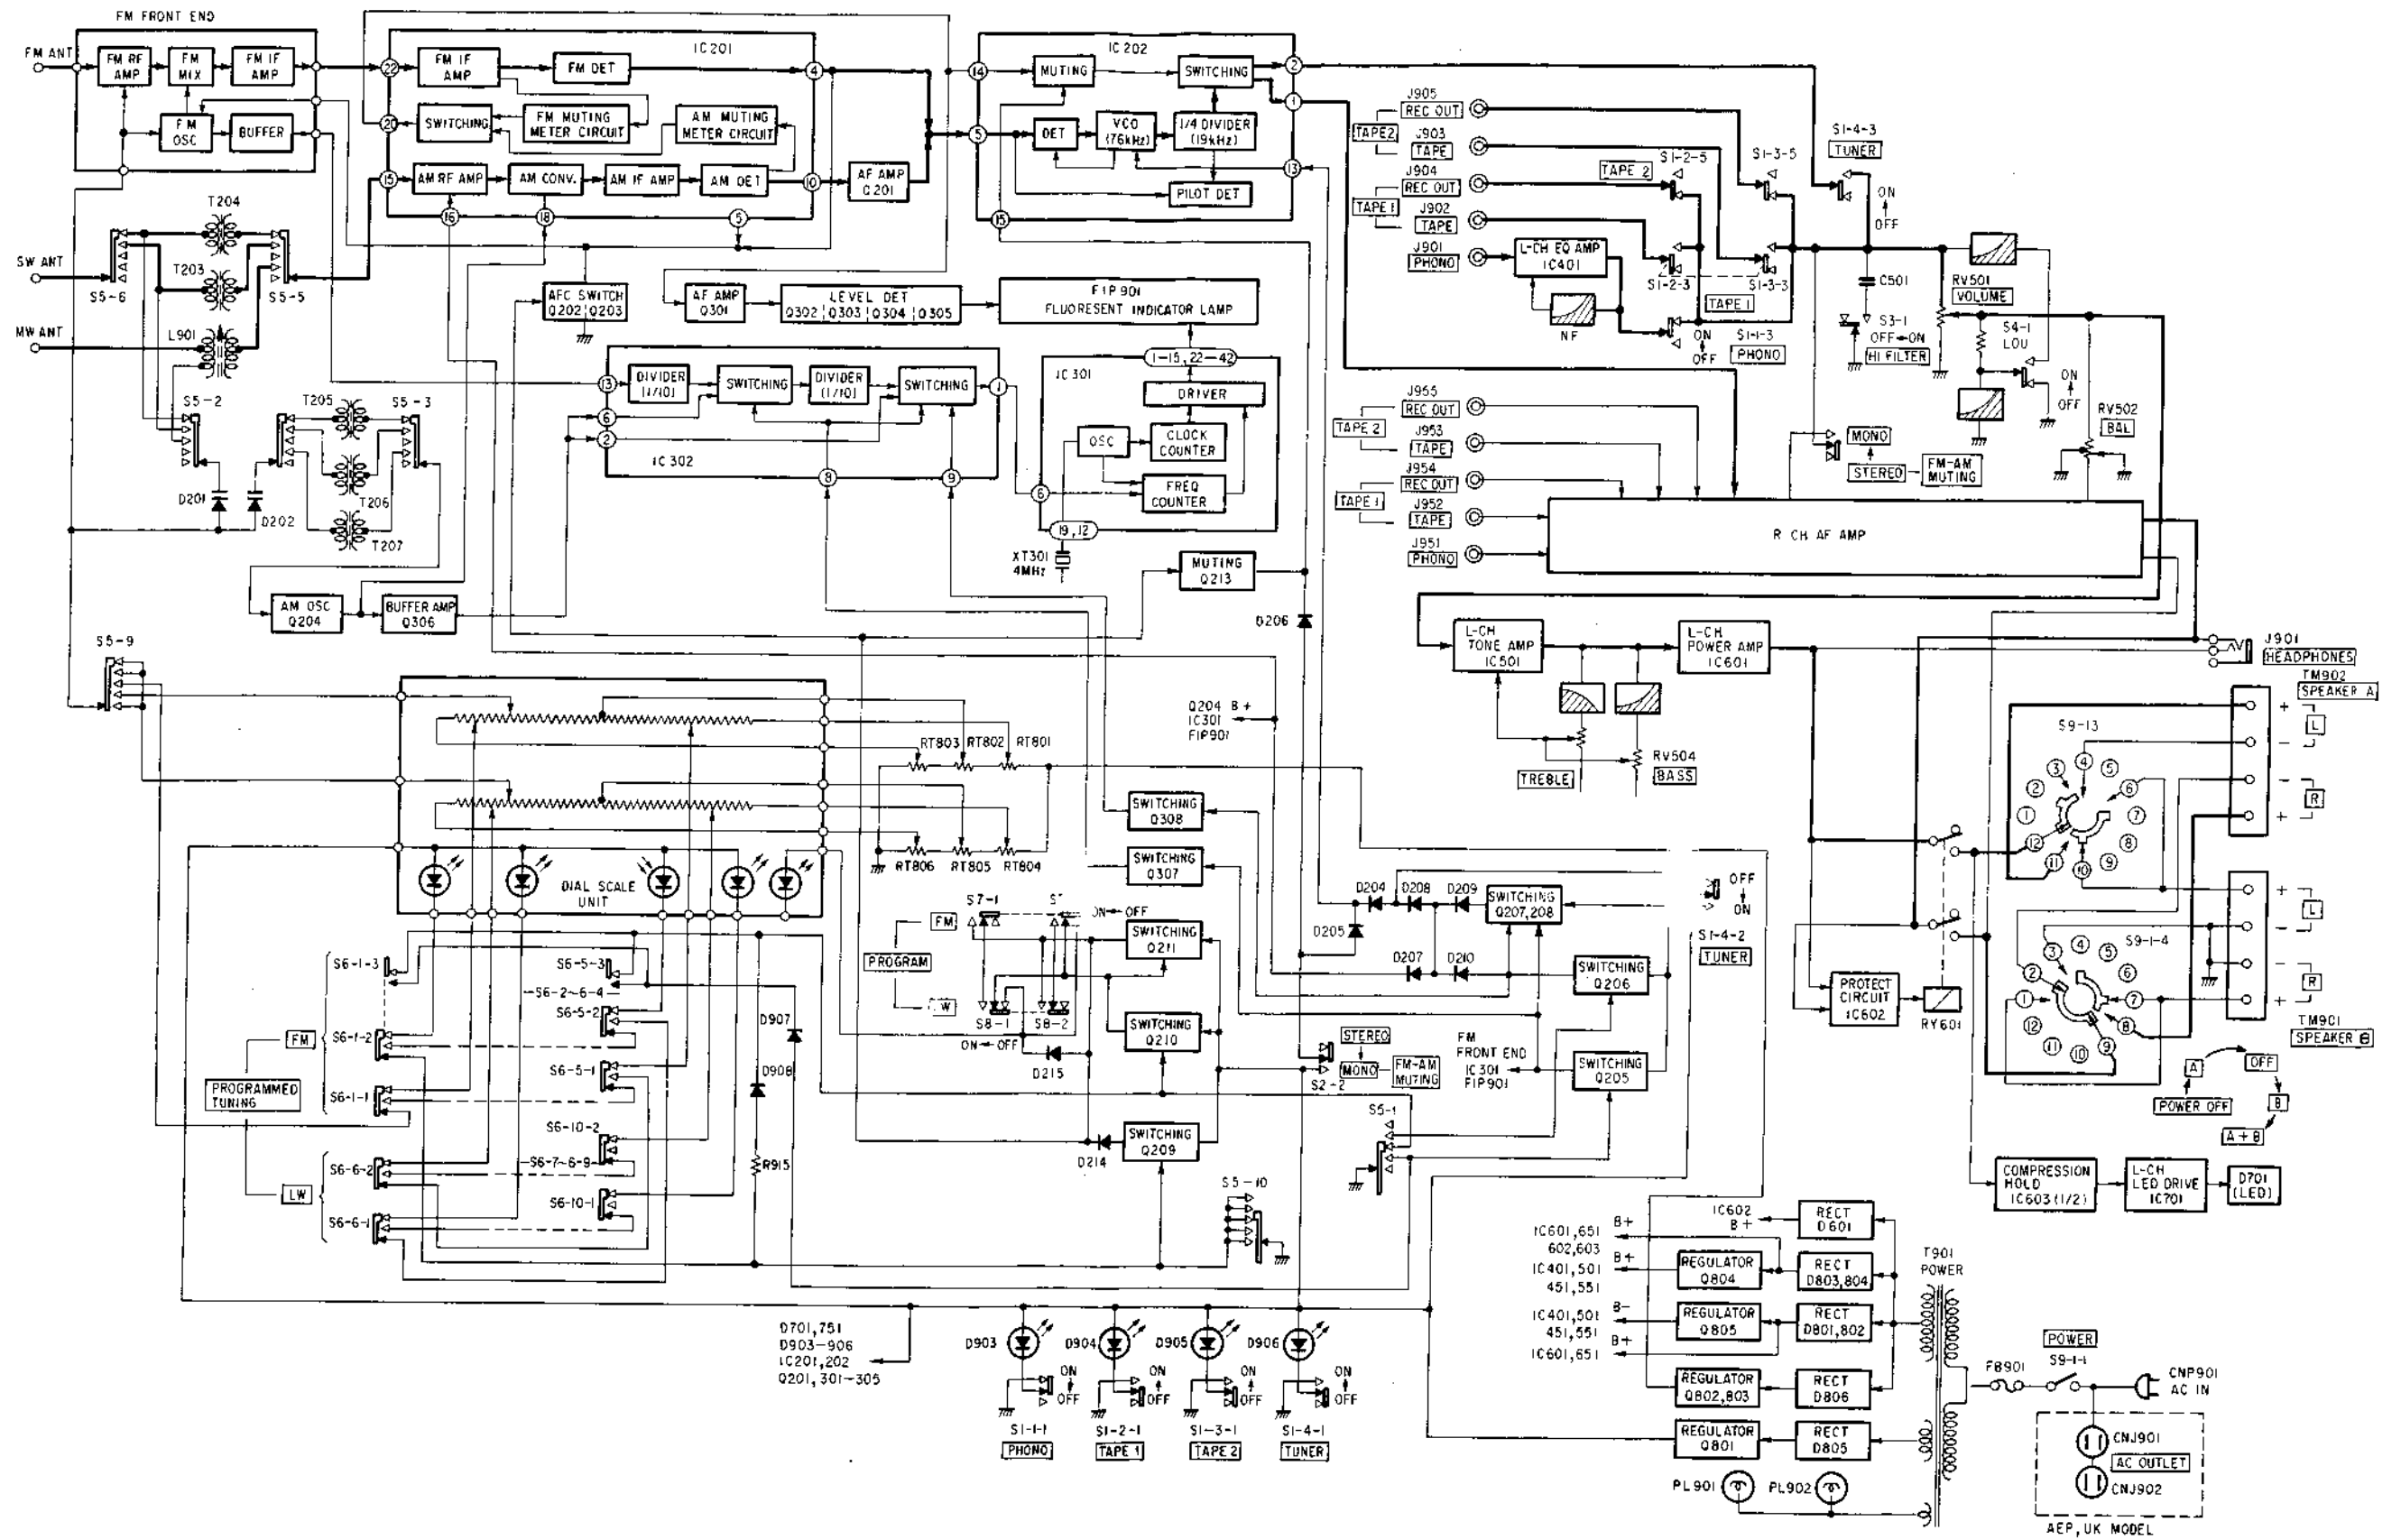





SECTION 2  
DISASSEMBLY

• Follow the disassembly procedure in the numerical order given.

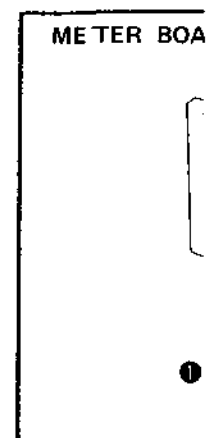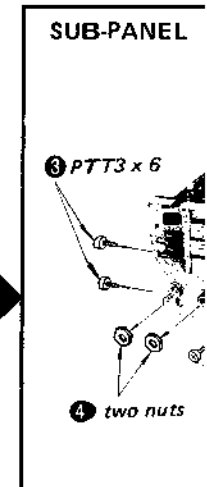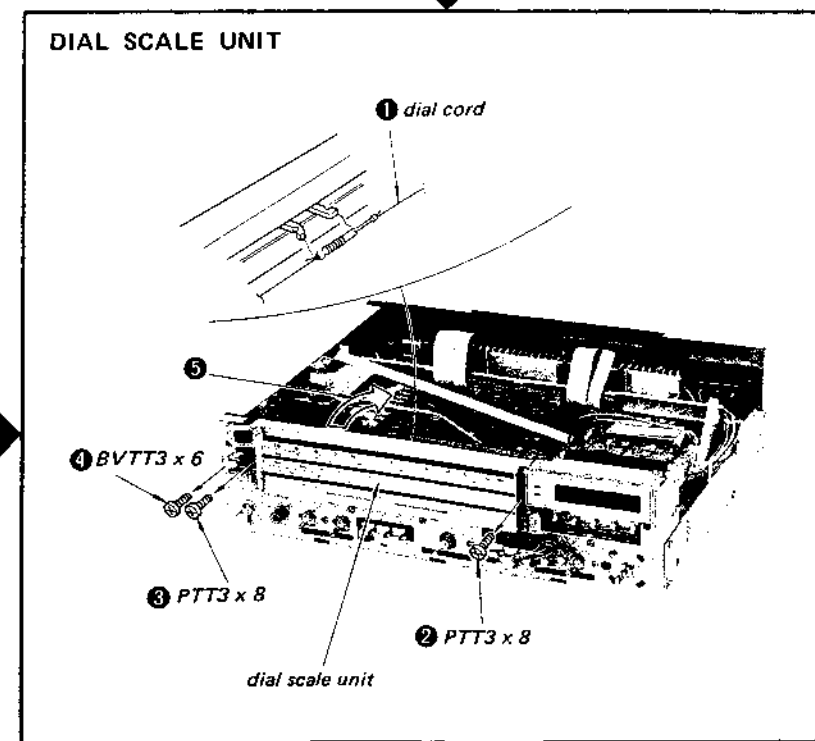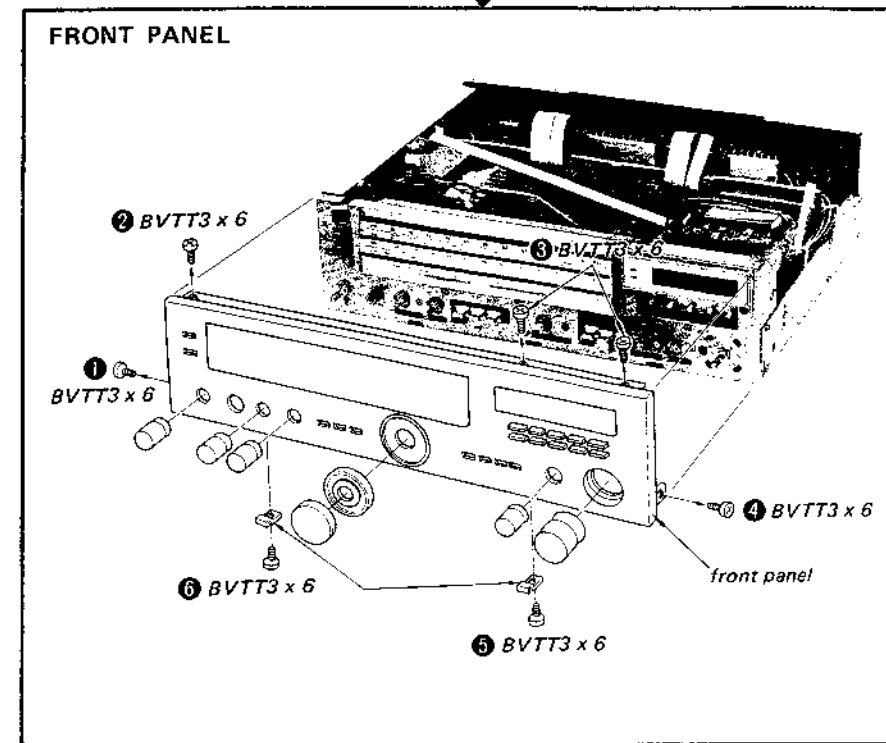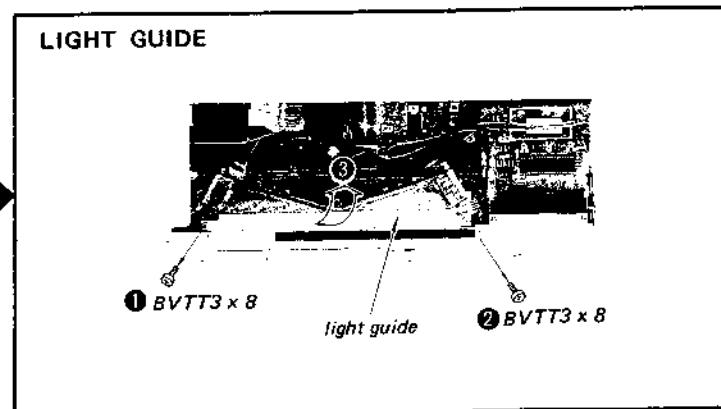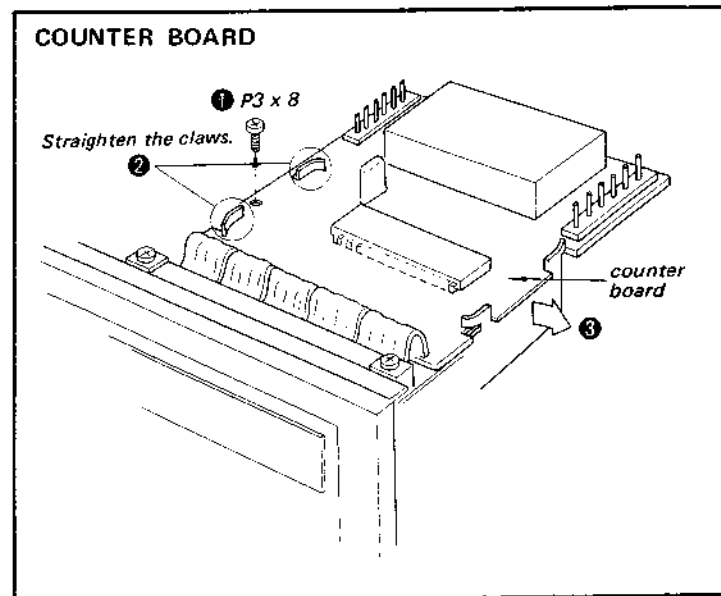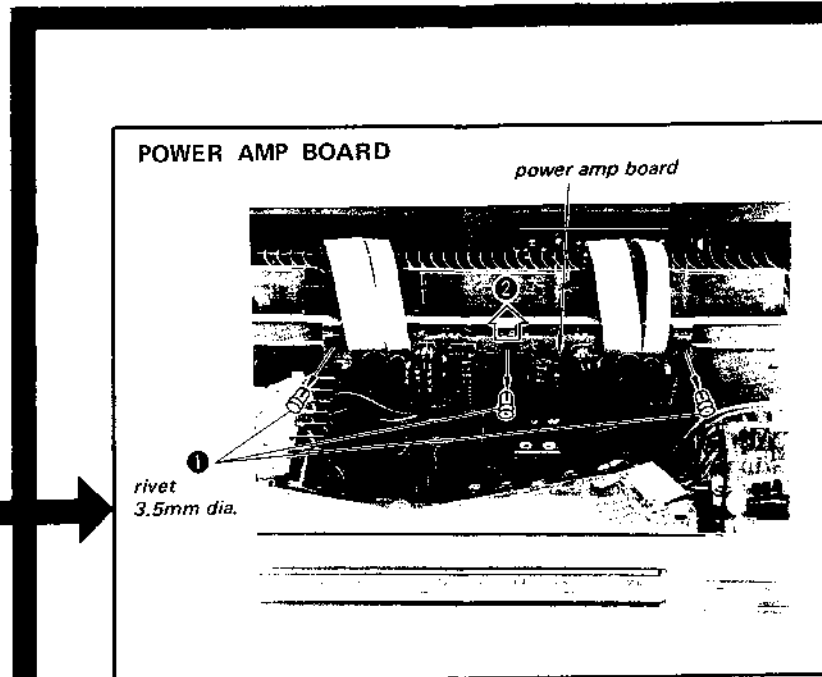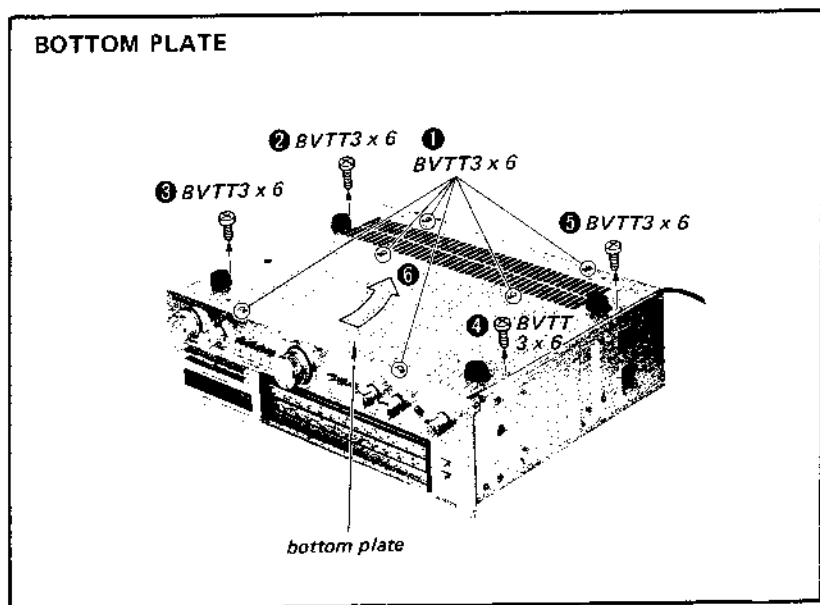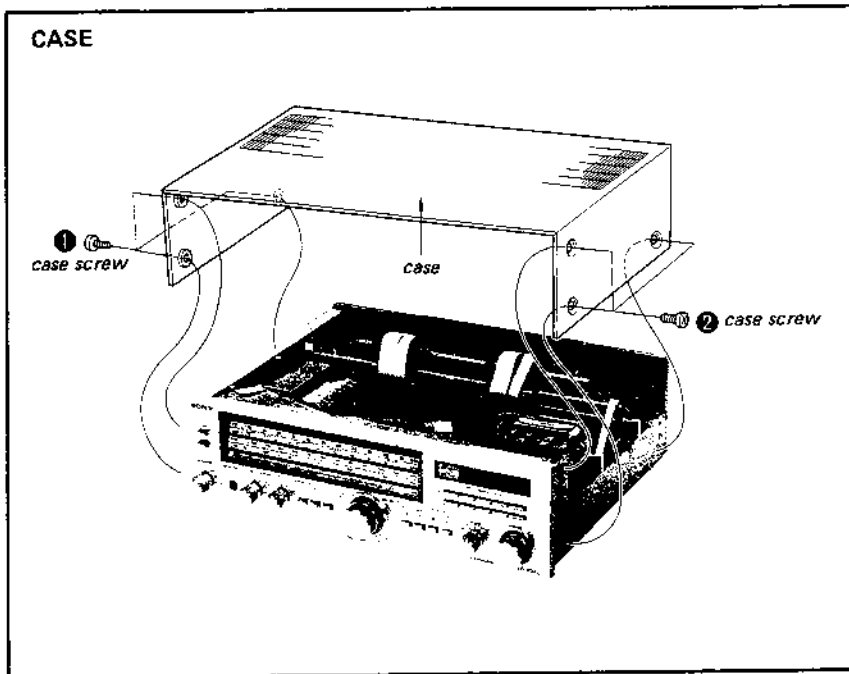



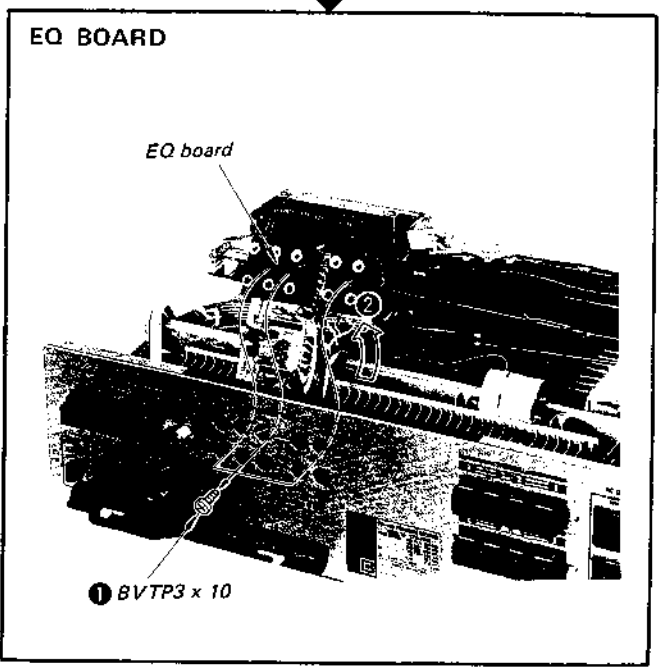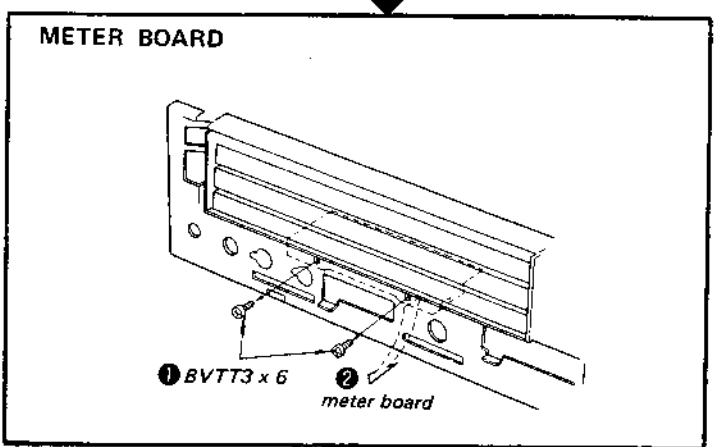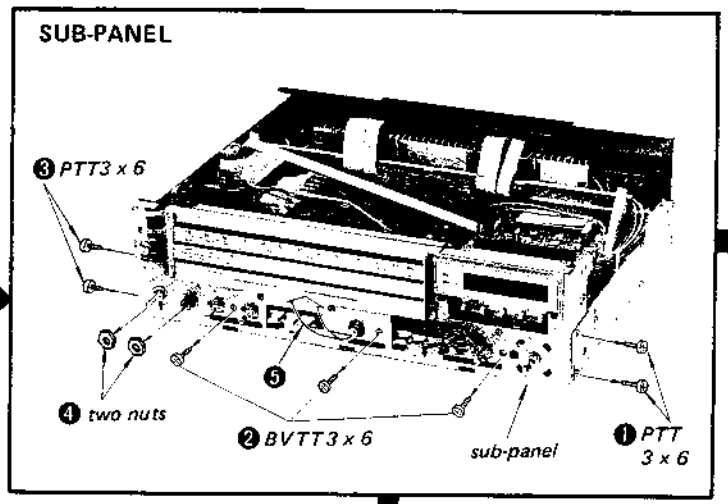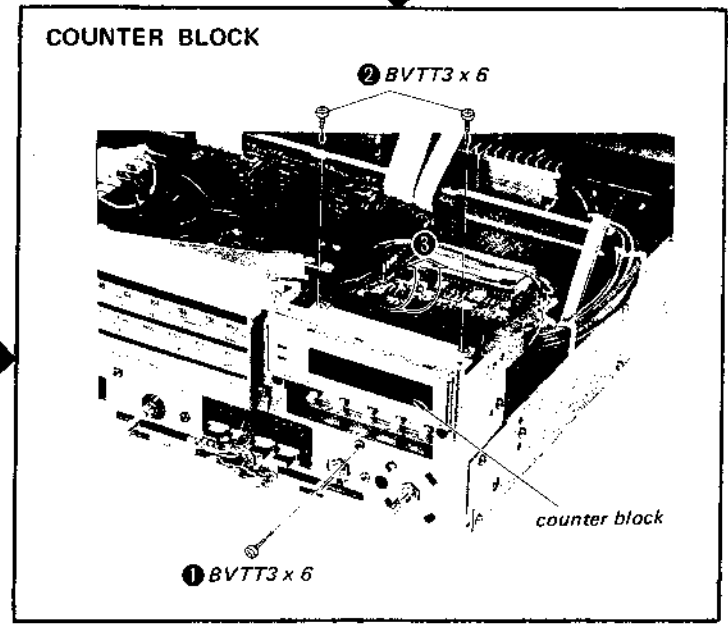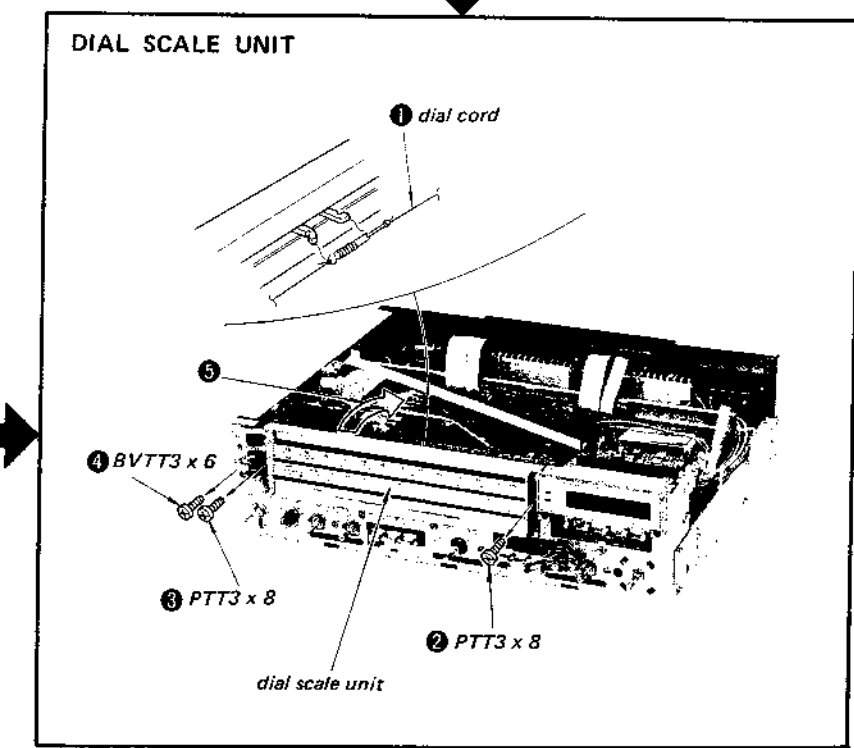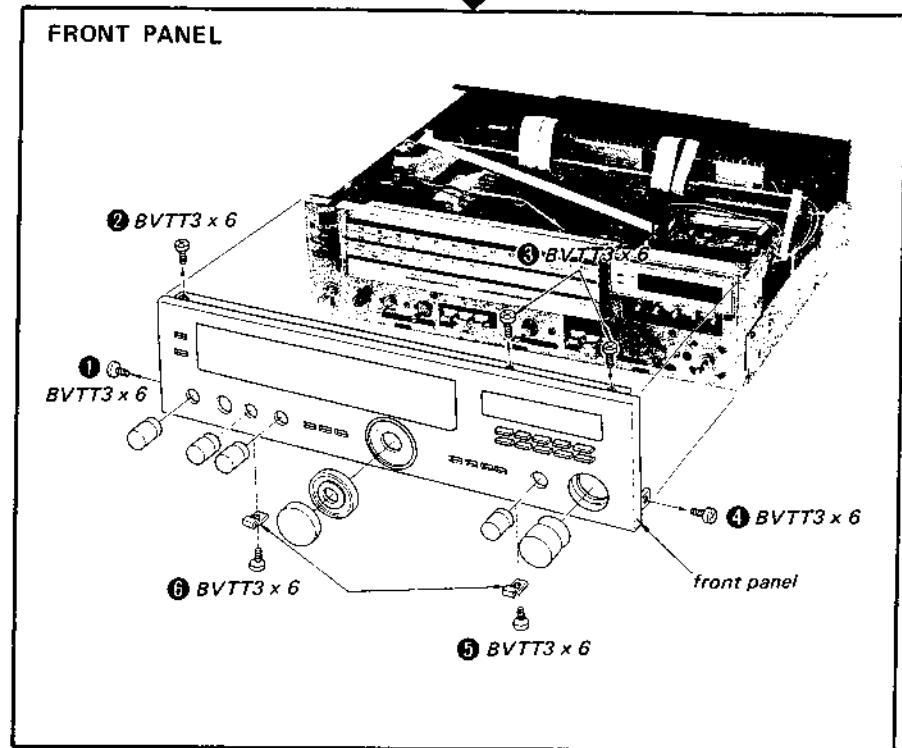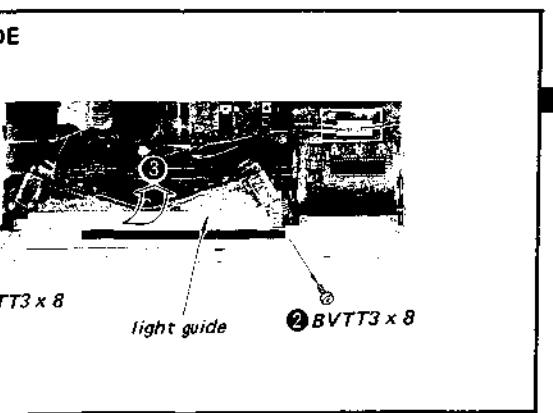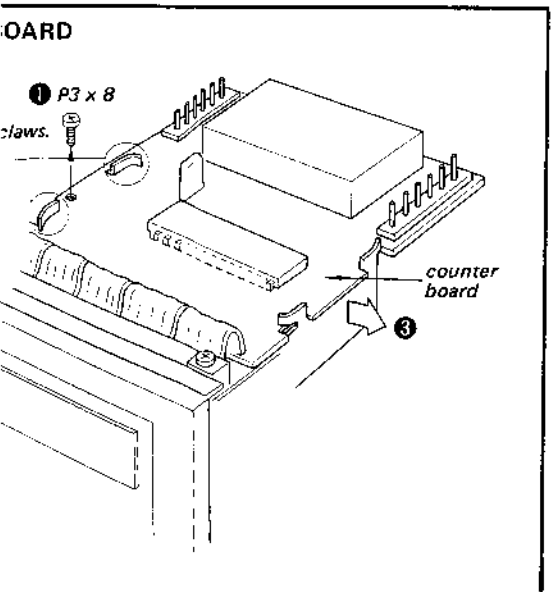
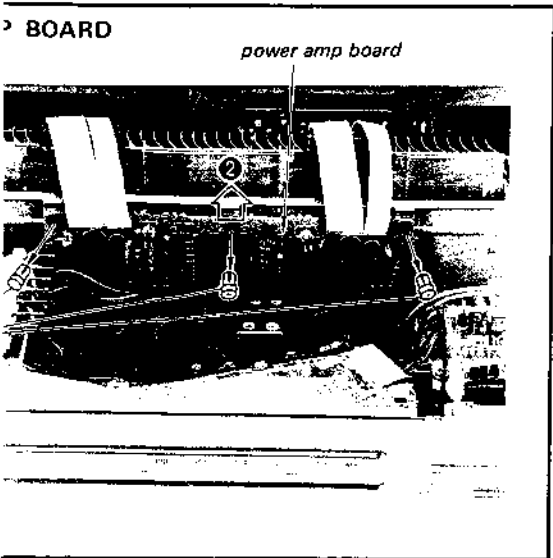


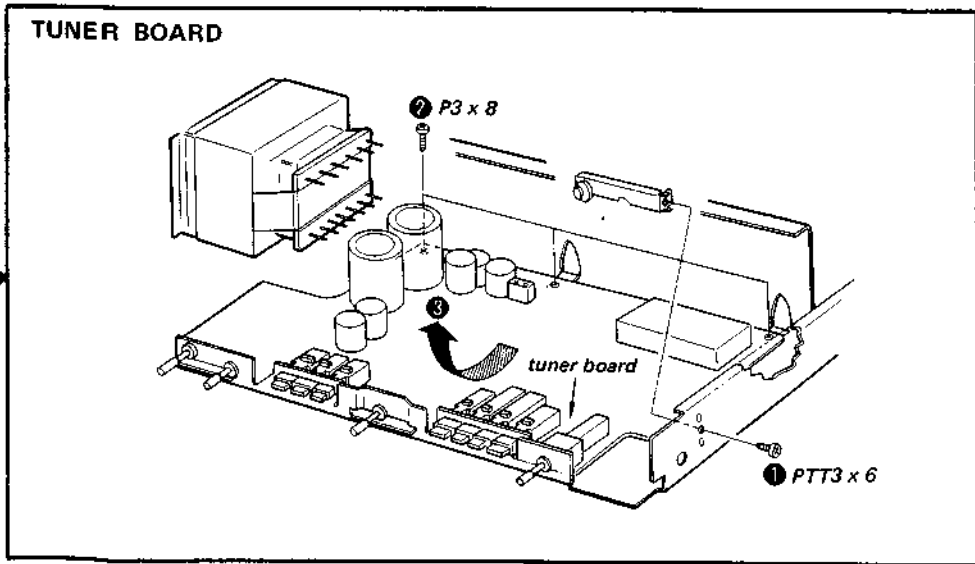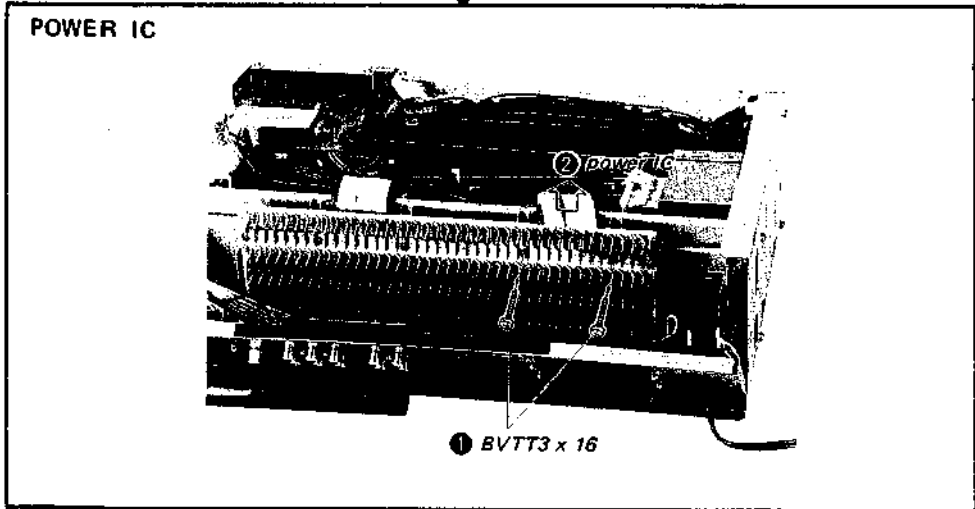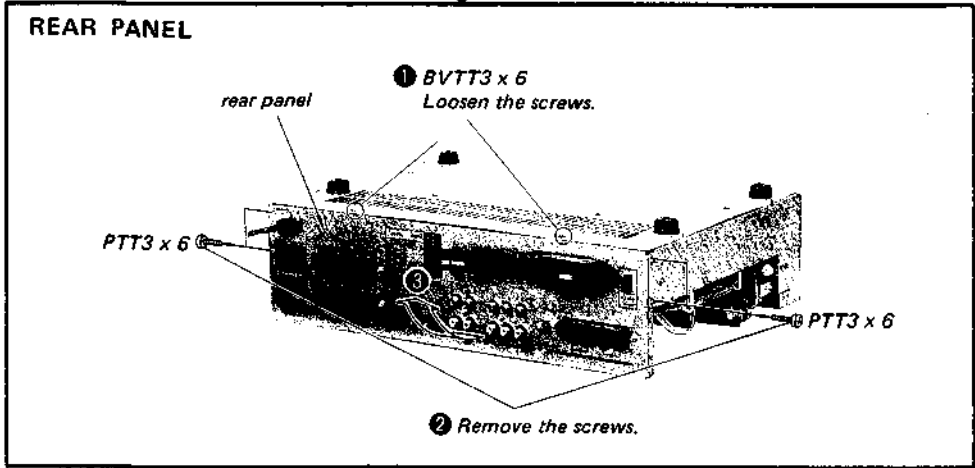


**DIAL SCALE UNIT**

This unit is tuned by moving the sliders of the dial scale unit along the carbon-coated lines of the resistor plates. The sliders should be moved very precisely. So, carefully perform the disassembly and the installation of the dial scale unit as follows. Only the marker and the pointer table are replaceable.


Take care not to damage the sliders shown below.

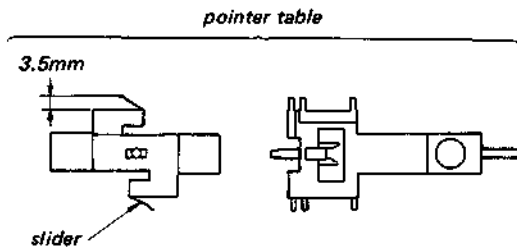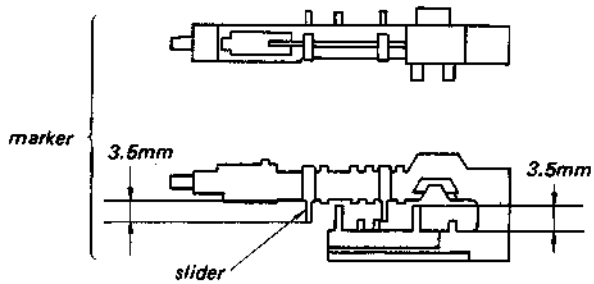


• **Dial Scale Unit Disassembly**

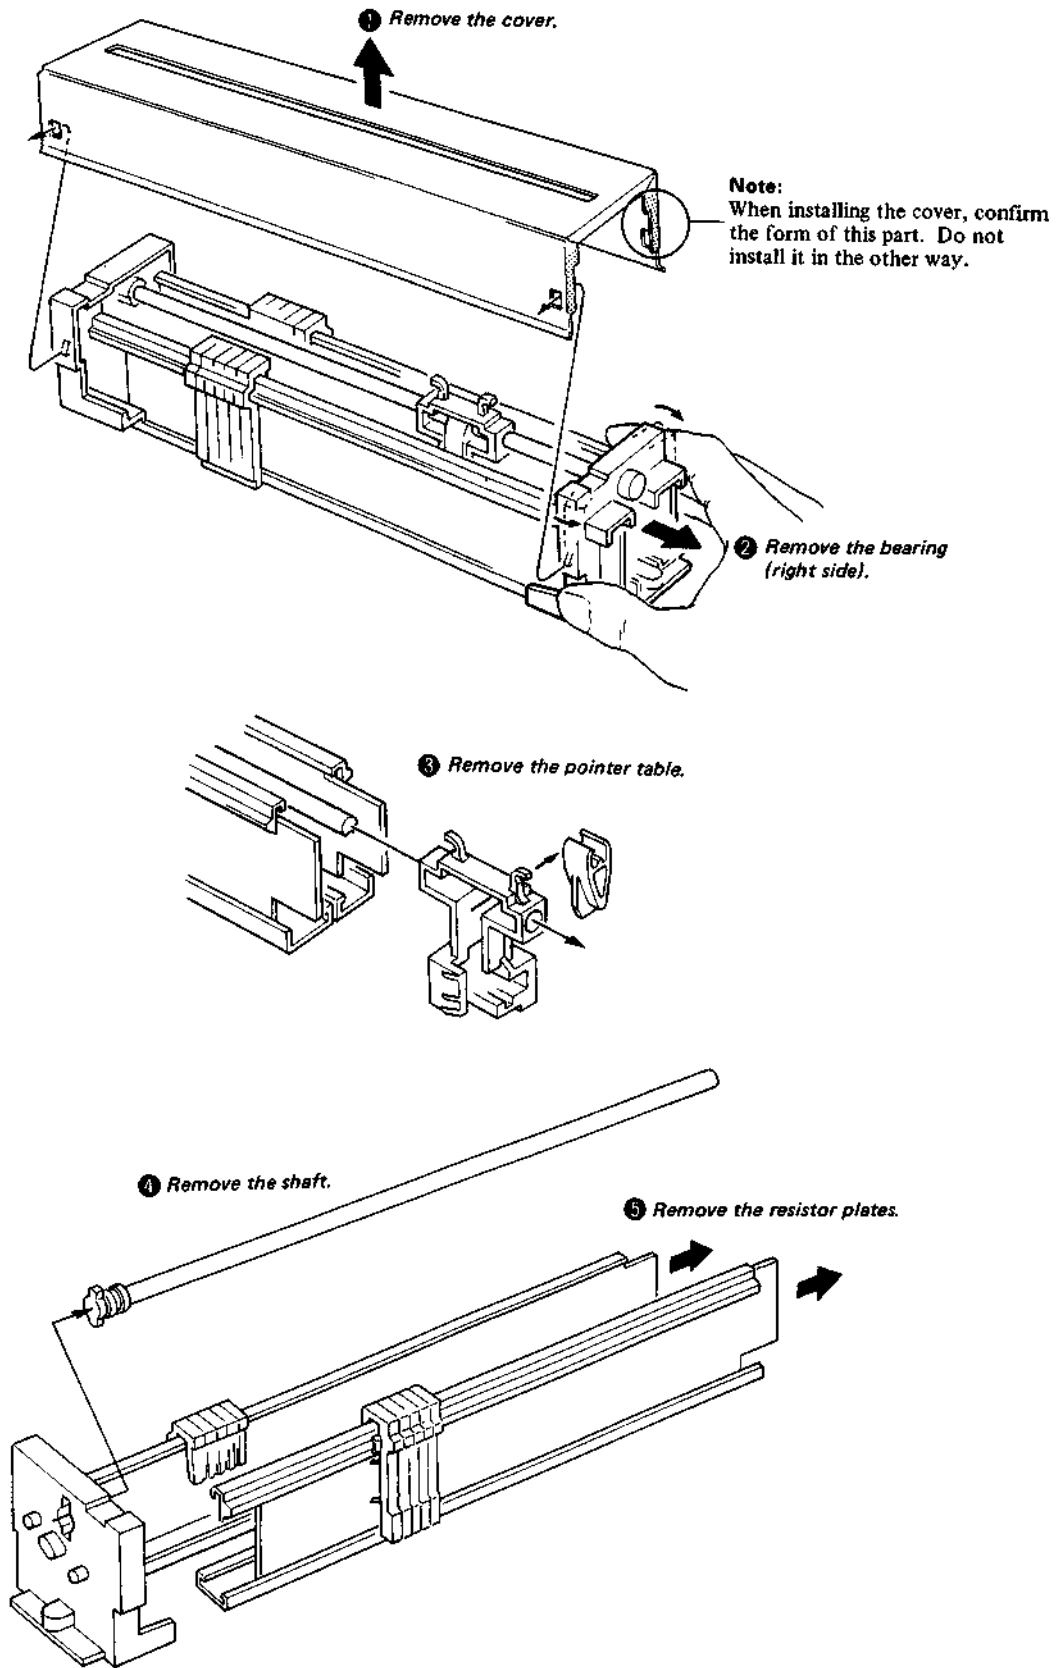

## • Dial Scale Unit Installation

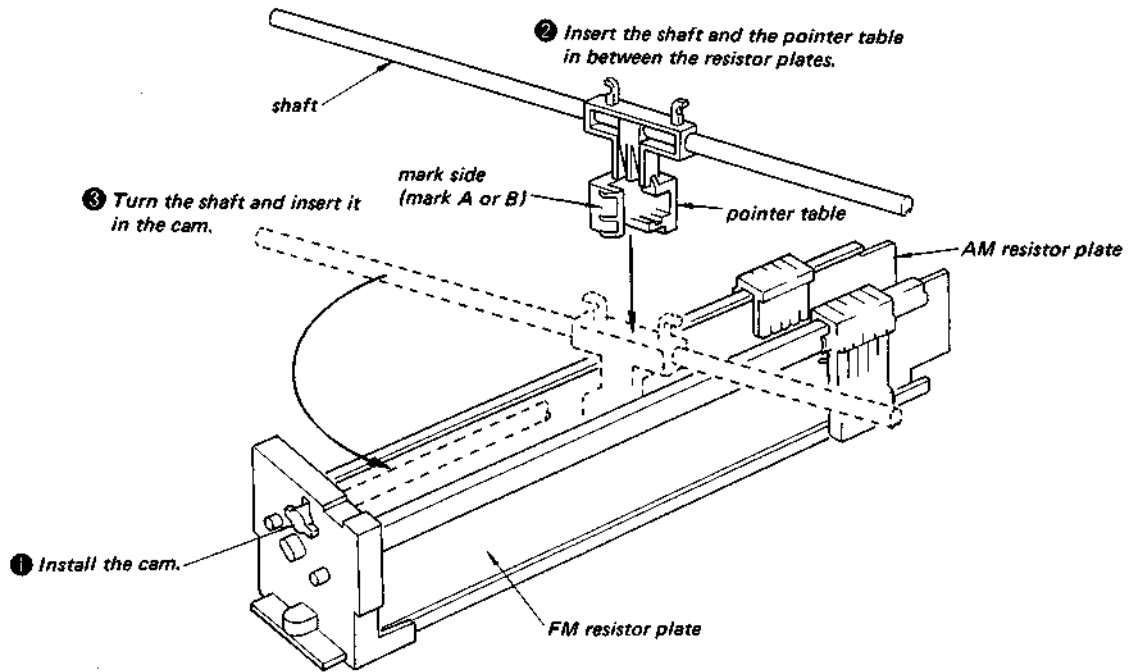

**Note:**  
The installation is performed in this way not to damage the sliders of the pointer table.



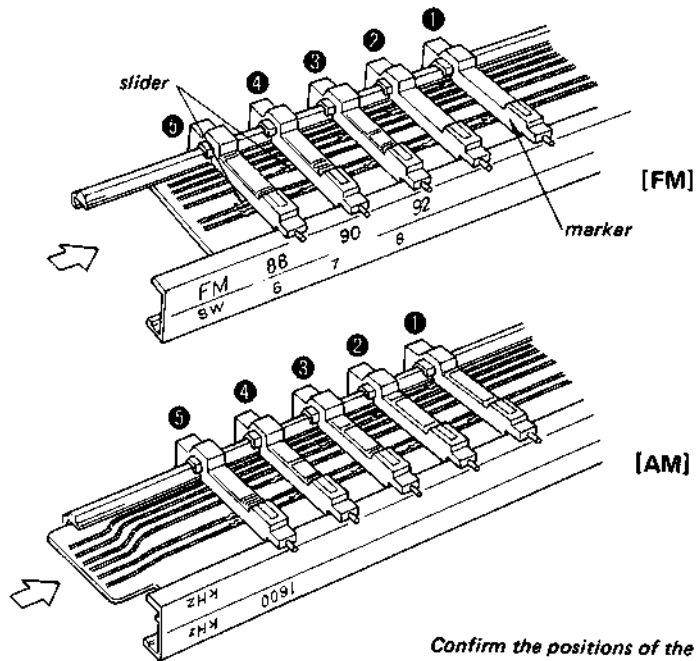


Confirm the positions of the sliders and install the markers in the numerical order given. If one of the markers is damaged, replace the five markers together to obtain the same brightness of them.

**DIAL CORD STRINGING**

**Note:**



Before the dial cord stringing, remove the counter board referring to the pages 10 and 11.

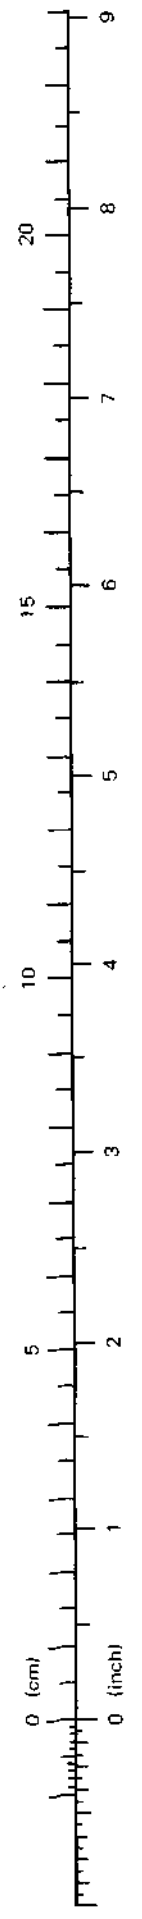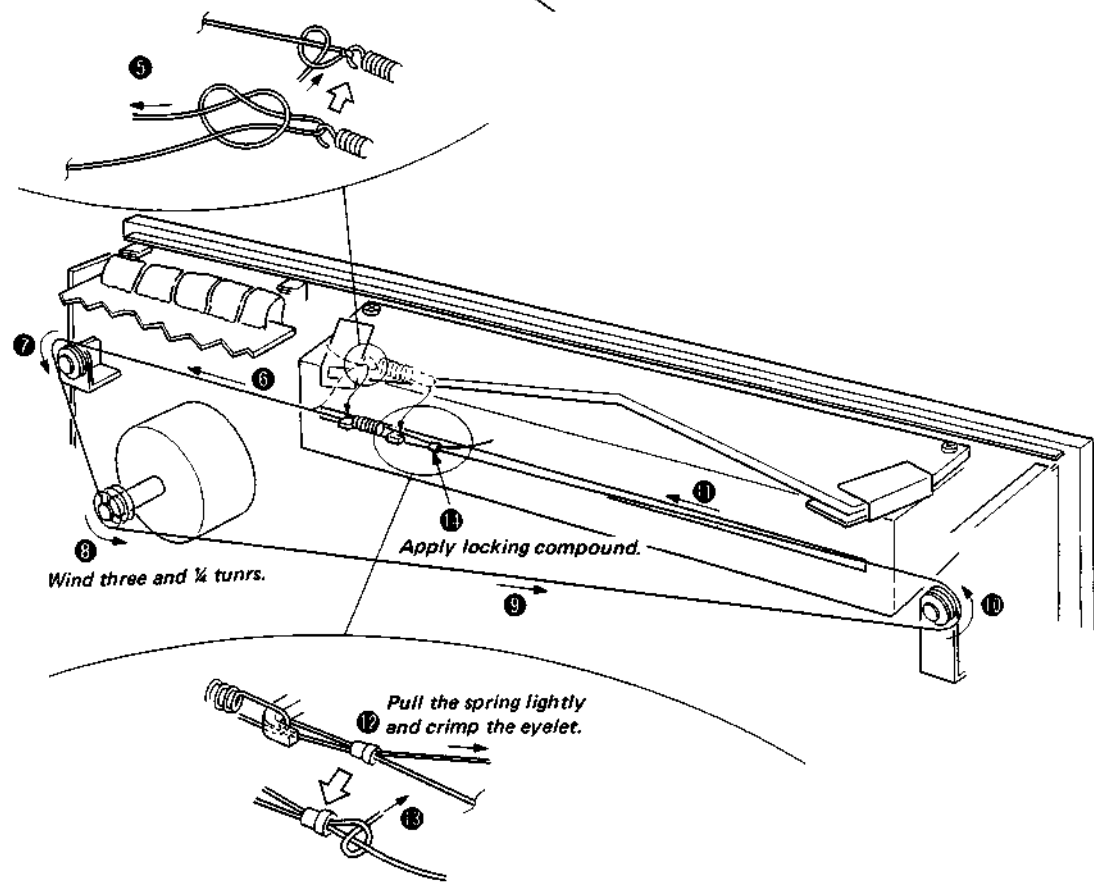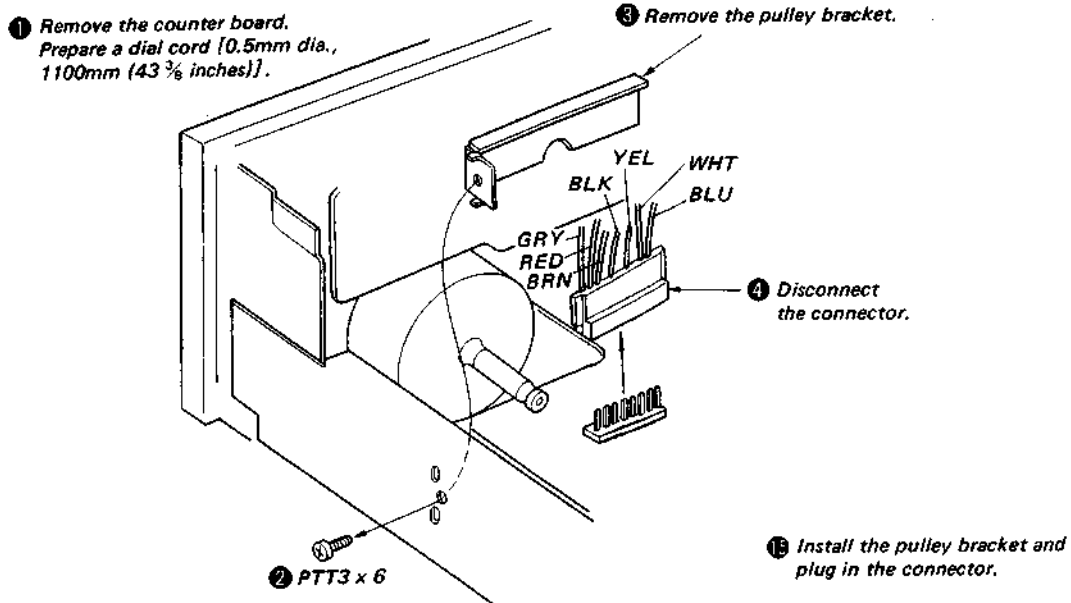

SECTION 3  
ADJUSTMENTS


3-1. AM SECTION

Setting: FUNCTION switch: TUNER  
 Band Selector switch: MW  
 ANTENNA switch: BUILT IN

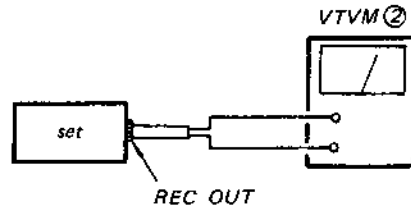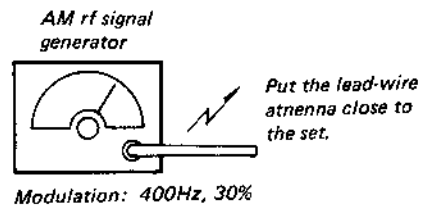


- Repeat the procedures in each adjustment several times, and the frequency coverage and tracking adjustments should be finally done by the trimmer capacitors.

AM IF ALIGNMENT	
Adjust for a maximum reading on VTVM ②.	
450kHz	
T202	T201

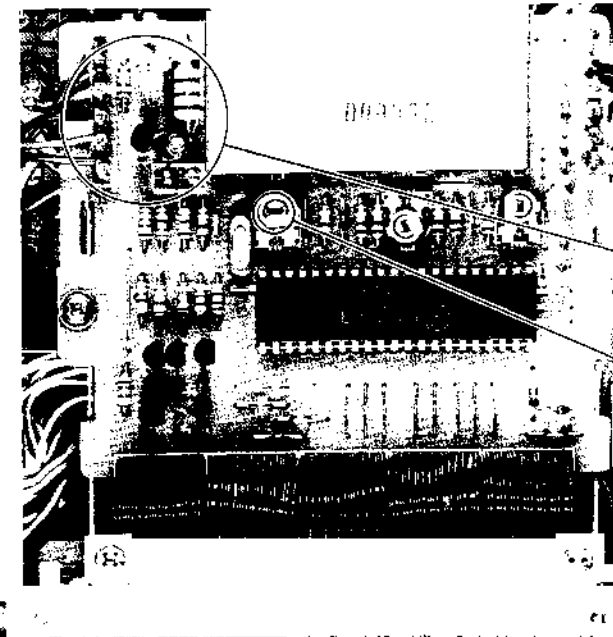

MW FREQUENCY INDICATION ADJUSTMENT  
 Setting: AM Rf Signal Generator: 1000 kHz  
 Procedure:

- Set the Band Selector switch to the MW position and connect a 10kΩ carbon resistor as shown below.

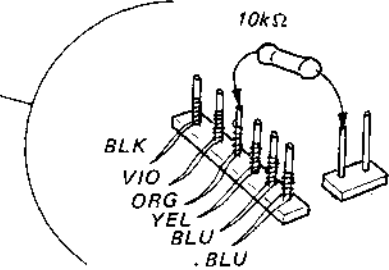





- Tune the unit to the 1000.0kHz signal precisely and adjust RT302 so that the rightmost digit on the display stops flickering.

MW FREQUENCY COVERAGE ADJUSTMENT			
Tuning Control Voltage Adjustment	Dial Indication	VTVM ① Reading	Adjustment Part
	maximum frequency	25V	RT804
	minimum frequency	2V	RT806
Adjust for a specified reading on VTVM ①.			

Local Oscillator Frequency Adjustment	Dial Indication	AM Rf Signal Generator Frequency	Adjustment Part
	minimum frequency	515kHz	T205
	maximum frequency	1660kHz	CT204
Adjust for a maximum reading on VTVM ②.			

Dial Pointer Setting	Dial Indication	AM Rf Signal Generator Frequency	Adjustment Part
	600kHz	600kHz	RT804
	1000kHz	1000kHz	RT805
	1400kHz	1400kHz	RT806
Adjust for a maximum reading on VTVM ②.			

Note:  
 Be sure to perform the LW and the SW frequency coverage adjustments after the tuning control voltage adjustment.

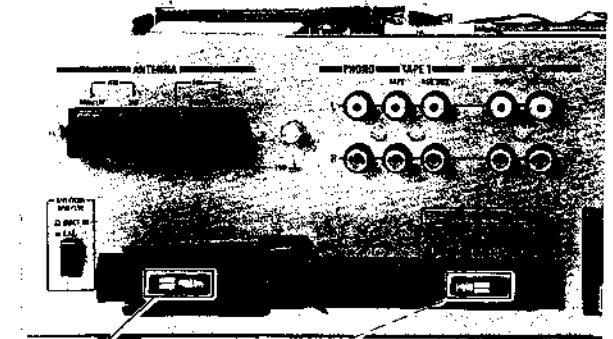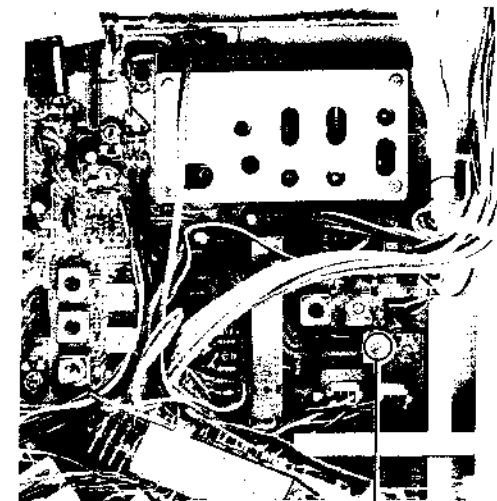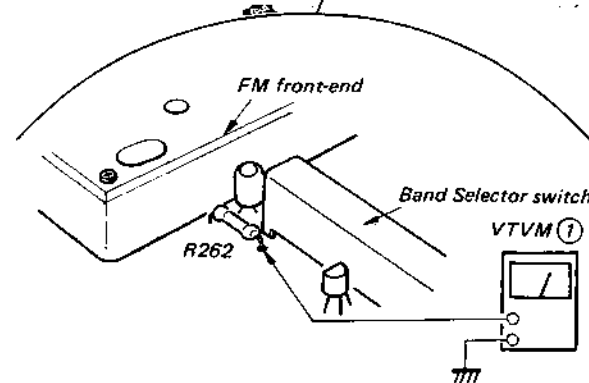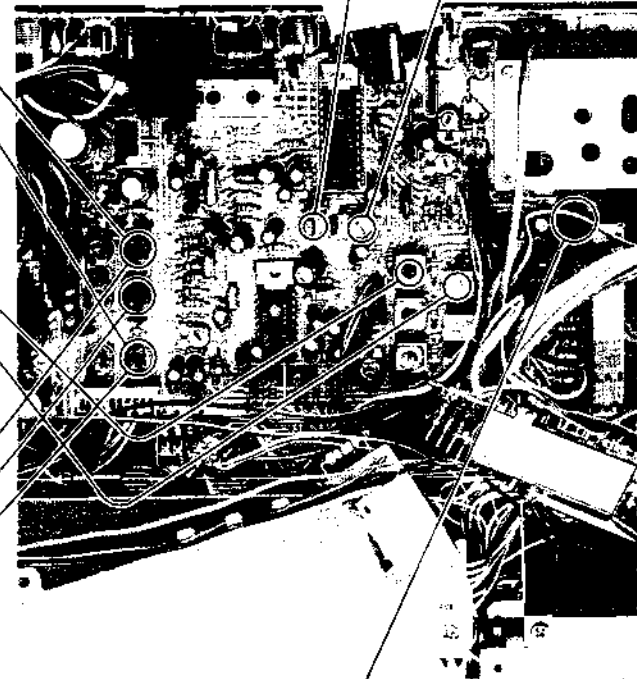


AEP model: Serial No. 501,001 and later  
 AEP model: Serial No. 500,000 - 501,001  
 US model  
 SCN model


MW TRACKING ADJUSTMENT	
Adjust for a maximum reading on VTVM ②.	
L901-1	600kHz
CT201	1,400kHz

Setting: FUNCTION switch TUNER  
 Band Selector switch: LW  
 ANTENNA switch: BUILT IN

AM rf signal generator




Put the lead-wire antenna close to the set.

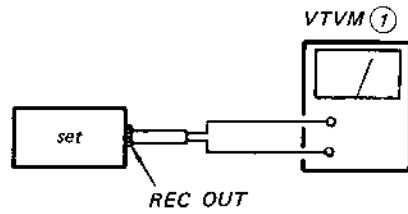


• Repeat the procedures in each adjustment several times, and the frequency coverage and tracking adjustments should be finally done by the trimmer capacitors.

MW/LW EXT ANTENNA COIL ADJUSTMENT

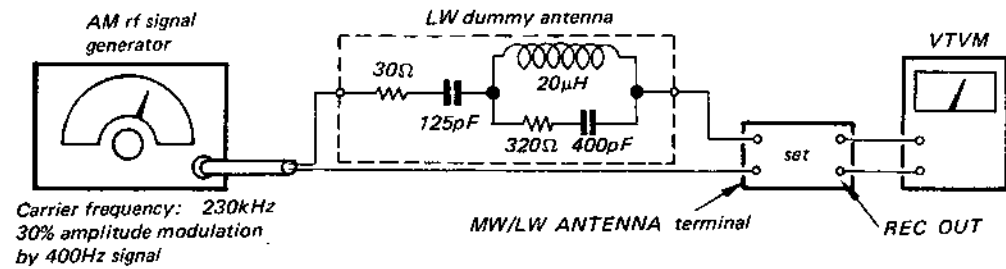

1. Set the ANTENNA switch to EXT position.
2. Tune the set to 230kHz and adjust T204 for a maximum reading on VTVM.

T204

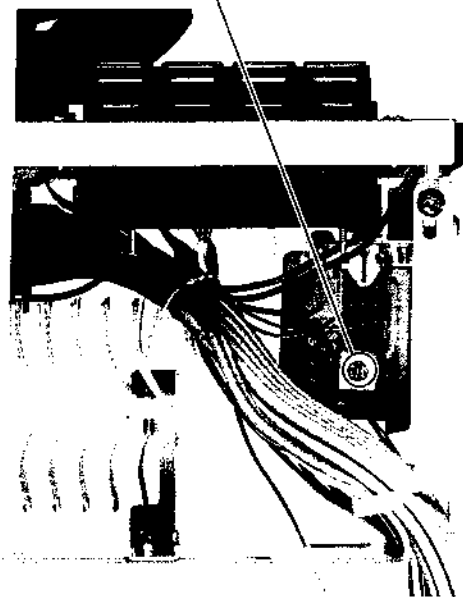

LW FREQUENCY COVERAGE ADJUSTMENT

Adjust for a maximum reading on VTVM ①.



145kHz	T207
365kHz	CT206

Note: Before this adjustment, perform the MW frequency coverage adjustment.

AEP model: Serial No. 501,000 and later



AEP model: Serial No. 500,000 - 501,001  
 UK model  
 SCN model

E901-2	170kHz
CT203	310kHz
Adjust for a maximum reading on VTVM ①.	
LW TRACKING ADJUSTMENT	

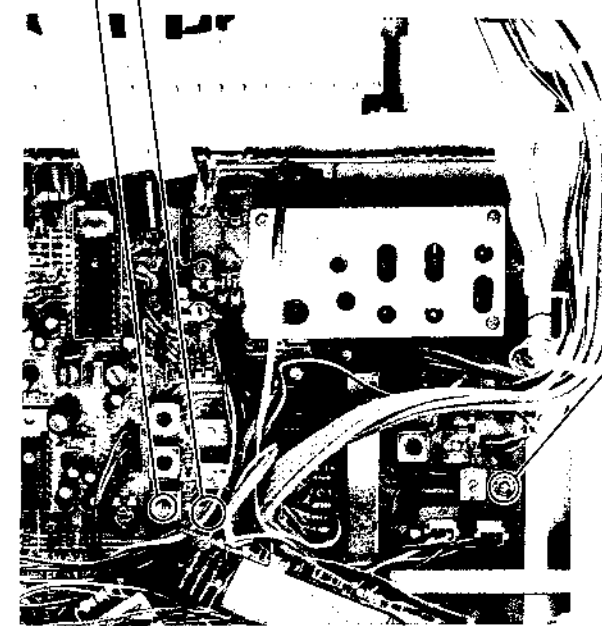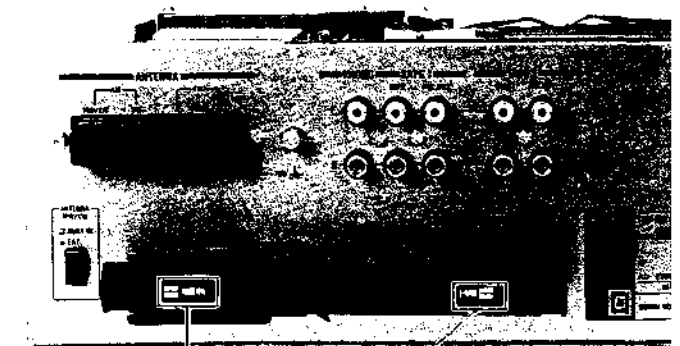




Setting: FUNCTION switch: TUNER  
Band Selector switch: SW

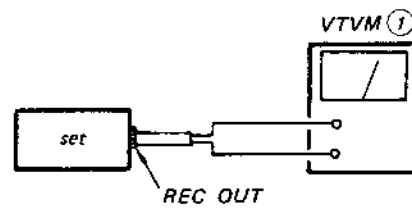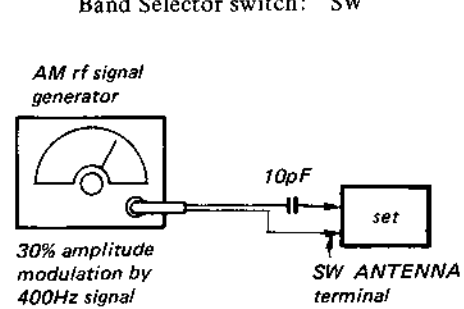

• Repeat the procedures in each adjustment several times, and the frequency coverage and tracking adjustments should be finally done by the trimmer capacitors.

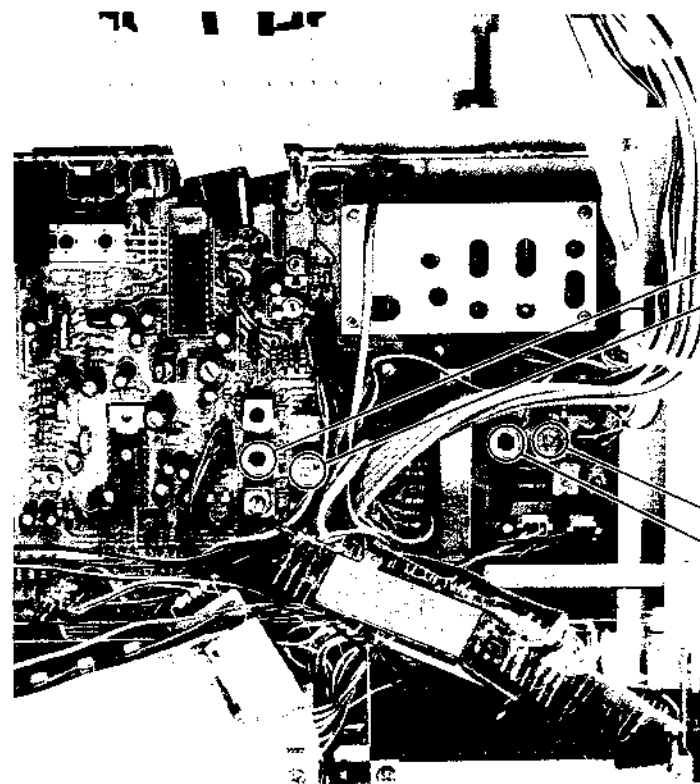

SW FREQUENCY COVERAGE ADJUSTMENT	
Adjust for a maximum reading on VTVM ①.	
T206	5.5MHz
CT205	16.1MHz

Note:  
Before this adjustment, perform the MW frequency coverage adjustment.



SW TRACKING ADJUSTMENT	
Adjust for a maximum reading on VTVM ①.	
CT202	16.1MHz
T203	5.5MHz

SW FREQUENCY INDICATION ADJUSTMENT

Setting: AM Rf Signal Generator: 10,000 MHz

Procedure:

1. Set the Band Selector switch to the SW position and connect a 10kΩ carbon resistor as shown below.
2. Tune the unit to the 10.000MHz signal precisely and adjust RT303 so that the rightmost digit on the display stops flickering.

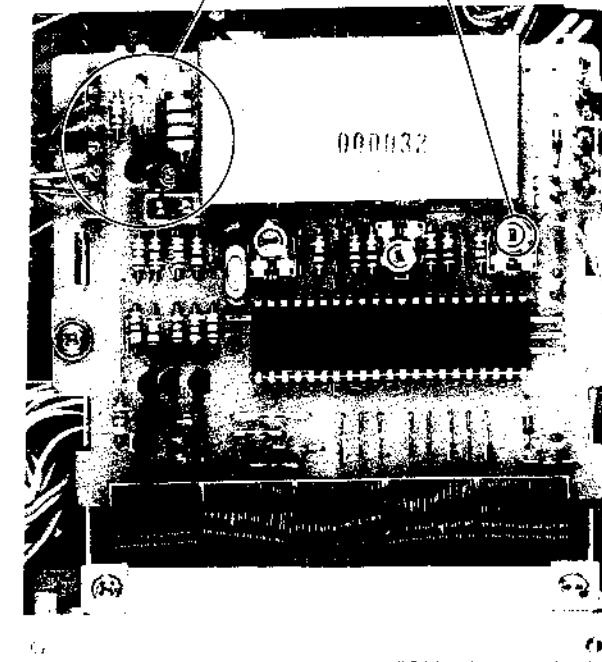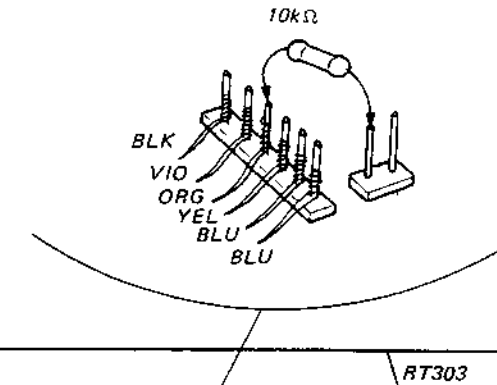

3-2. FM SECTION

**FM DISCRIMINATOR ALIGNMENT 2**

**Setting:** FUNCTION switch: TUNER  
 Band Selector switch: FM  
 MODE switch: MONO

carrier frequency: 98MHz  
 Output level: 1mV (60dB)  
 Modulation: 400Hz, 40kHz deviation (100%)


**Procedure:**  
 Adjust the black core (secondary side) of IFT201 for minimum distortion.

**FM IF ALIGNMENT**

**Setting:** FUNCTION switch: TUNER  
 Band Selector switch: FM  
 MODE switch: MONO

Carrier frequency: 98MHz  
 Output level: 12.5μV (22dB)  
 Modulation: 400Hz, 40kHz deviation (100%)

**Procedure:**  
 Adjust T5 for a maximum reading on VTVM.

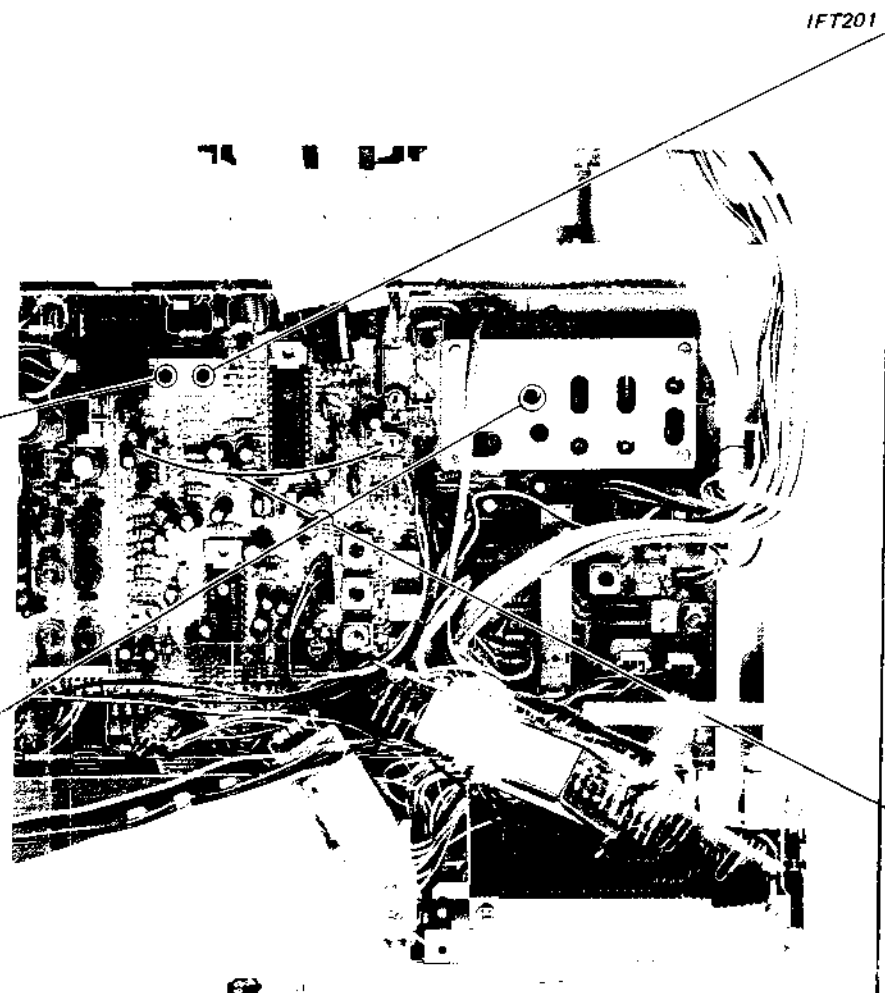

**FM DISCRIMINATOR ALIGNMENT 1**


**Setting:** FUNCTION switch: TUNER  
 Band Selector switch: FM  
 MODE switch: MONO  
 TUNING: Detuned position

**Procedure:**  
 Adjust the orange core (primary-side) of IFT201 for 0V reading on VOM.


**Note:** When replacing the ceramic filter (CF201), perform this alignment.

primary side: ORG  
 secondary side: BLK  
 IC201  
 R214  
 R219  
 IFT201

Setting: FUNCTION switch: TUNER  
 Band Selector switch: FM  
 MODE Selector: MONO

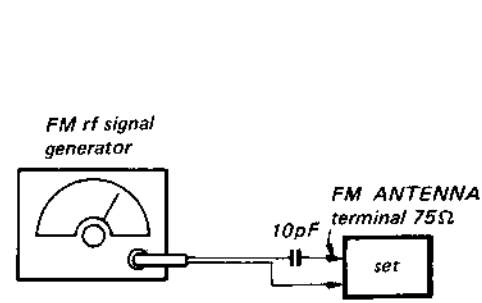

Modulation: 400Hz, 40kHz deviation (100%)

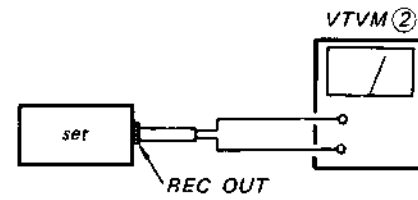

• Repeat the procedures in each adjustment several times, and the frequency coverage and tracking adjustments should be finally done by the trimmer capacitors.

FM TRACKING ADJUSTMENT	
Adjust for a maximum reading on VTVM ②.	
T3	88MHz
T2	
T1	
CT1	108MHz
CT2	
CT3	

**FM FREQUENCY INDICATION ADJUSTMENT**




Setting: FM Rf Signal Generator: 98.0 MHz

Procedure:

- Set the Band Selector switch to the FM position and connect a lead wire as shown below.

- Tune the unit to the 98.0MHz signal precisely and adjust RT301 so that the rightmost digit on the display stops flickering.

FM FREQUENCY COVERAGE ADJUSTMENT			
Tuning Control Voltage Adjustment	Dial Indication	VTVM ① Reading	Adjustment Part
	maximum frequency	22.08V	RT801
	minimum frequency	2.73V	RT803
Adjust for a specified reading on VTVM ①.			
Local Oscillator Frequency Adjustment	Dial Indication	FM Rf Signal Generator Frequency	Adjustment Part
	minimum frequency	88MHz	T4
	maximum frequency	108MHz	CT4
Adjust for a maximum reading on VTVM ②.			
Dial Pointer Setting	Dial Indication	FM Rf Signal Generator Frequency	Adjustment Part
	98MHz	98MHz	RT802
Adjust for a maximum reading on VTVM ②.			

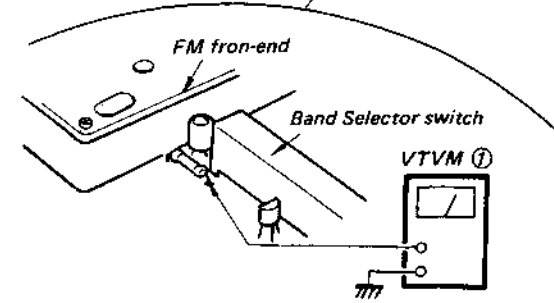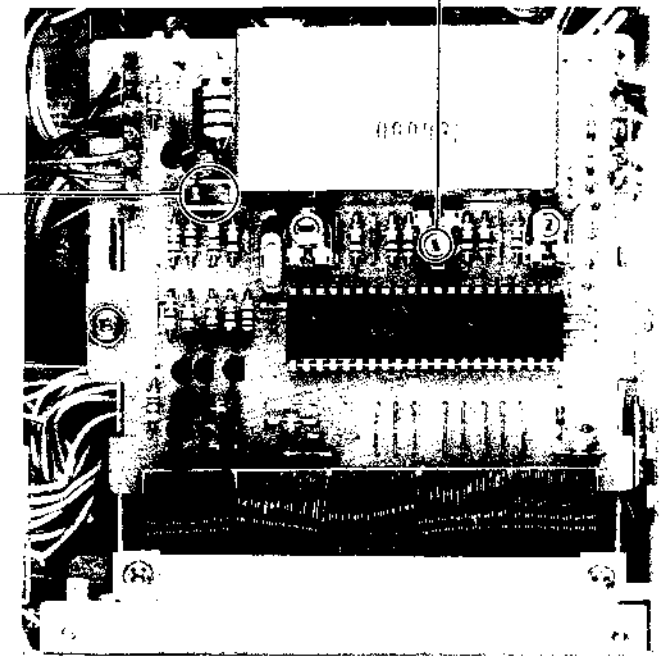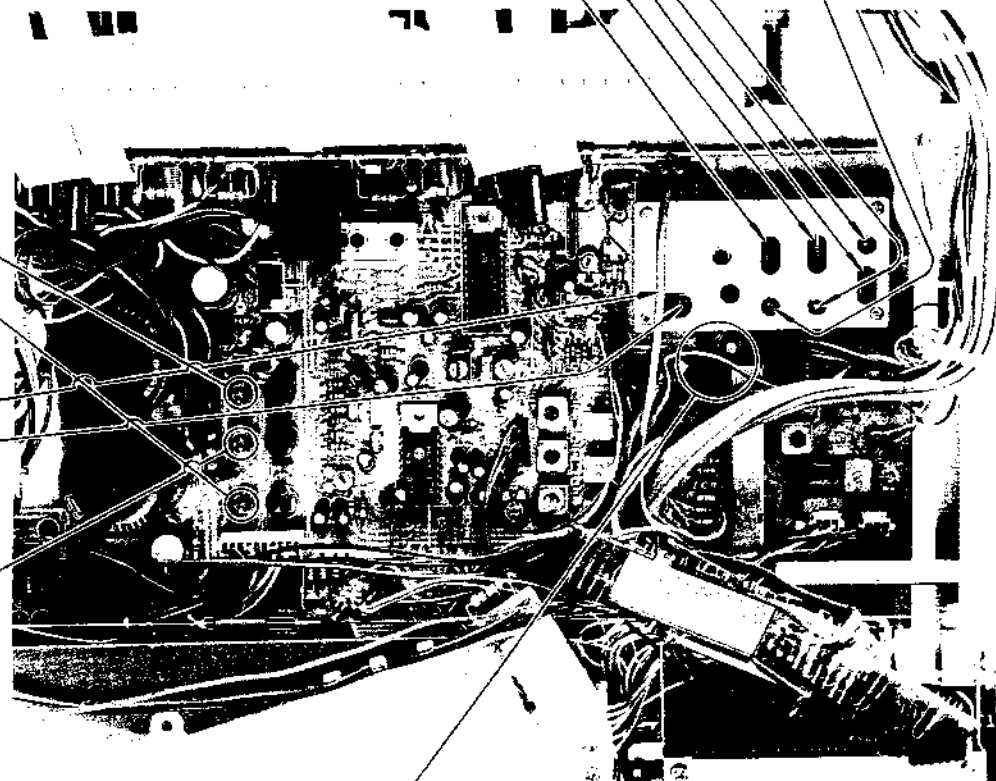

### VCO ADJUSTMENT

Setting: FUNCTION switch: TUNER  
Band Selector switch: FM  
MODE switch: STEREO/FM-AM MUTING

**A) Regular Method**

FM stereo signal generator

Carrier frequency: 98MHz  
Output level: 1mV  
Modulation: no modulation

FM ANTENNA terminal 75Ω

frequency counter



**Procedure:**  
Adjust RT204 for 76kHz ±100Hz on the frequency counter.

**B) Simple Method**

**Procedure:**

1. Turn the set to the FM stereo broadcasting signal.
2. Turn RT204 clockwise or counterclockwise and memorize the lighting-up range of STEREO lamp.
3. Secure at the center in lighting-up range of both turns as shown below.

center of lighting-up ranges  
lighting-up range

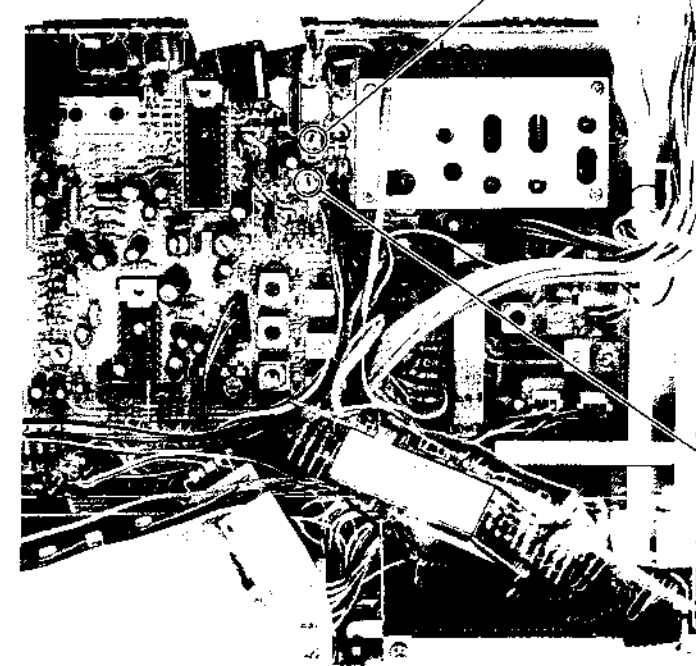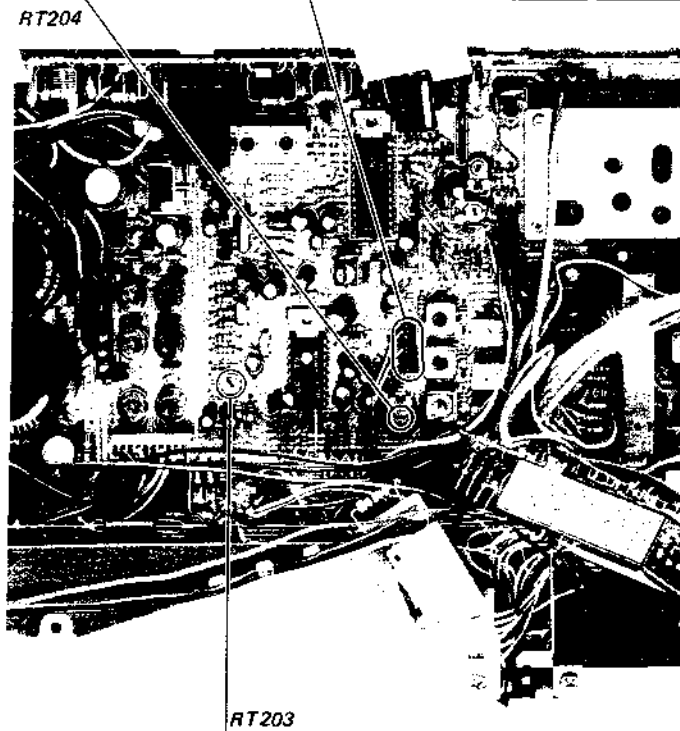

### MUTING LEVEL ADJUSTMENT

Setting: FUNCTION switch: TUNER  
Band Selector switch: FM  
MODE switch: STEREO/FM-AM MUTING

**Procedure:**

FM rf signal generator

Carrier frequency: 98MHz  
Modulation: 400Hz, 40kHz deviation (100%)  
Output level: 16μV (22dB)

FM ANTENNA REC OUT

**Procedure:**  
Turn RT201 and stop it just when the VOM indication suddenly decreases.

### SIGNAL METER CALIBRATION

Setting: FUNCTION switch: TUNER  
Band Selector switch: FM

FM rf signal generator

Carrier frequency: 98MHz  
Modulation: 400Hz, 40kHz deviation (100%)

FM ANTENNA terminal

**Procedure:**  
Adjust RT202 for the specified meter indication.

Generator Output Level	Meter Indication
100μV (40dB)	Light.  SIGNAL
1000μV (60dB)	Light.  SIGNAL

### FM STEREO SEPARATION ADJUSTMENT

Setting: FUNCTION switch: TUNER  
Band Selector switch: FM  
MODE switch: STEREO/FM-AM MUTING

FM stereo signal generator

Carrier frequency: 98MHz  
Output level: 1mV (60dB)  
Modulation:  
Audio (400Hz): 20kHz deviation (50%)  
Pilot (19kHz): 6.3kHz deviation (16%)  
Sub channel (38kHz): 20kHz deviation (50%)

FM ANTENNA 75Ω REC OUT

**Procedure:**

FM stereo signal generator output channel	VTVM connection	VTVM reading (dB)
L-CH	L-CH	(A)
R-CH	L-CH	(B)
R-CH	R-CH	(C)
L-CH	R-CH	(D)

Adjust RT203 resistor for minimum reading.

L-CH Stereo separation: (A) - (B)  
R-CH Stereo separation: (C) - (D)

The separations of both channels should be equal.


The difference between separations (A)-(B) and (C)-(D) are to be equal.

**POWER LEVEL METER BRIGHTNESS ADJUSTMENT**

**Procedure:**

Adjust RT701 for the same brightness of L-CH and R-CH power level meters.


Adjustment Location: meter board

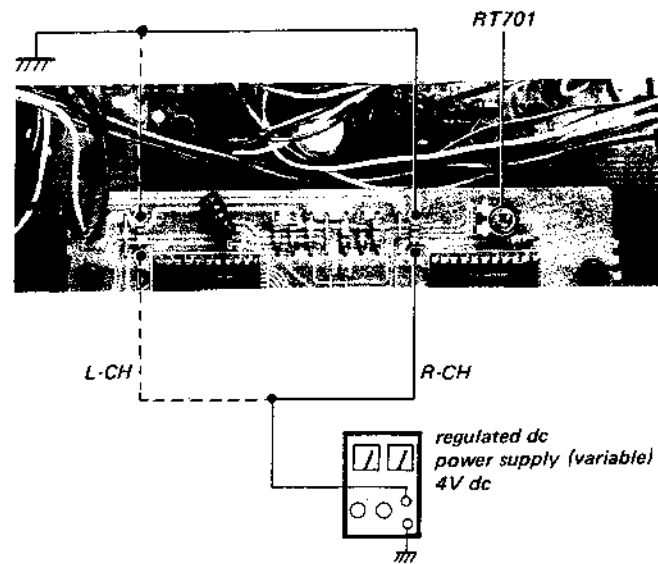

**POWER LEVEL METER CALIBRATION**


Setting: FUNCTION switch: TAPE 1  
MODE switch: STEREO/FM-AM  
MUTING

**Procedure:**

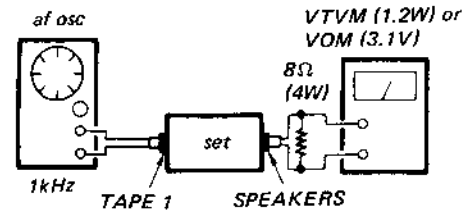

1. Adjust the VOL and the BAL controls for a 1.2W VTVM reading or a 3.1V VOM reading. (for both channels)
2. Adjust RT601 (L-CH) and RT651 (R-CH) so that the power level meter indicates 1.2W.


Adjustment Location: power amp board

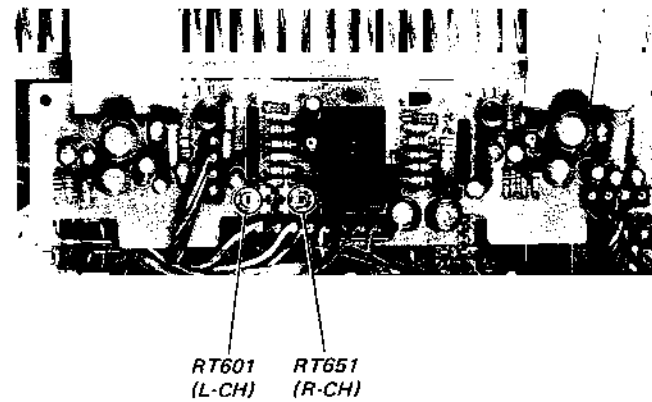


**Replacement Semiconductors**

For replacement, use semiconductors except in ( ).


Q201-203, 213, 301, 307, 308, 802 : 2SC1364 (2SC1815)  
Q204 : 2SC1345




IC301: LC7253




D203-215, 301-313, 813-815, 907, 908 : 1S1555




IC302: MSL2318RS




D314, 808 : EOB01-05 (EQA01-05R)  
D315 : EOB01-09 (EQA01-09R)  
D807 : EOB01-16 (EQA01-16R)  
D809, 810 : EOB01-22 (EQA01-22R)




Q205-211, 302-305, 803 : 2SA1015




IC401, 451 : HA1457  
IC501, 551




Q306: 2SC710




D601, 602, 806: 10E2 (RA1Z)




Q801: 2SC1173




IC601, 651: SI1340H




D801-804: U05G (SZV20)




Q804: 2SC1475 (2SD571)



IC602: HA1200Z




Q805: 2SB605




D805: SIVB20 (SIVB10)




IC201: CX168




IC701, 751: 1R2406G




D901: GL9PR21  
D902: GL9NG21




IC202: CX178





D201, 202: ISV118




D903-906: GL2HY1




4-1. MOUNTING DIAGRAM  
- Conductor Side -

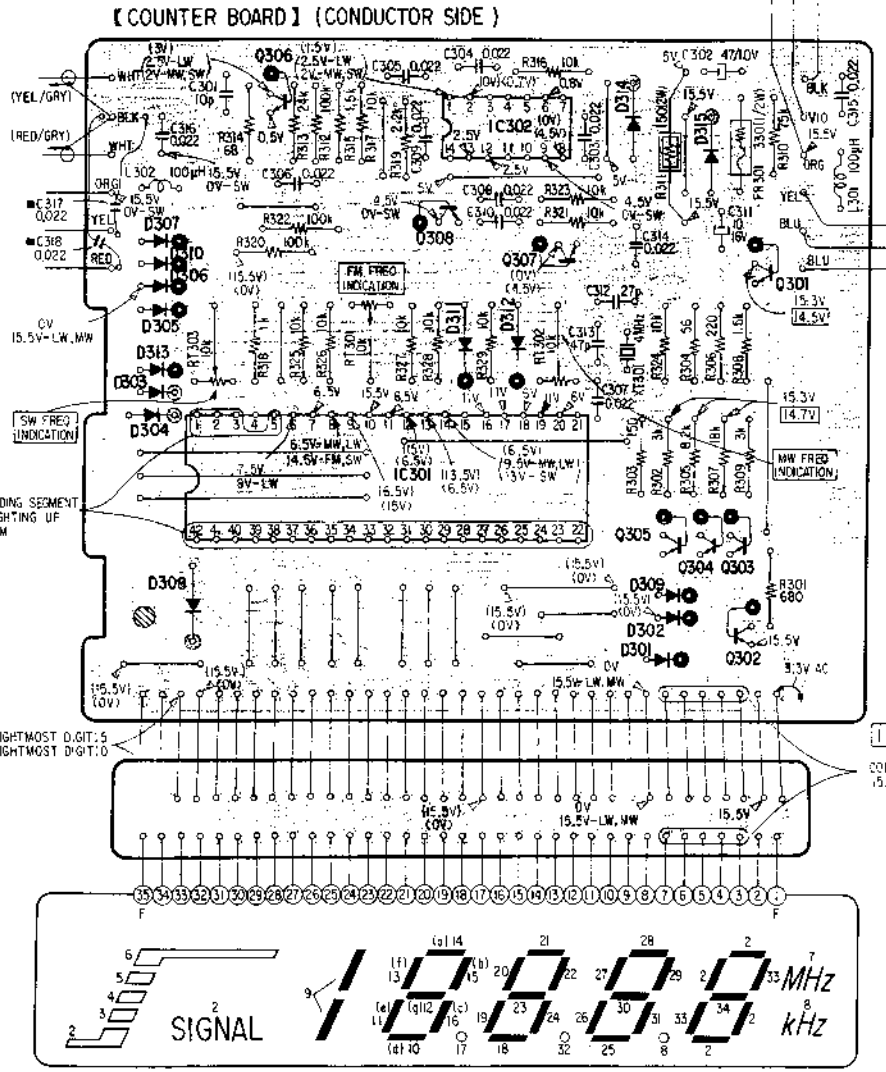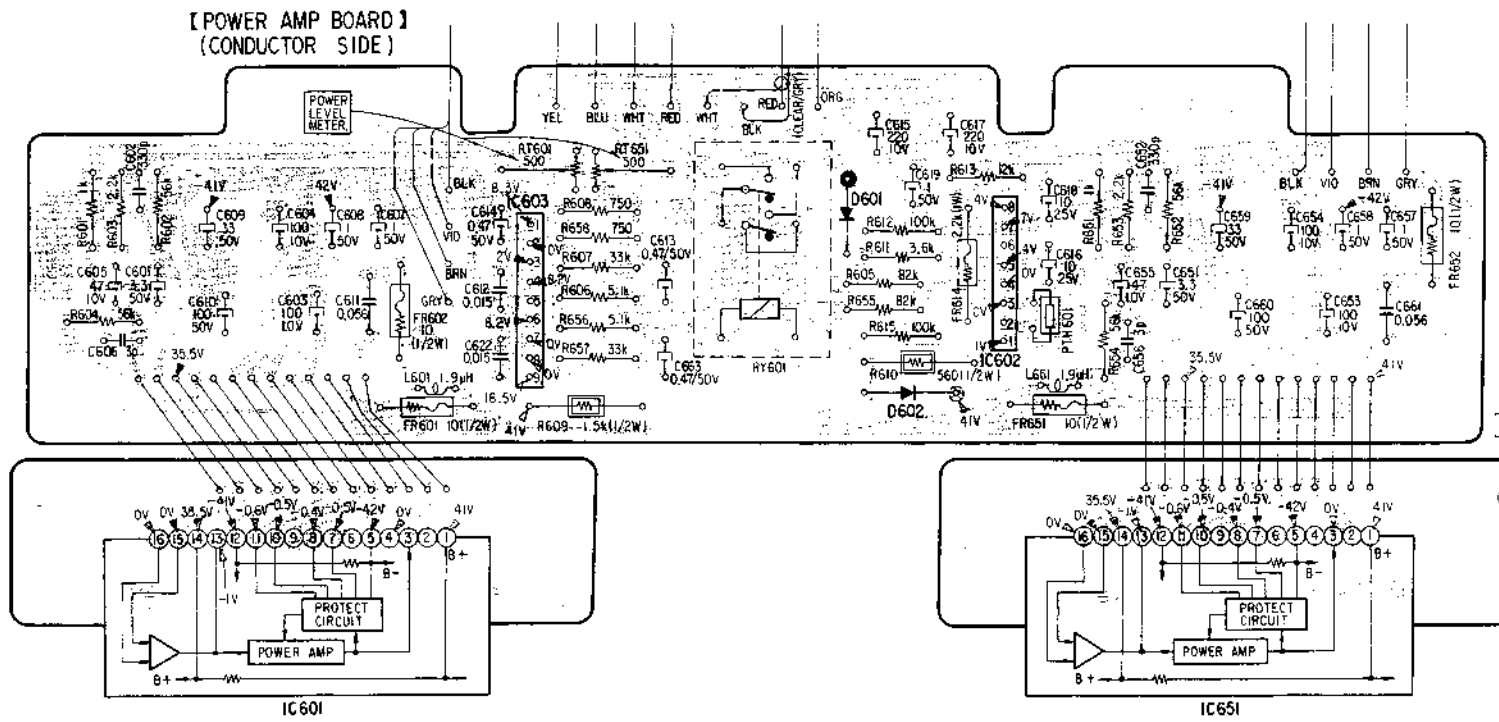


Q, IC	D
306	314
IC302	315
308	307
307	310
301	306
	305
	311, 312
	313
	303
	304
IC301	
303-305	
302	309
	302
	301


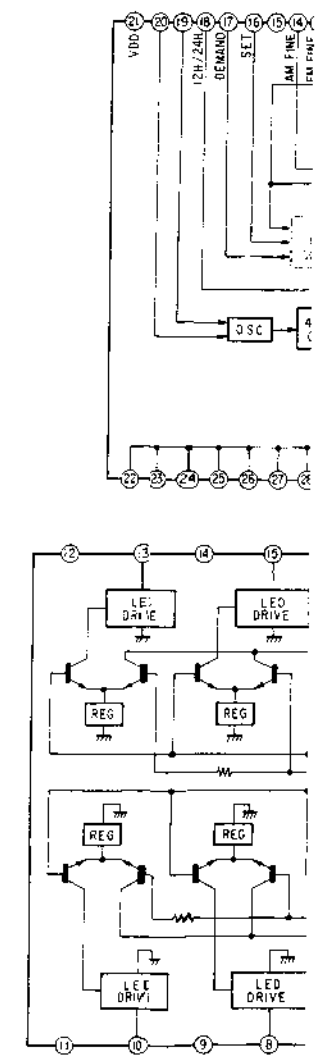


Note:  
● Color code of sleeving over the end of the jacket.









- : parts extracted from the component side.
- : parts extracted from the conductor side.
- : part mounted on the conductor side.
- (with B+) : B+ pattern.



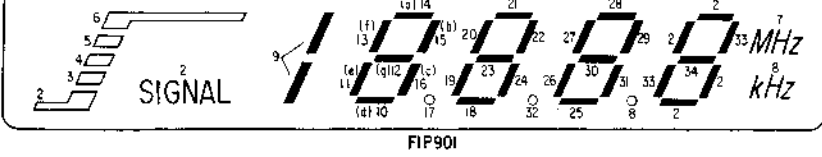


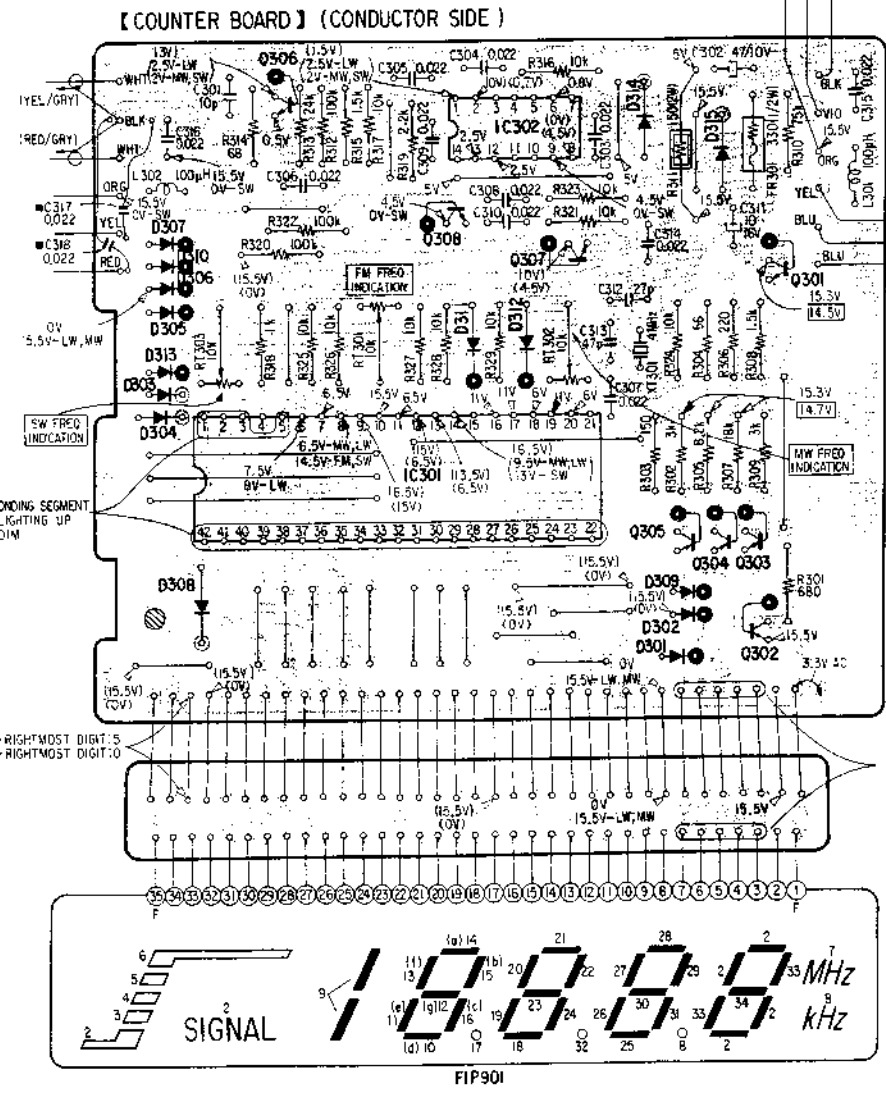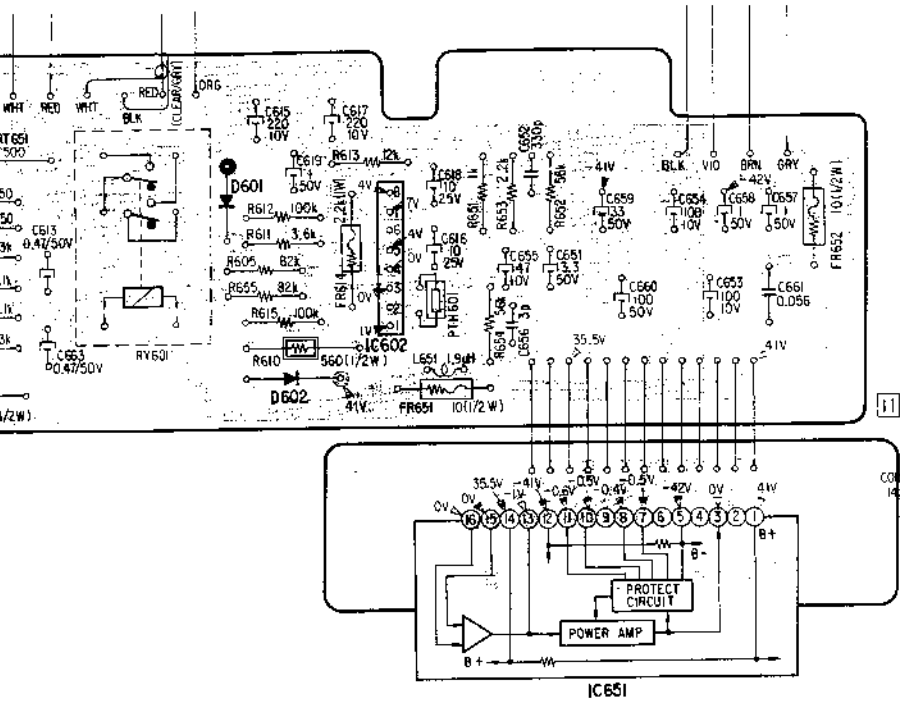


Q, IC	D
306	314
IC302	315
308	307
307	310
301	306
	305
	311,312
	313
	303
	304
IC301	
303-305	
308	309
302	302
	301

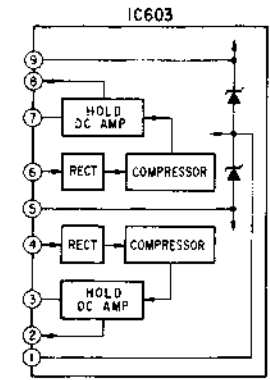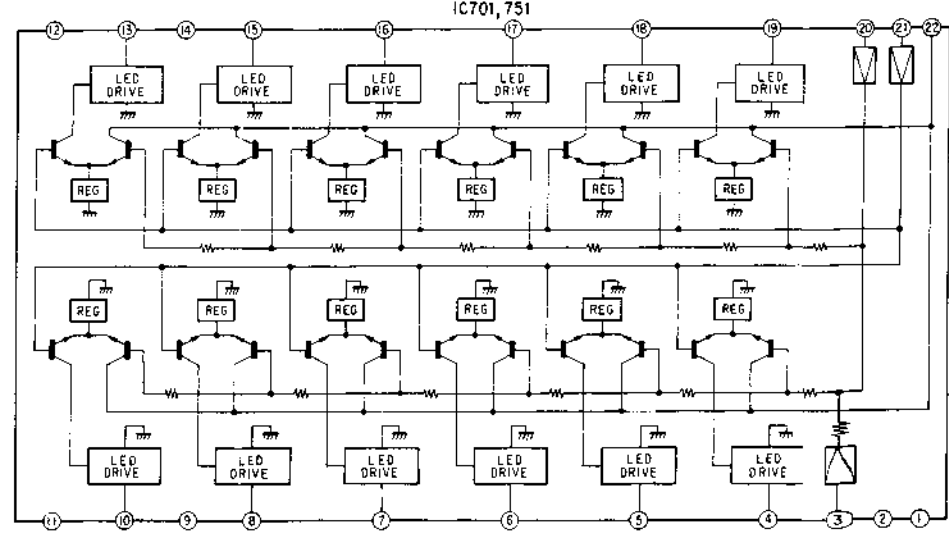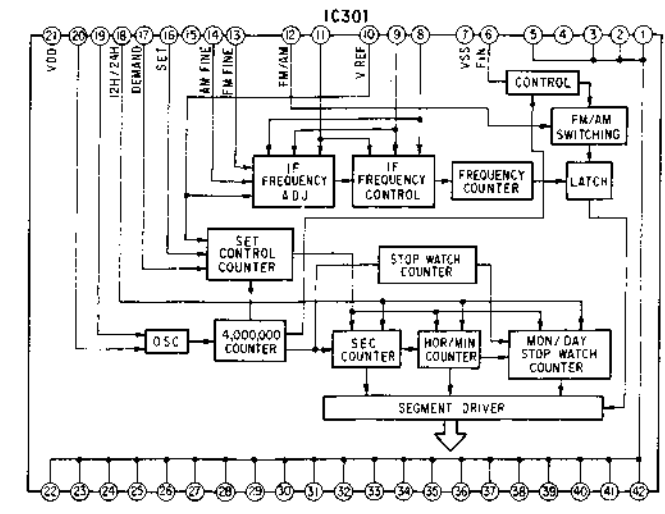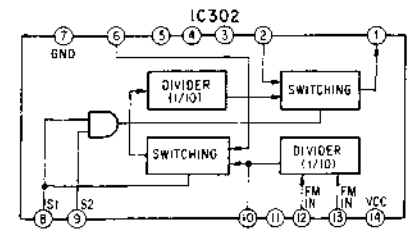



the jacket.  
component side.  
conductor side.  
r side.

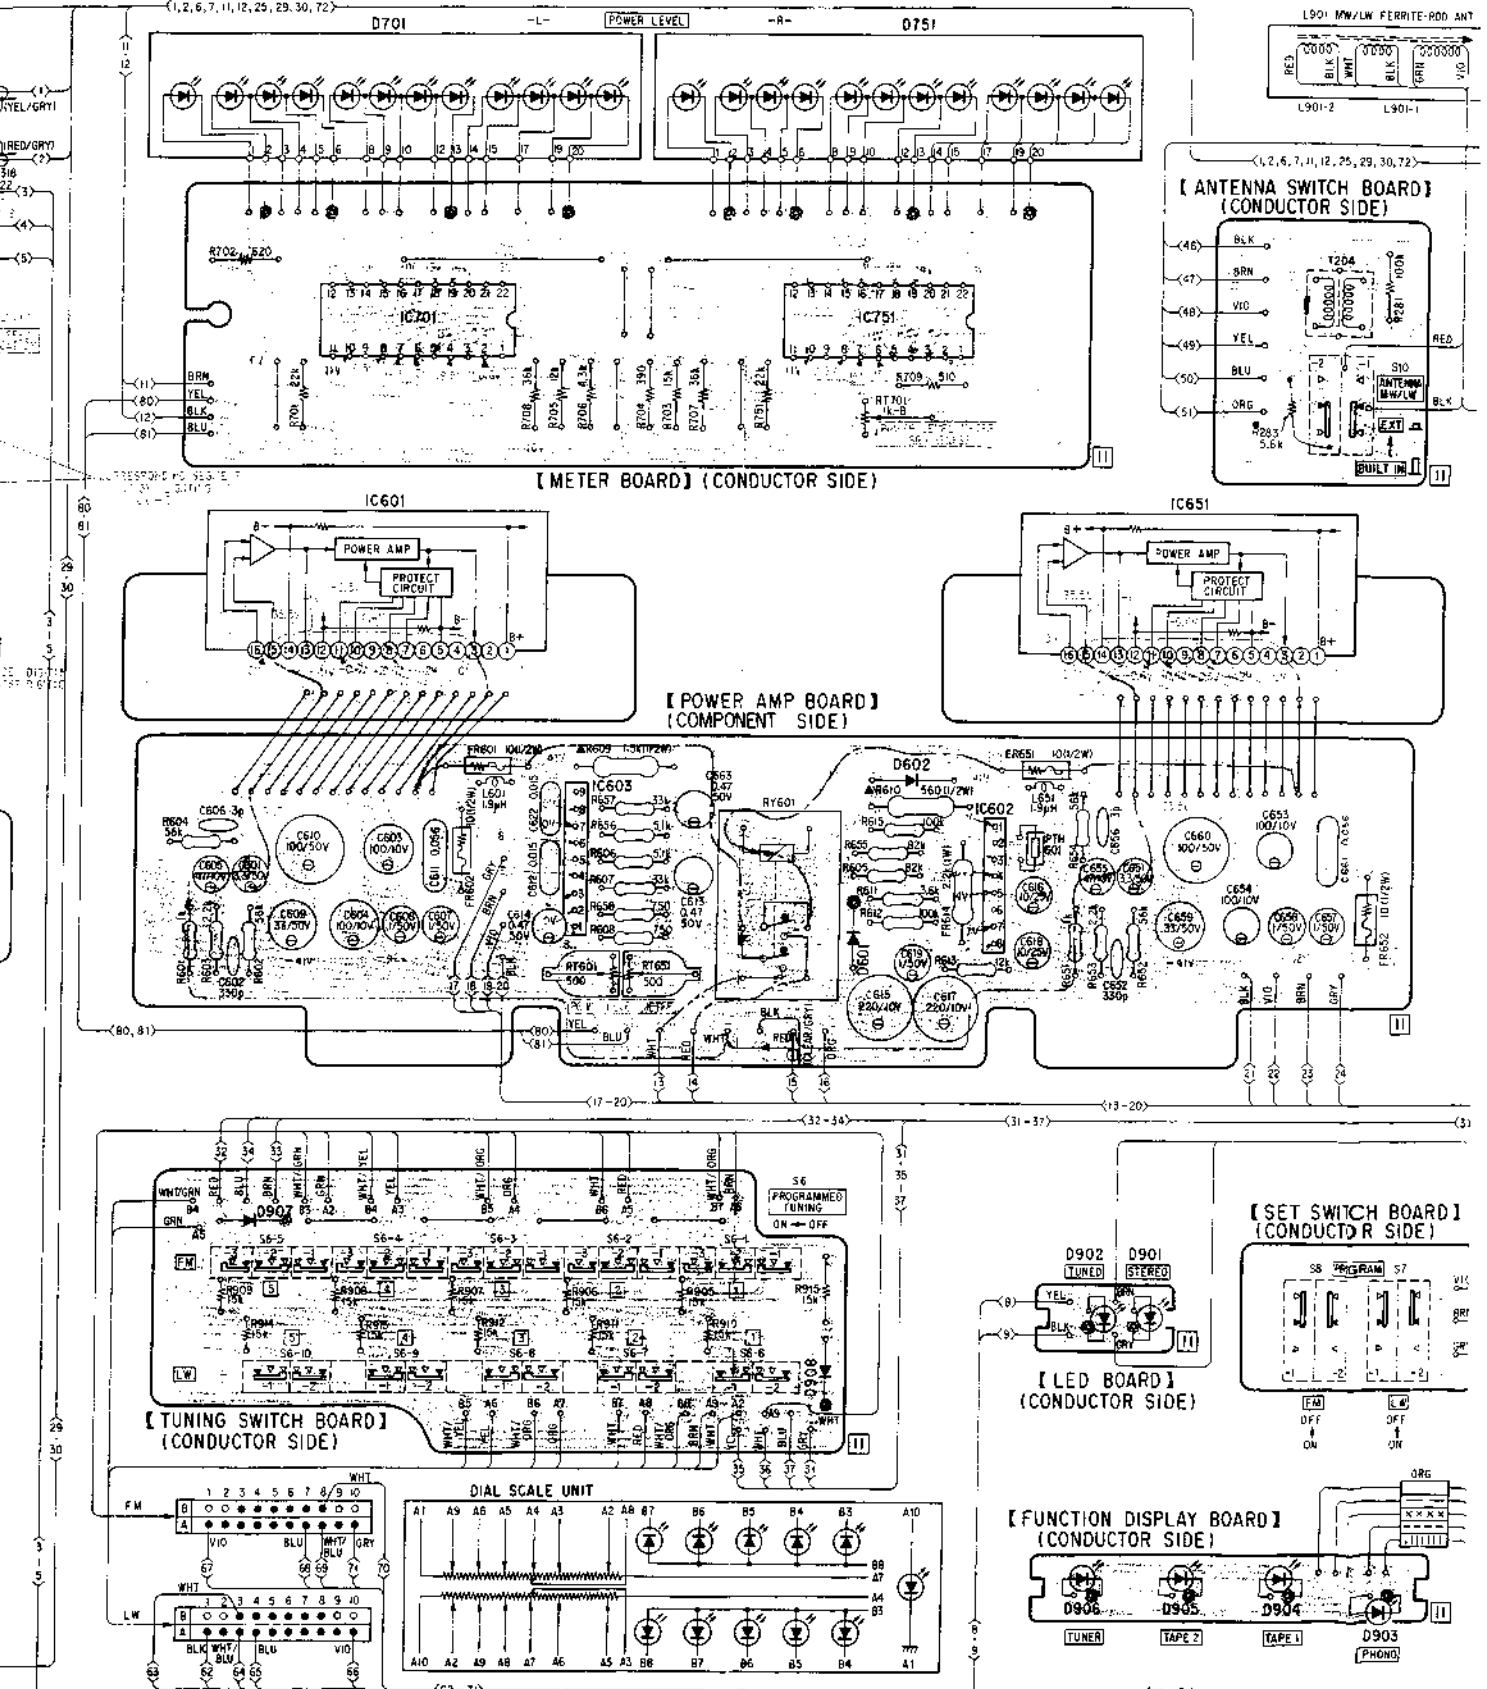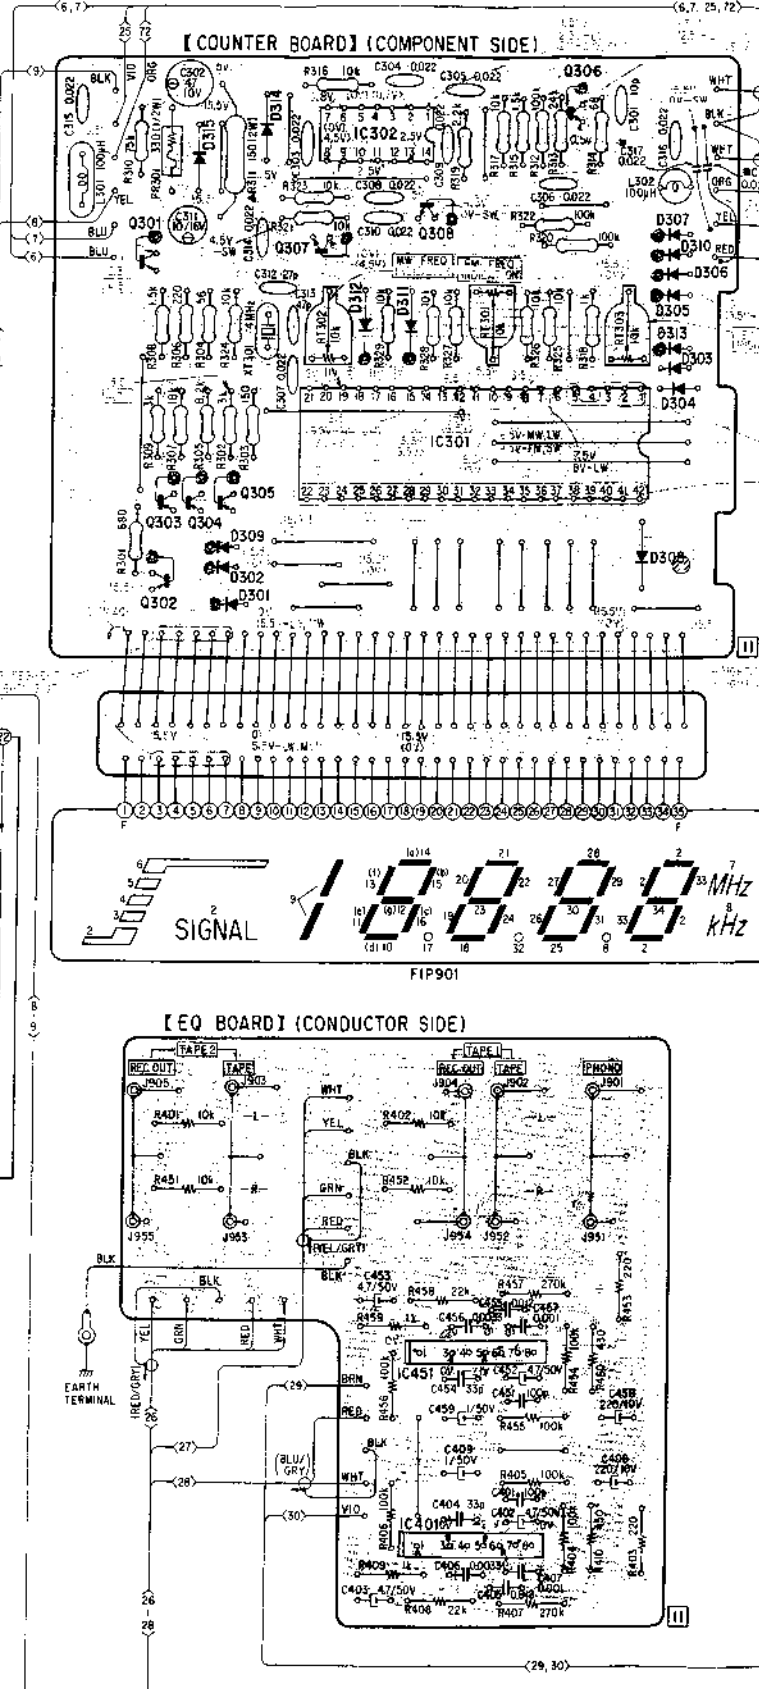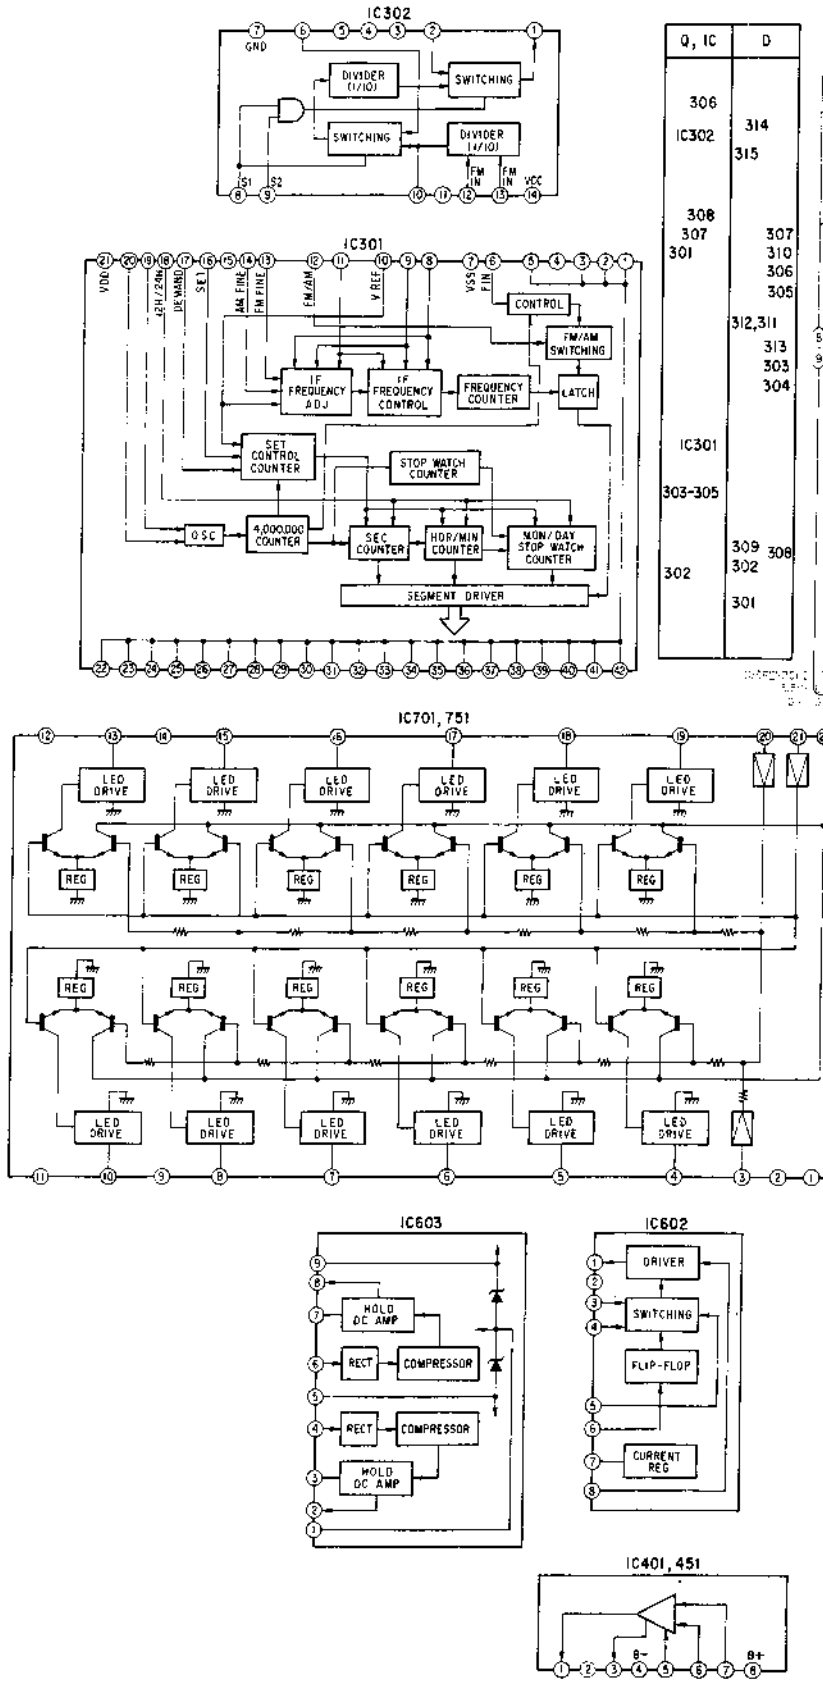



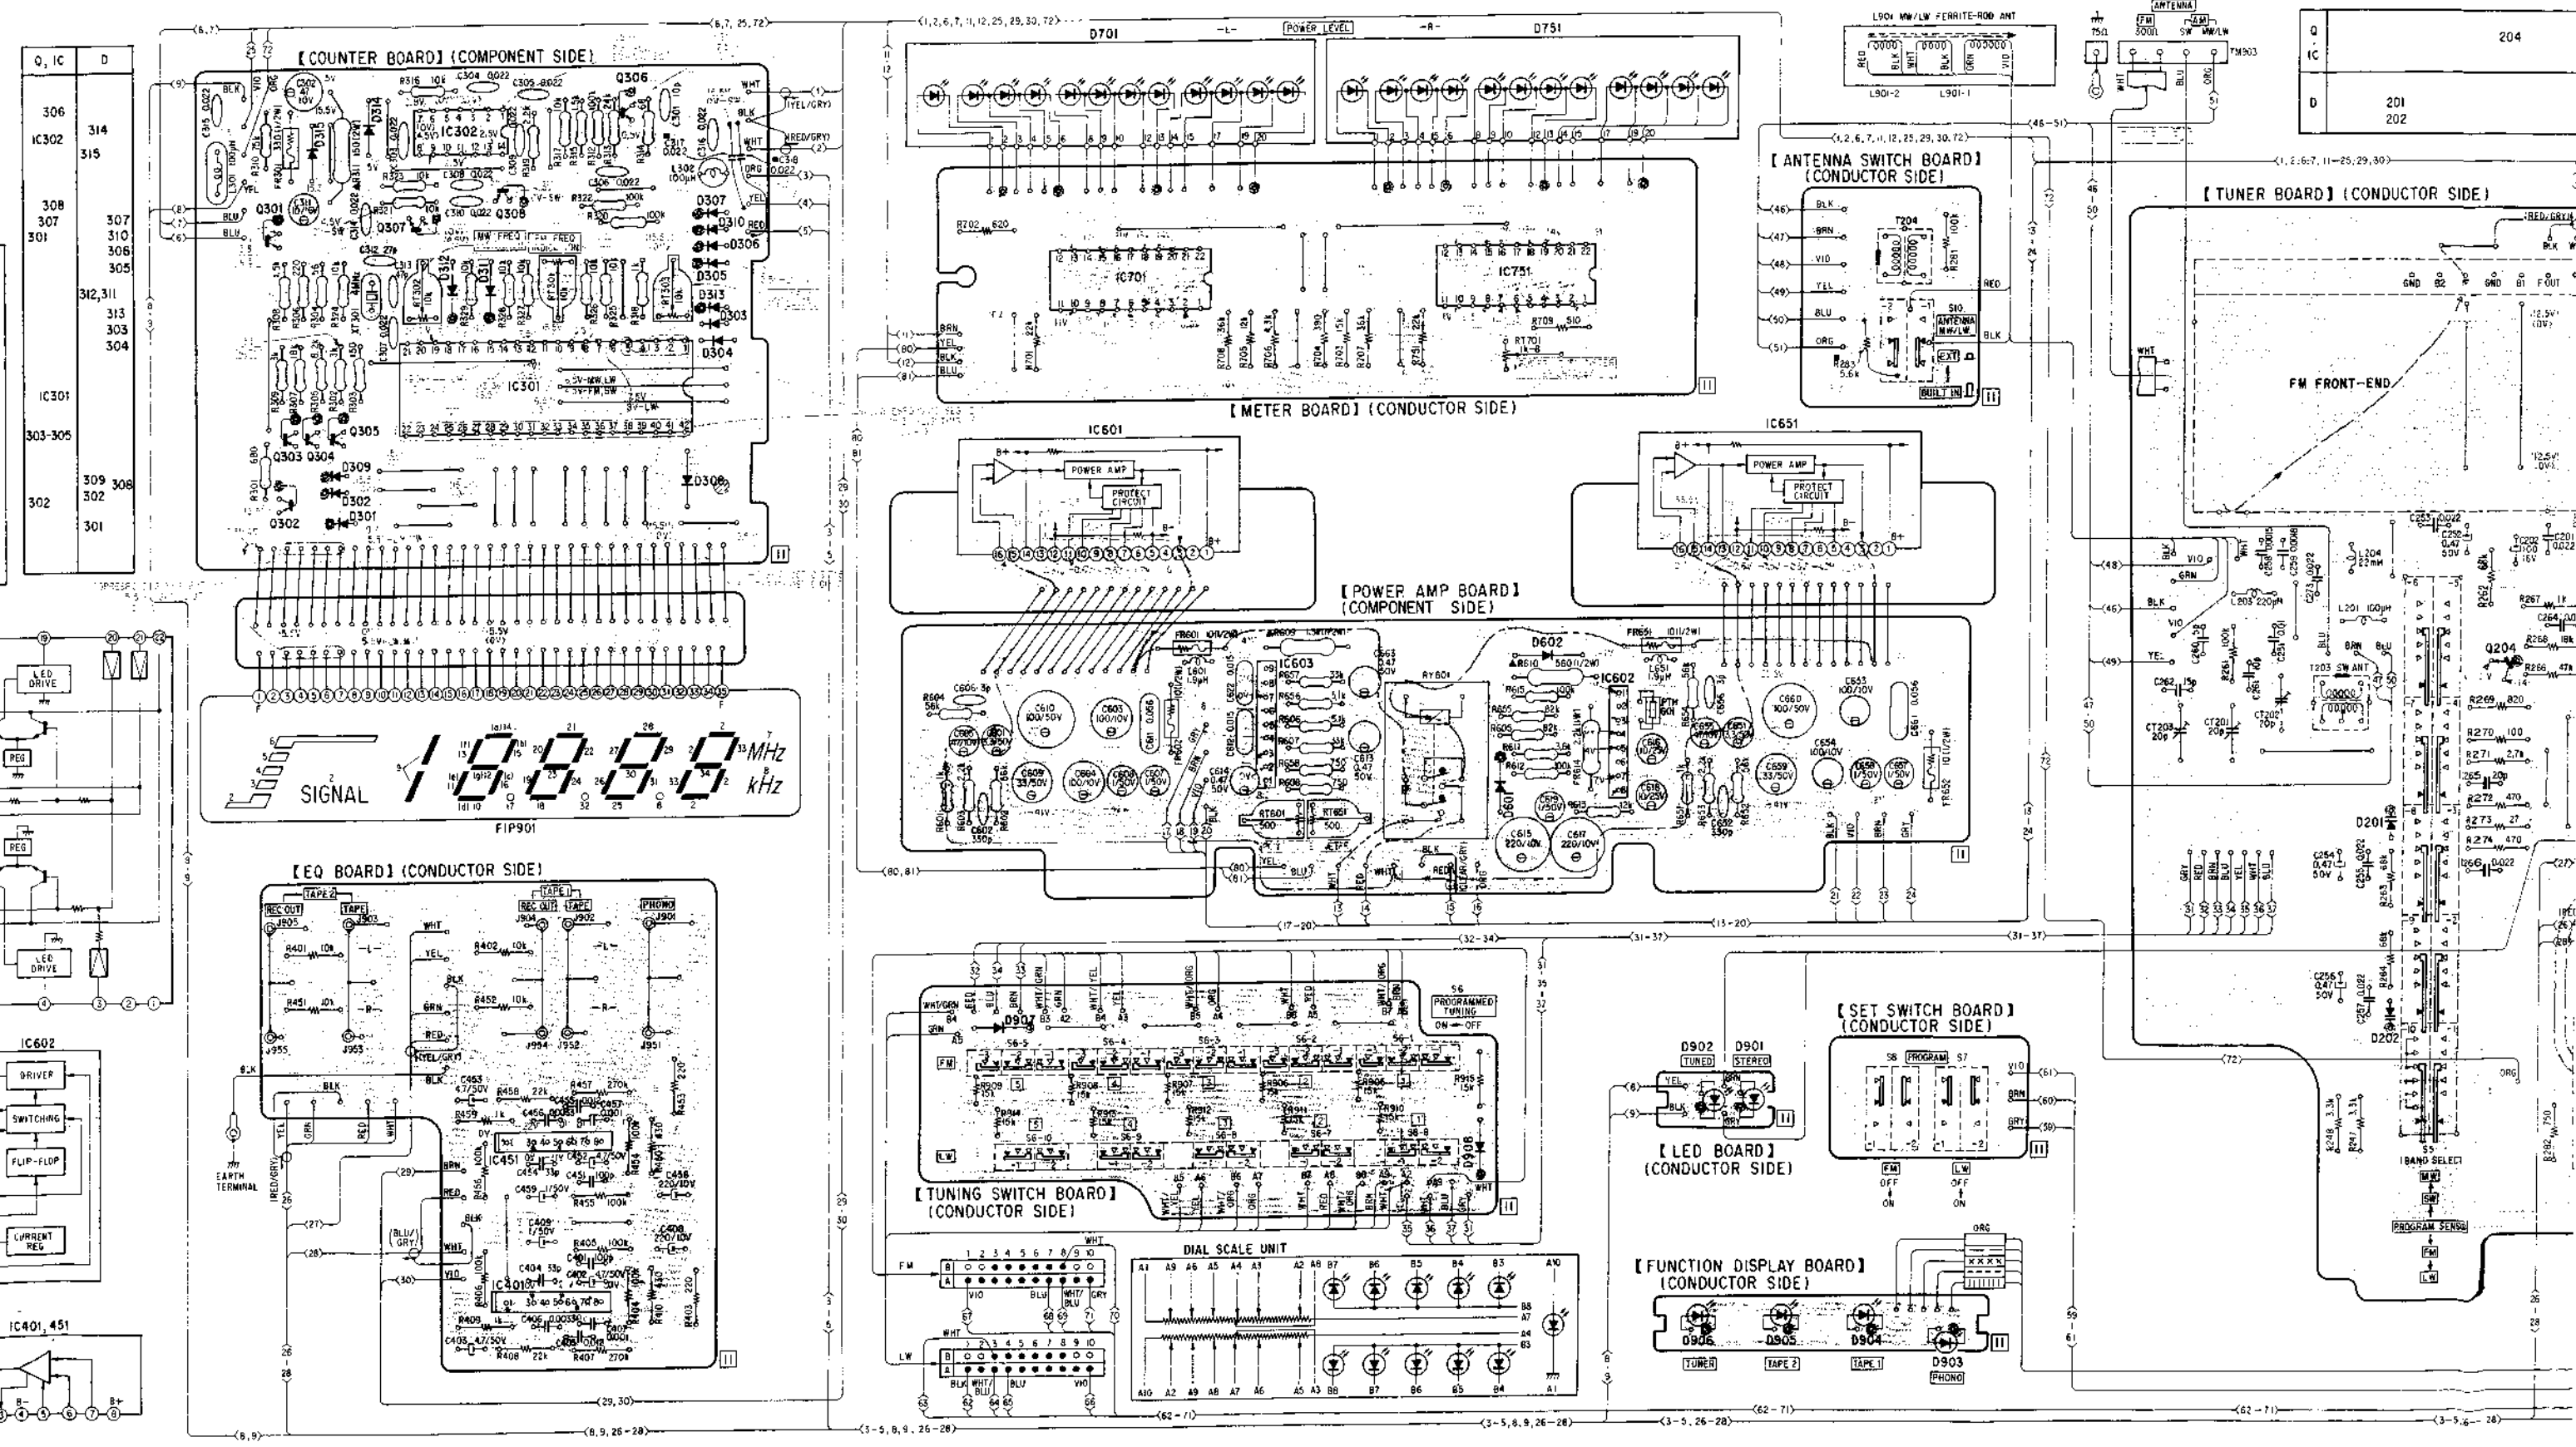



202	203	IC201	205	IC202	213	201	801	802	803		Q
			206	207		208	209	210	212	804	IC
	208	203	204	205	206	212,211	210,209	213	807	813	D
	207								214	215	
									806	805,804,802,801	
										809	
										810	
										814	
										815	

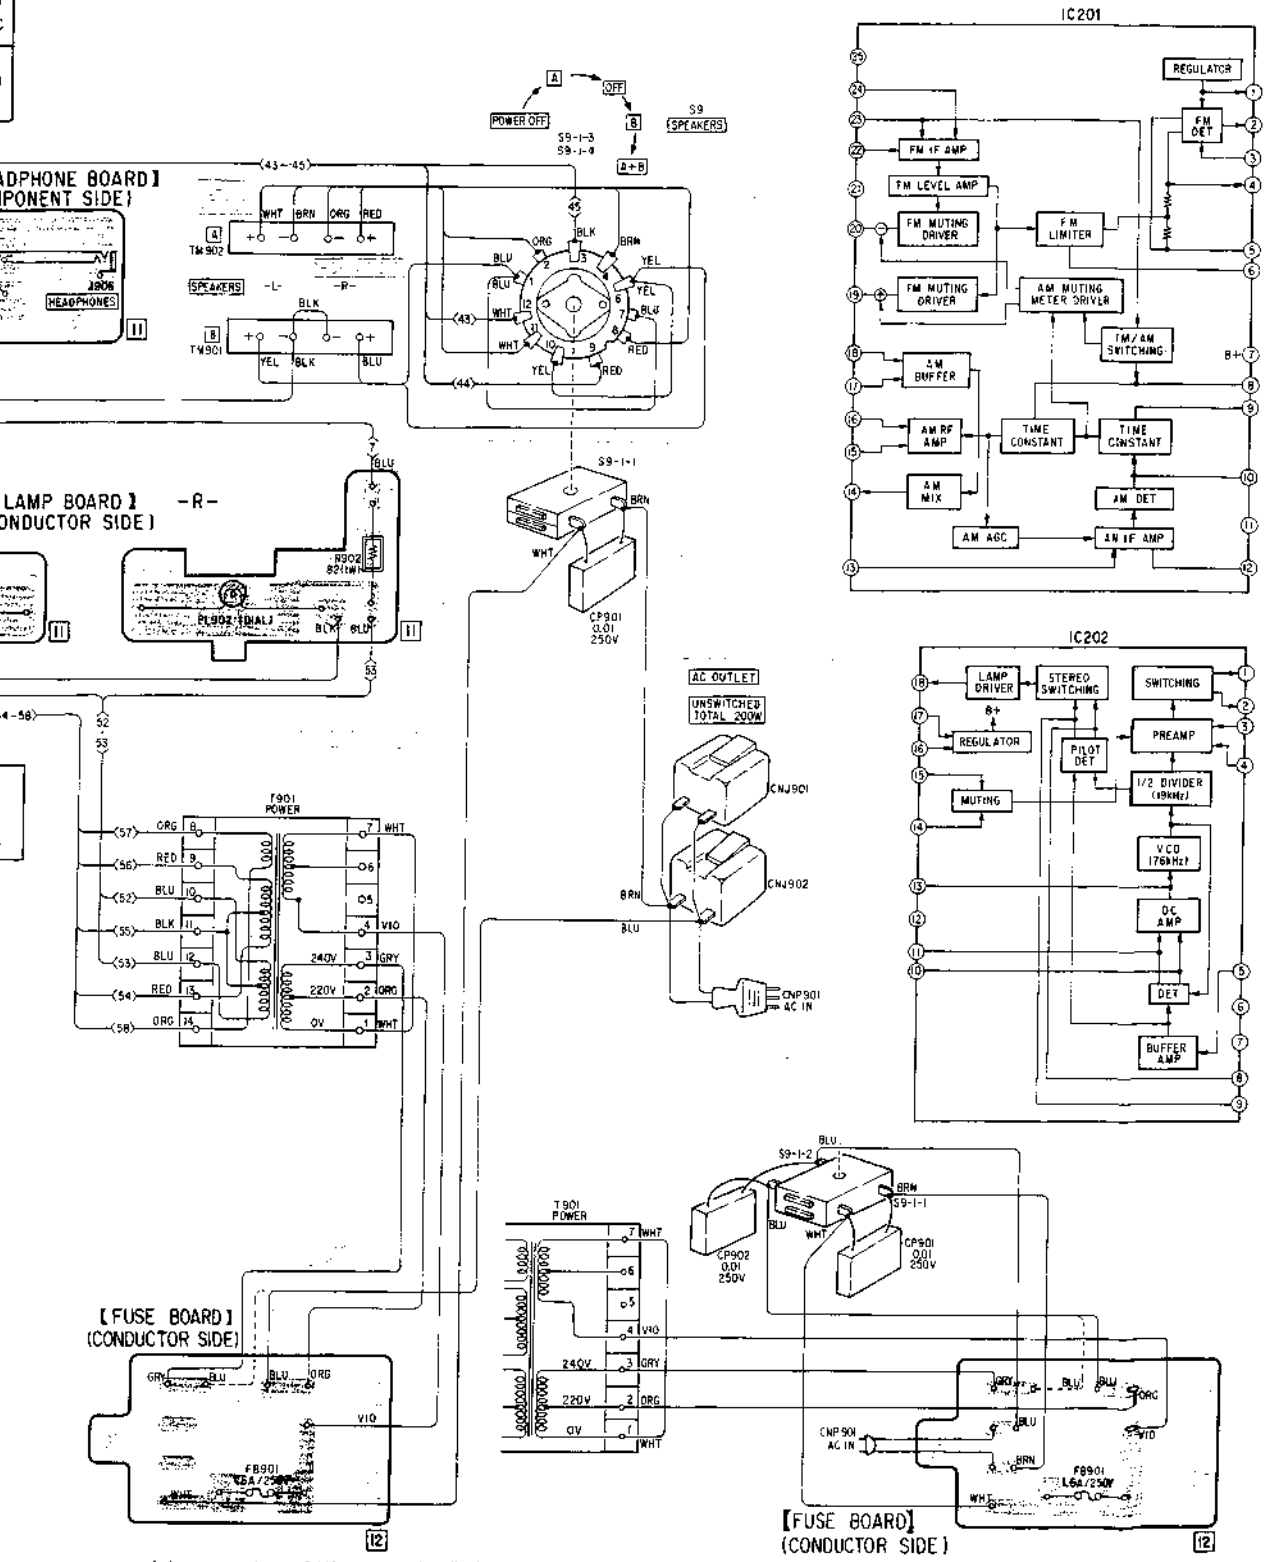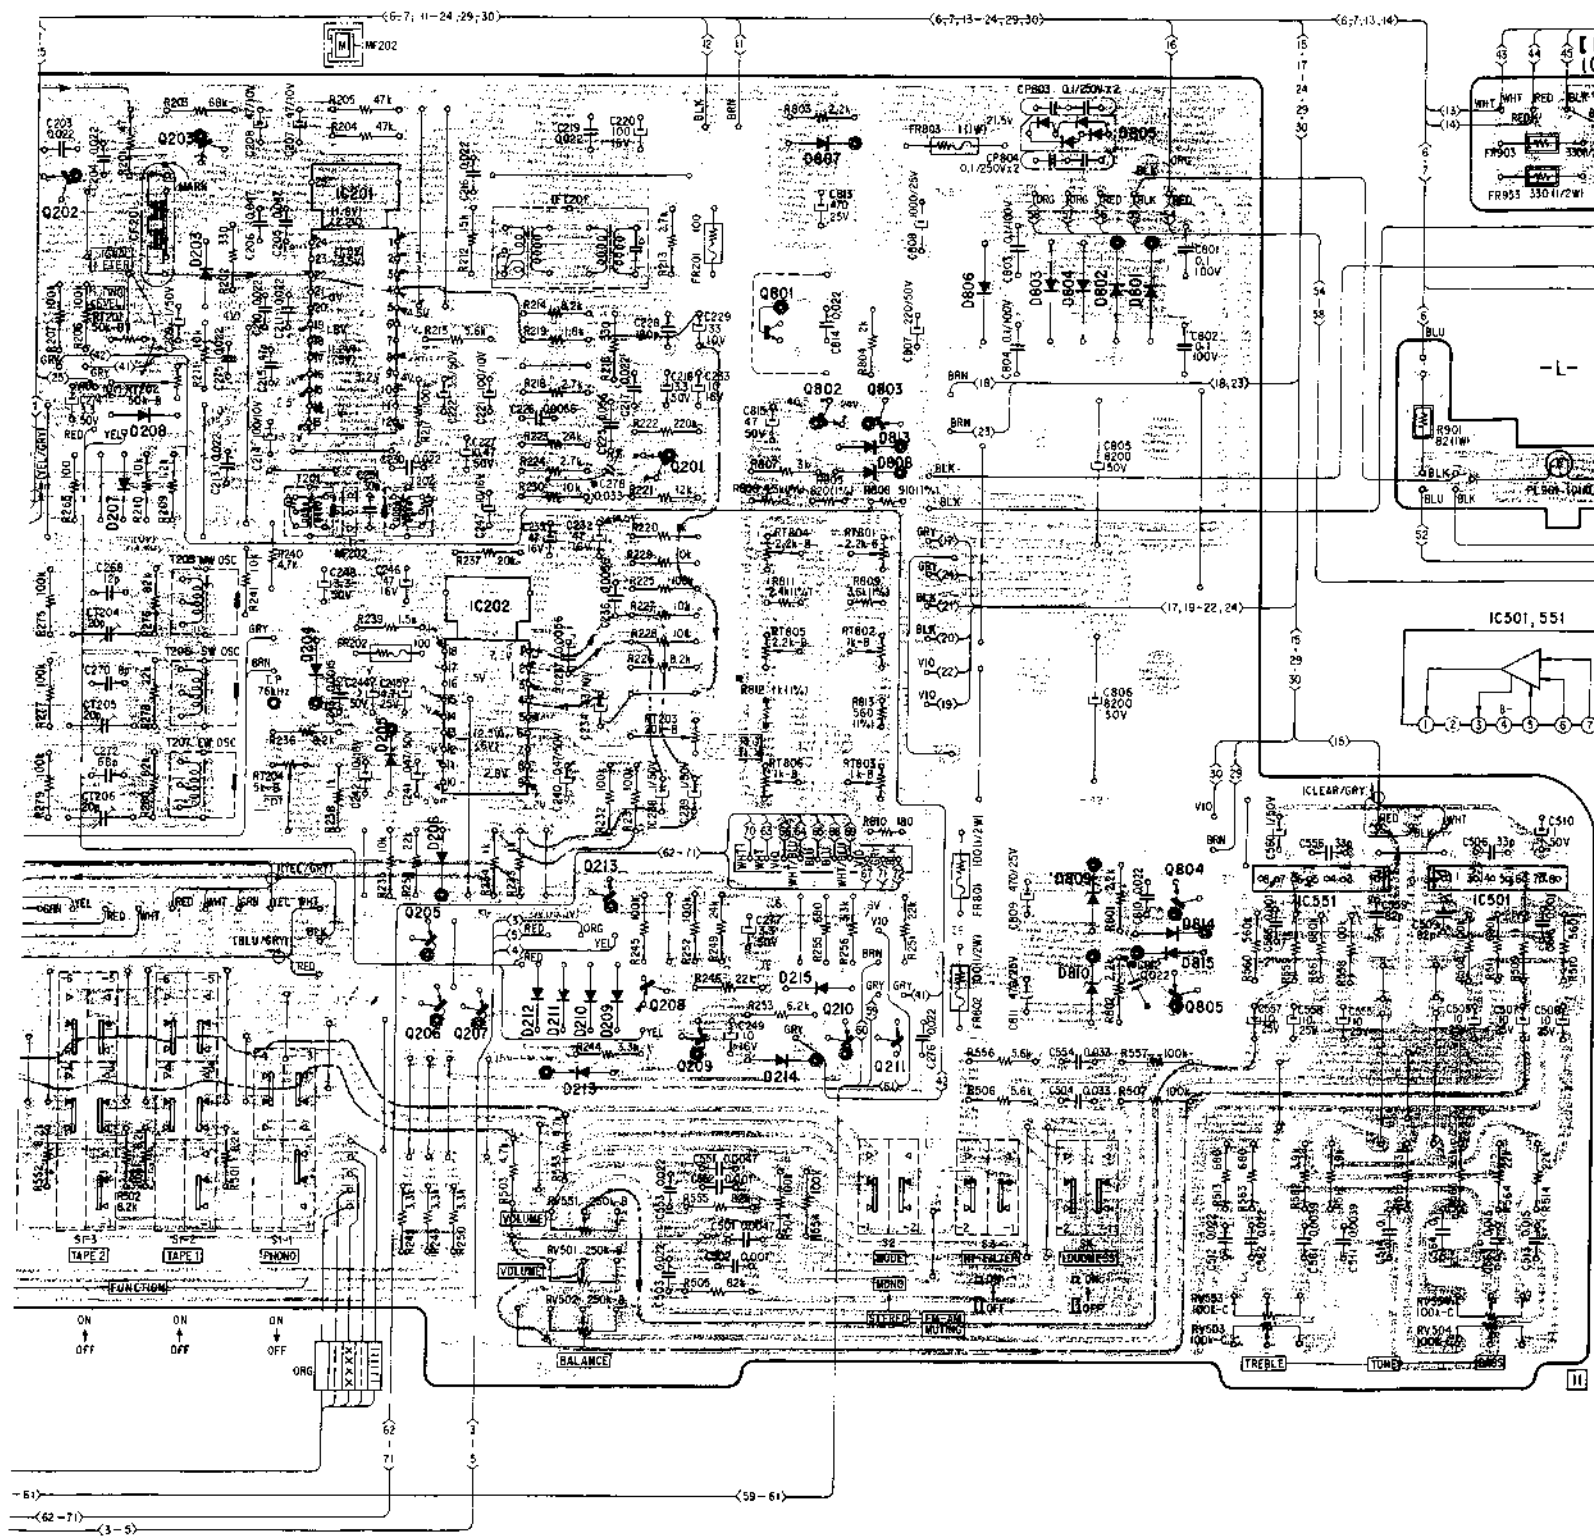

# STR-434L STR-434L

## 4-3. SCHEMATIC DIAGRAM

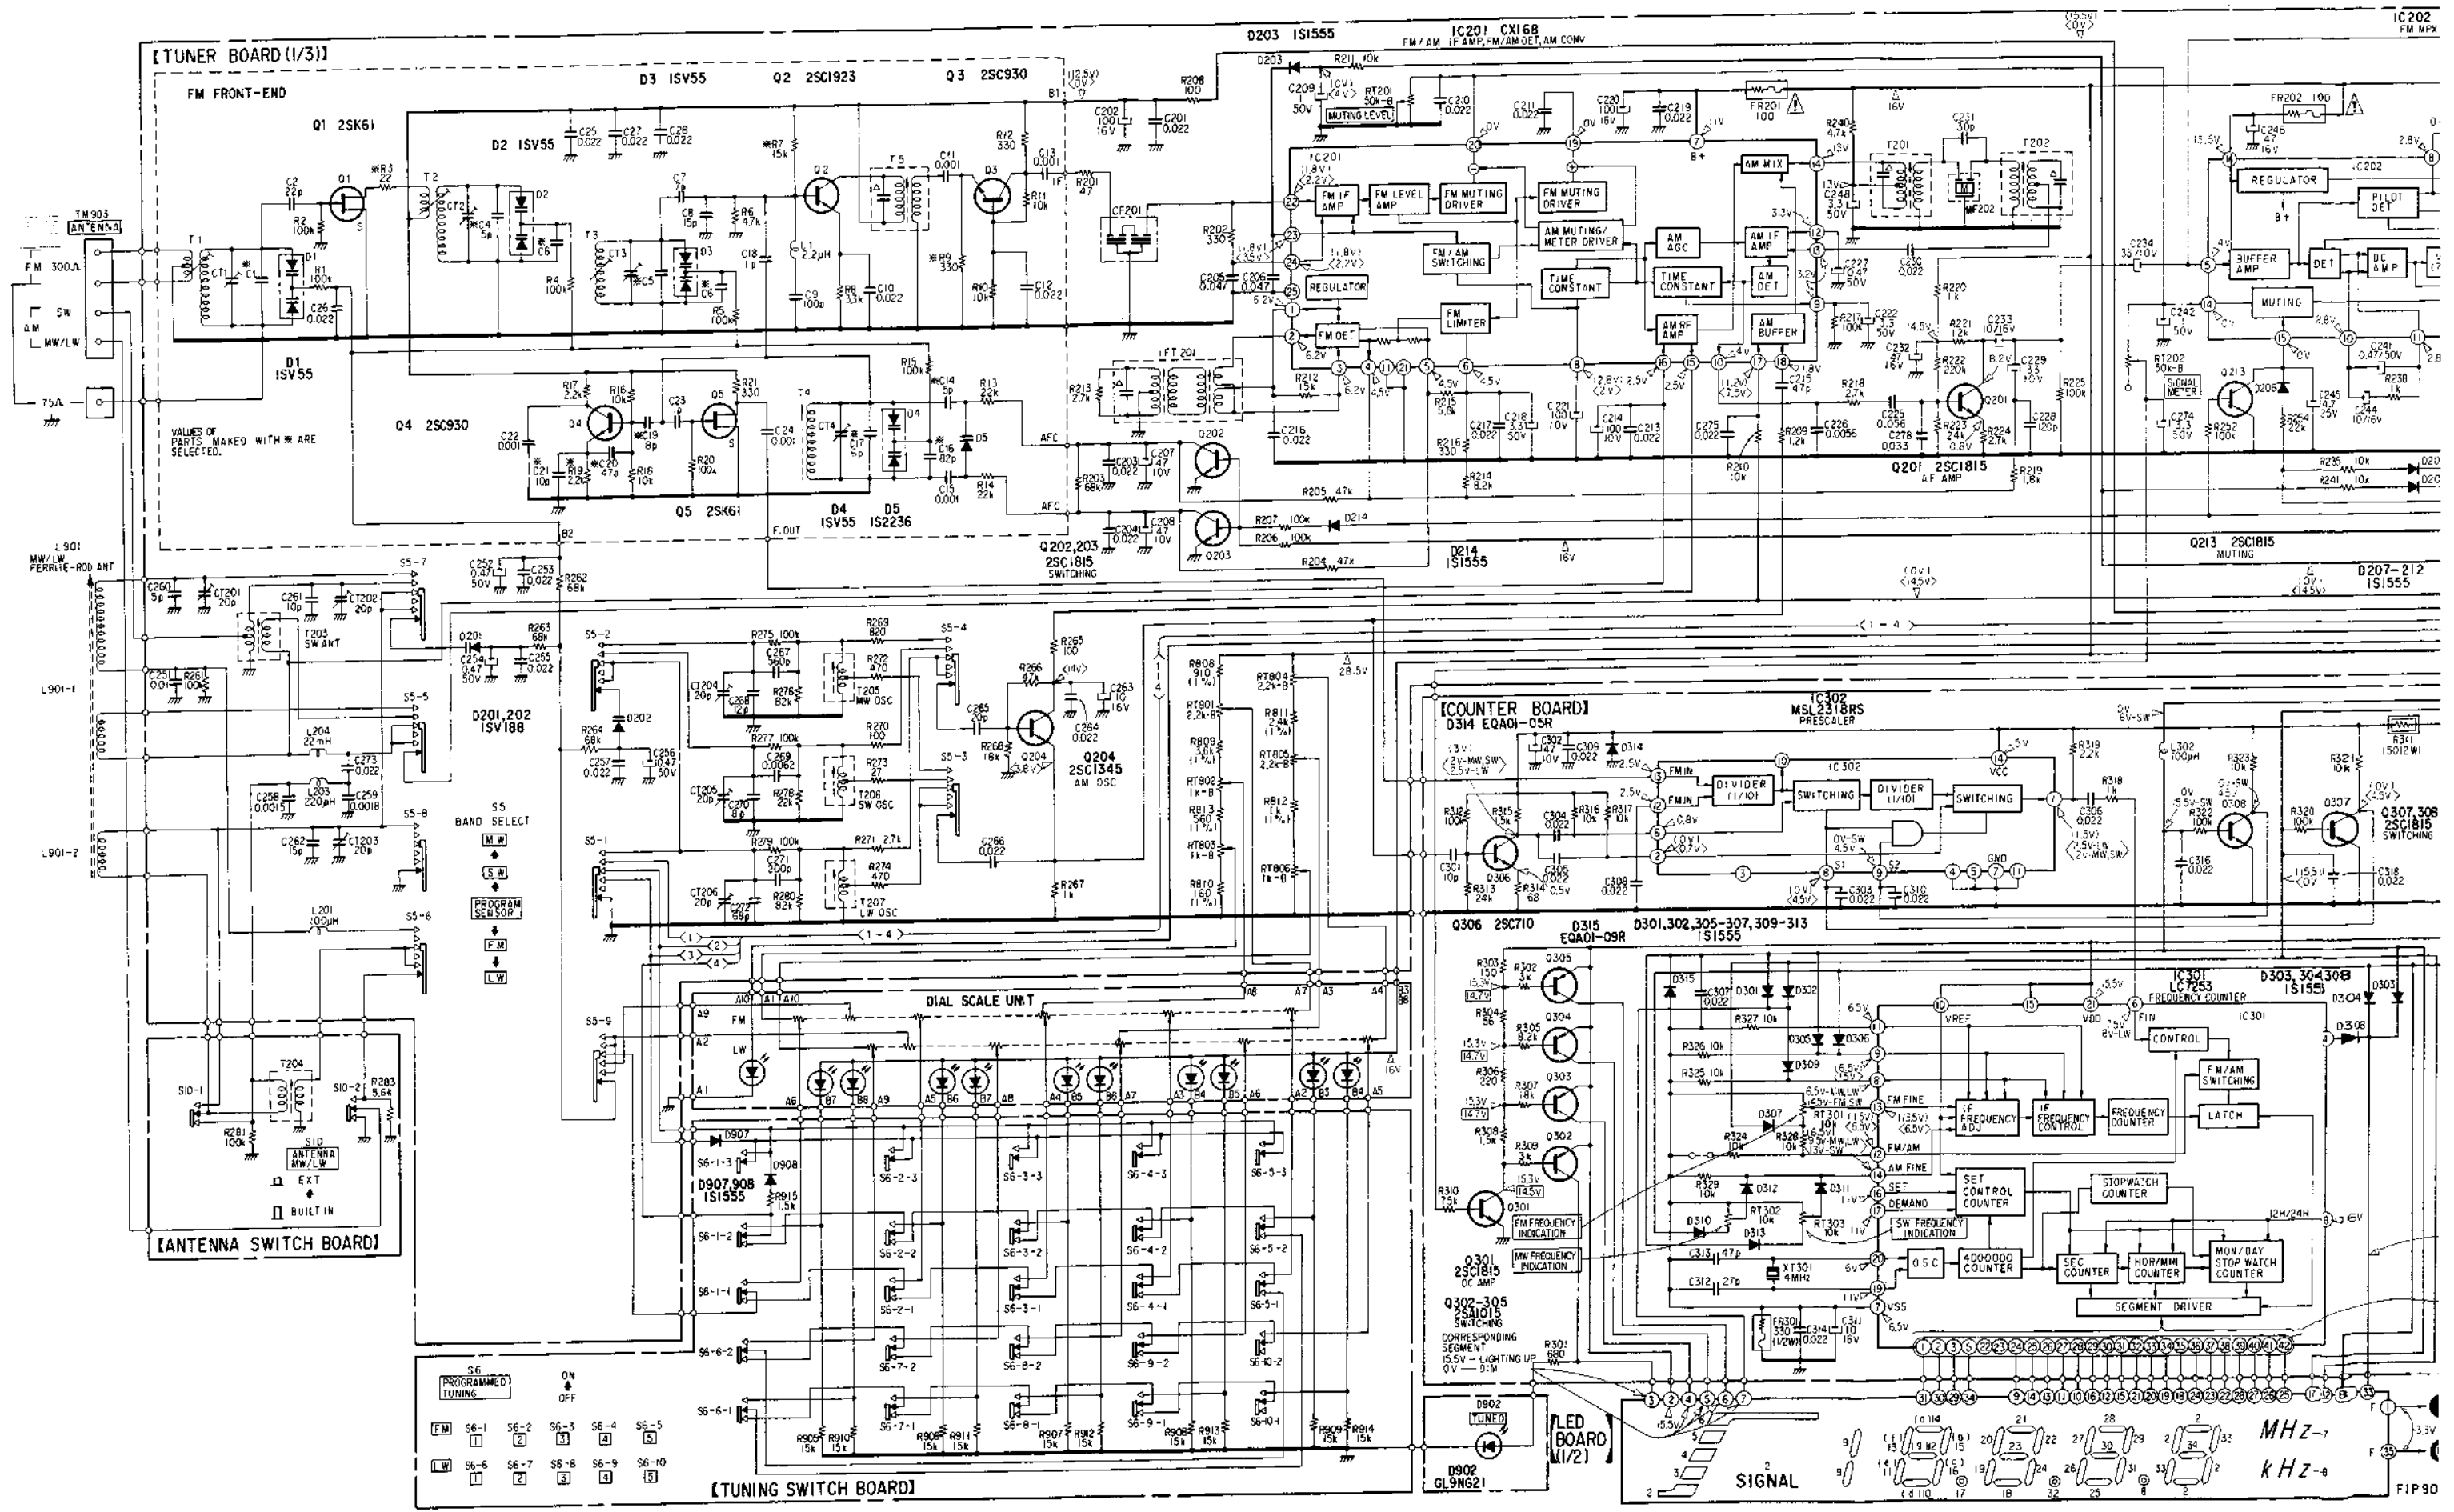


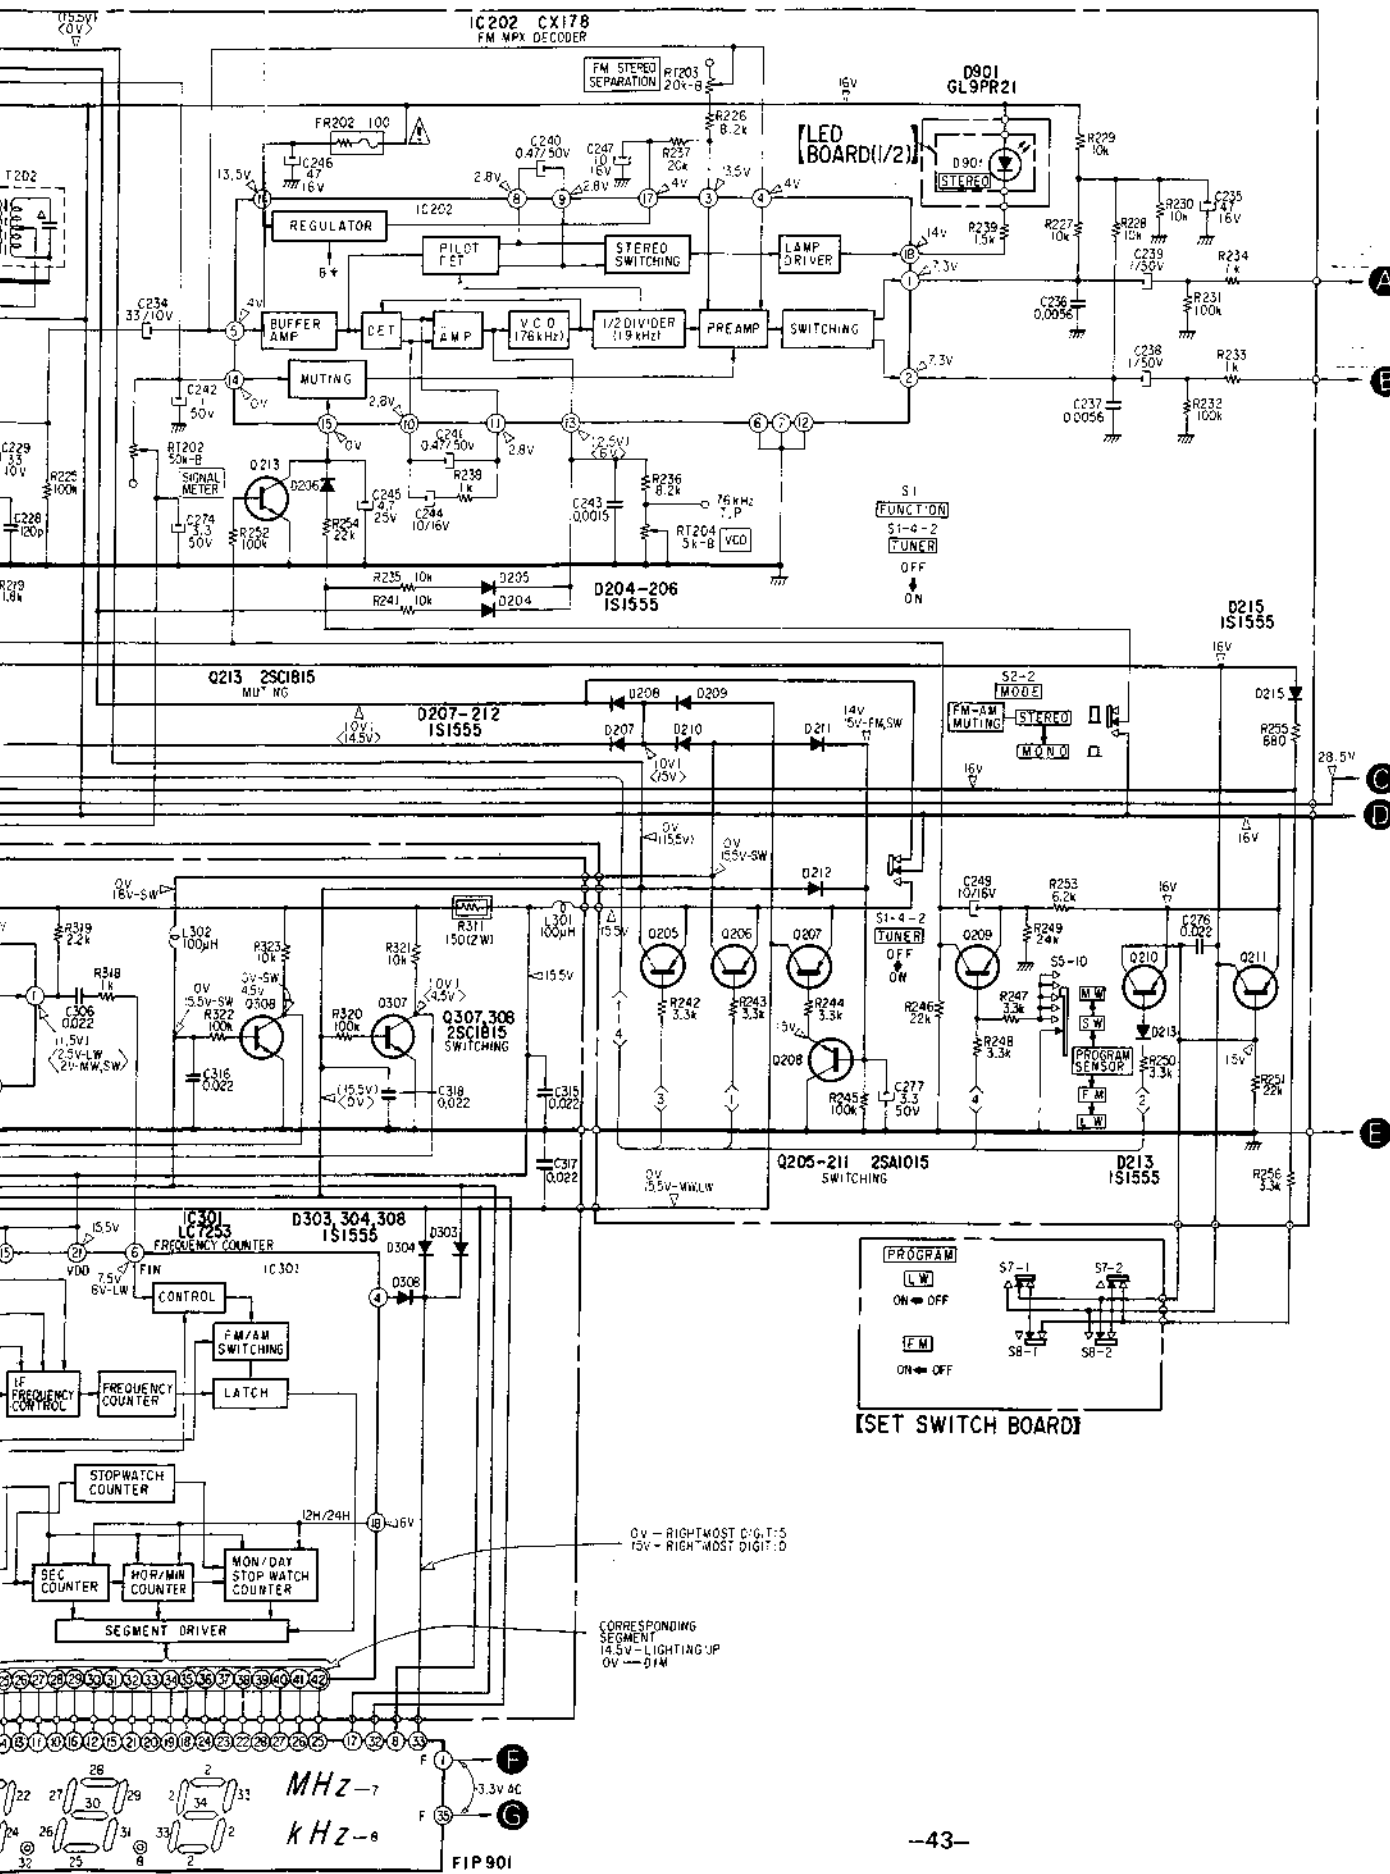

(FOR MOUNTING DIAGRAM)

Note:

- Color code of sleeving over the end of the jacket.



- : parts extracted from the component side.
- : parts extracted from the conductor side.
- : indicates side identified with part number.
- : part mounted on the conductor side.

- ▲ : nonflammable resistor.
- : B+ pattern

Note: The components identified by shading and mark are critical for safety. Replace only with part number specified.

- : Signal Path
- : R-CH signal path
- : L-CH signal path


(FOR SCHEMATIC DIAGRAM)


Note:

- All capacitors are in  $\mu F$  unless otherwise noted. pF :  $\mu\mu F$
- 50WV or less are not indicated except for electrolytics and tantalum.
- All resistors are in ohms,  $\frac{1}{4}W$  unless otherwise noted. k $\Omega$  : 1000 $\Omega$ , M $\Omega$  : 1000k $\Omega$
- : nonflammable resistor.
- : fusible resistor.
- : internal component.
- : panel designation.
- : adjustment for repair.
- : B+ bus.
- : B- bus.
- Voltages are dc with respect to ground unless otherwise noted.
- Readings are taken under detuned conditions with a VOM/20k $\Omega/V$ .
- : FM
- : SET IS TUNED.
- : AM
- Voltage variations may be noted due to normal production tolerances.
- Switch

Ref. No.	Switch	Position
S1	FUNCTION	
S1-1	PHONO	ON
S1-2	TAPE 1	OFF
S1-3	TAPE 2	OFF
S1-4	TUNER	OFF
S2	MODE	STEREO, FM-AM MUTING
S3	HI FILTER	OFF
S4	LOUDNESS	OFF
S5	Band Select	PROGRAM SENSOR
S6	PROGRAMMED TUNING	FM
S7	PROGRAM (LW)	OFF
S8	PROGRAM (FM)	OFF
S9	SPEAKERS (POWER)	POWER OFF
S10	ANTENNA	BUILT IN

STR-434L STR-434L

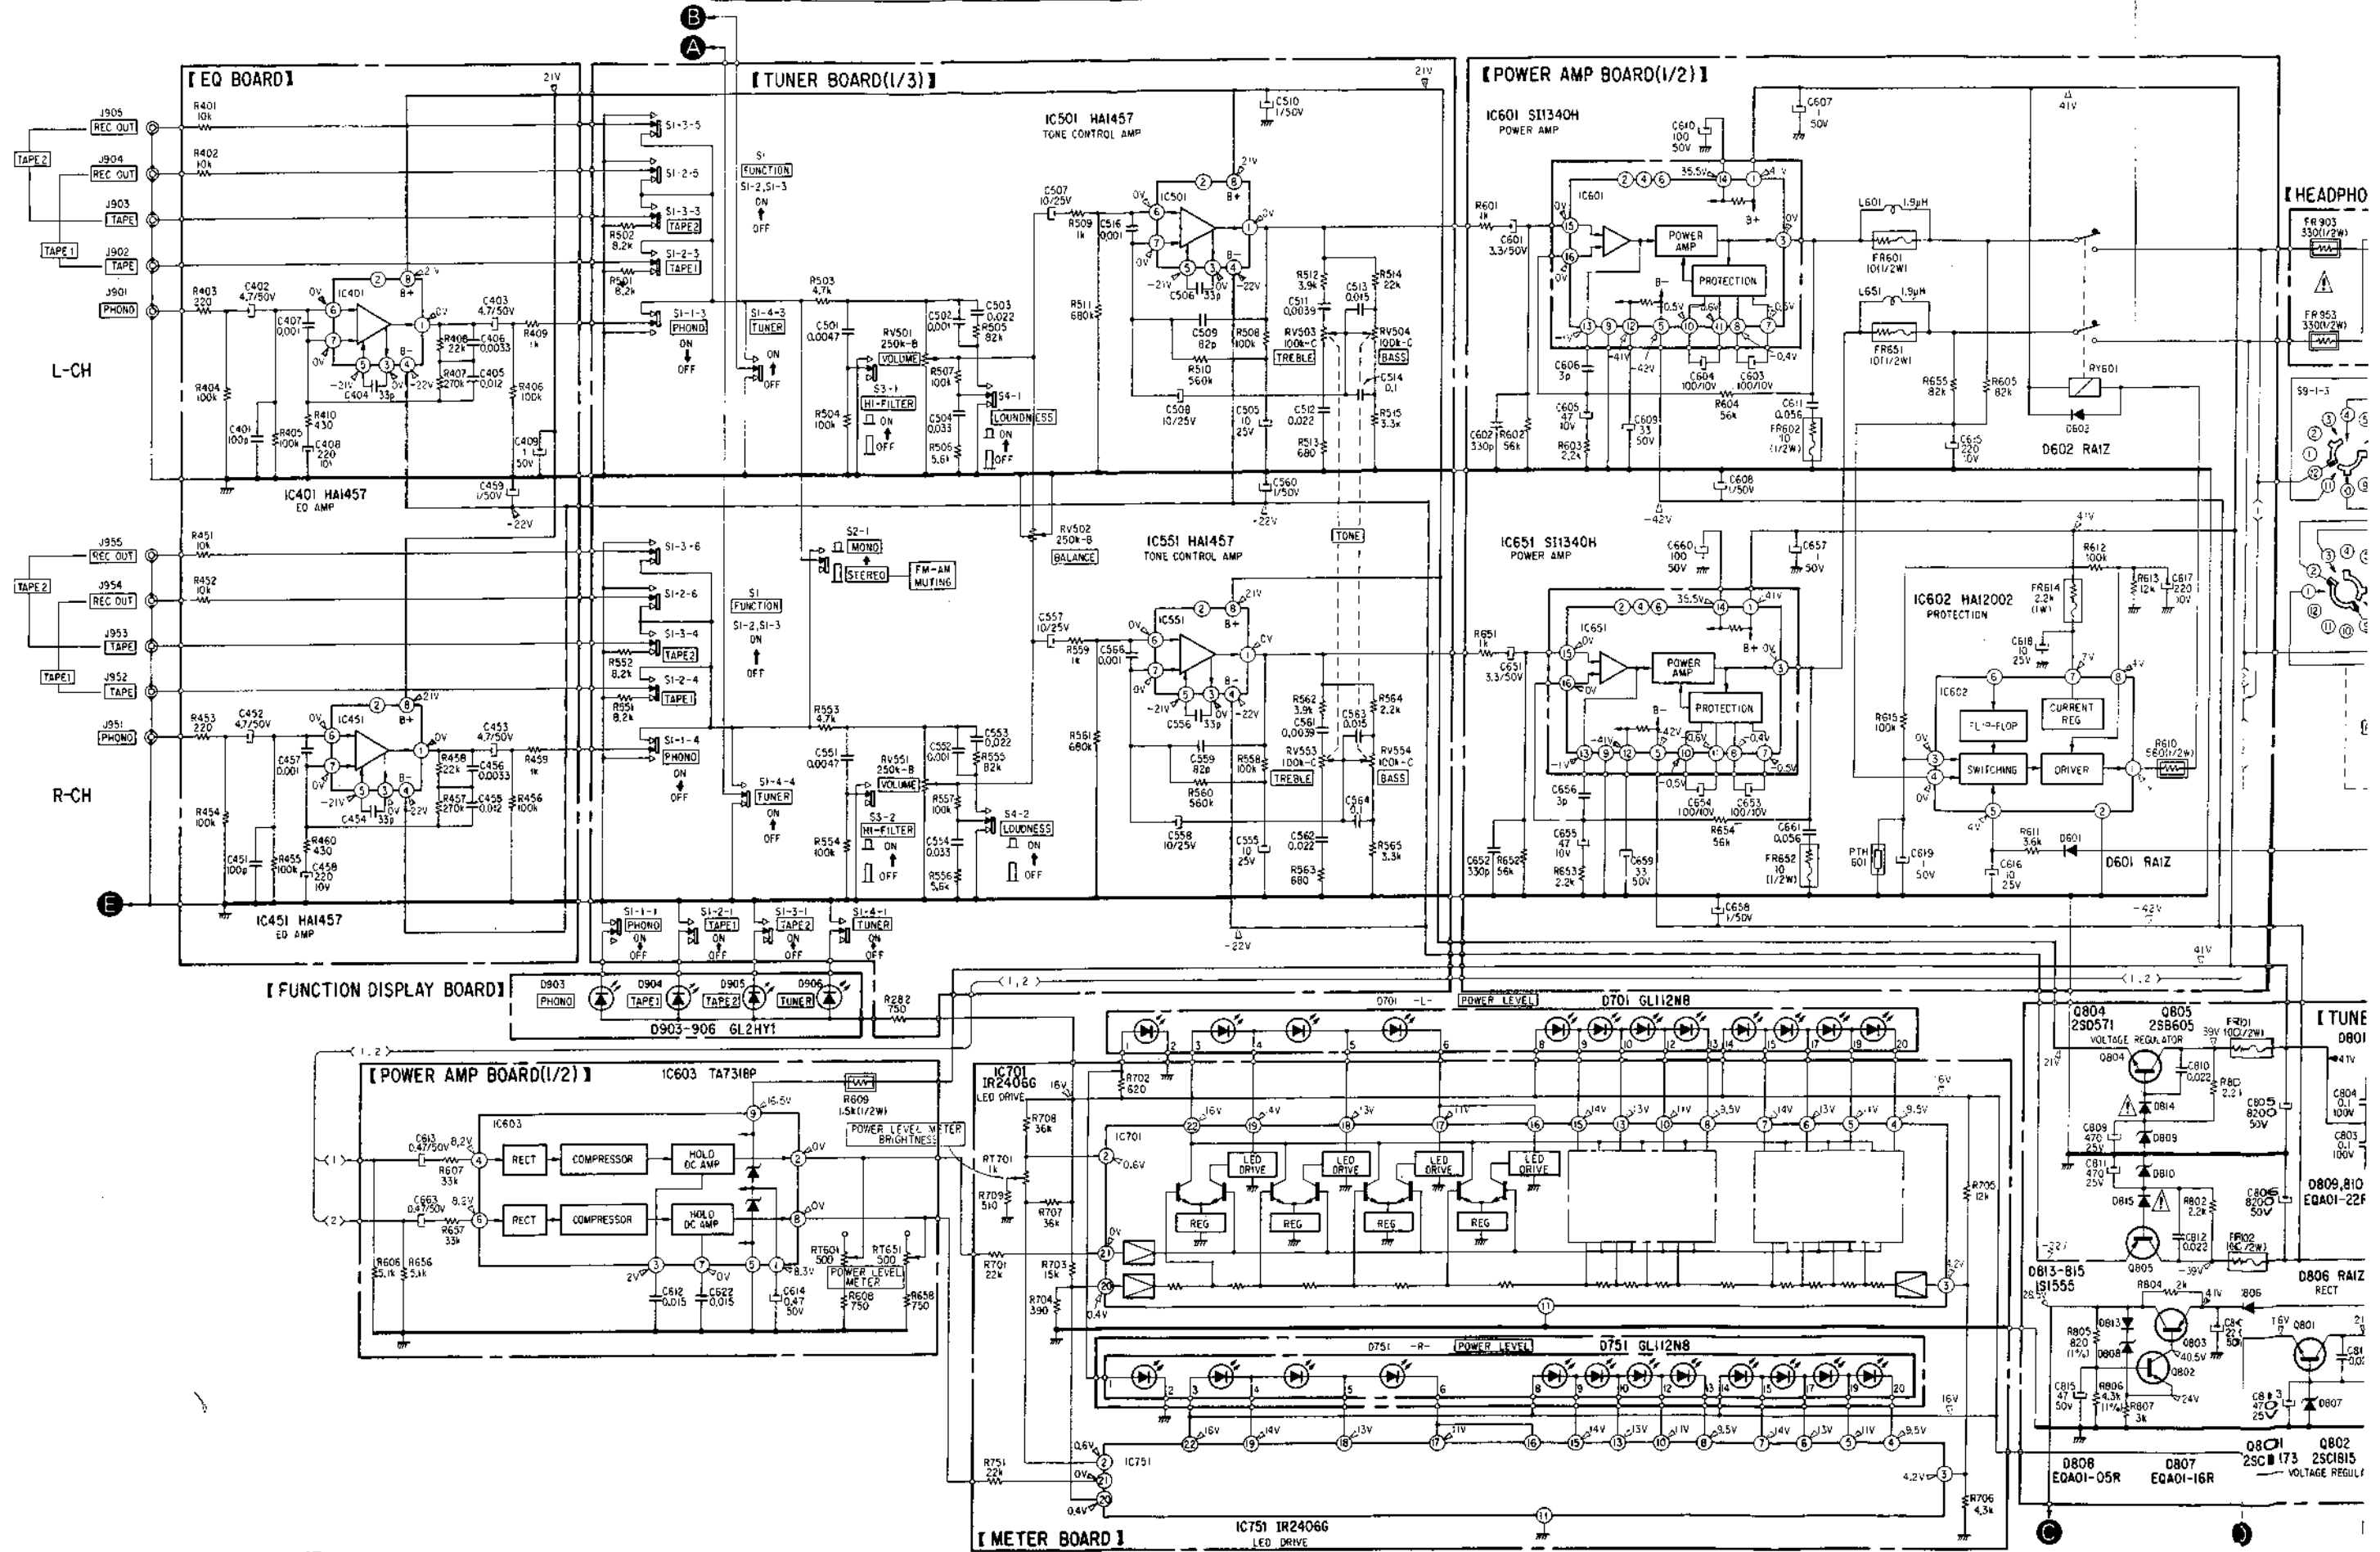


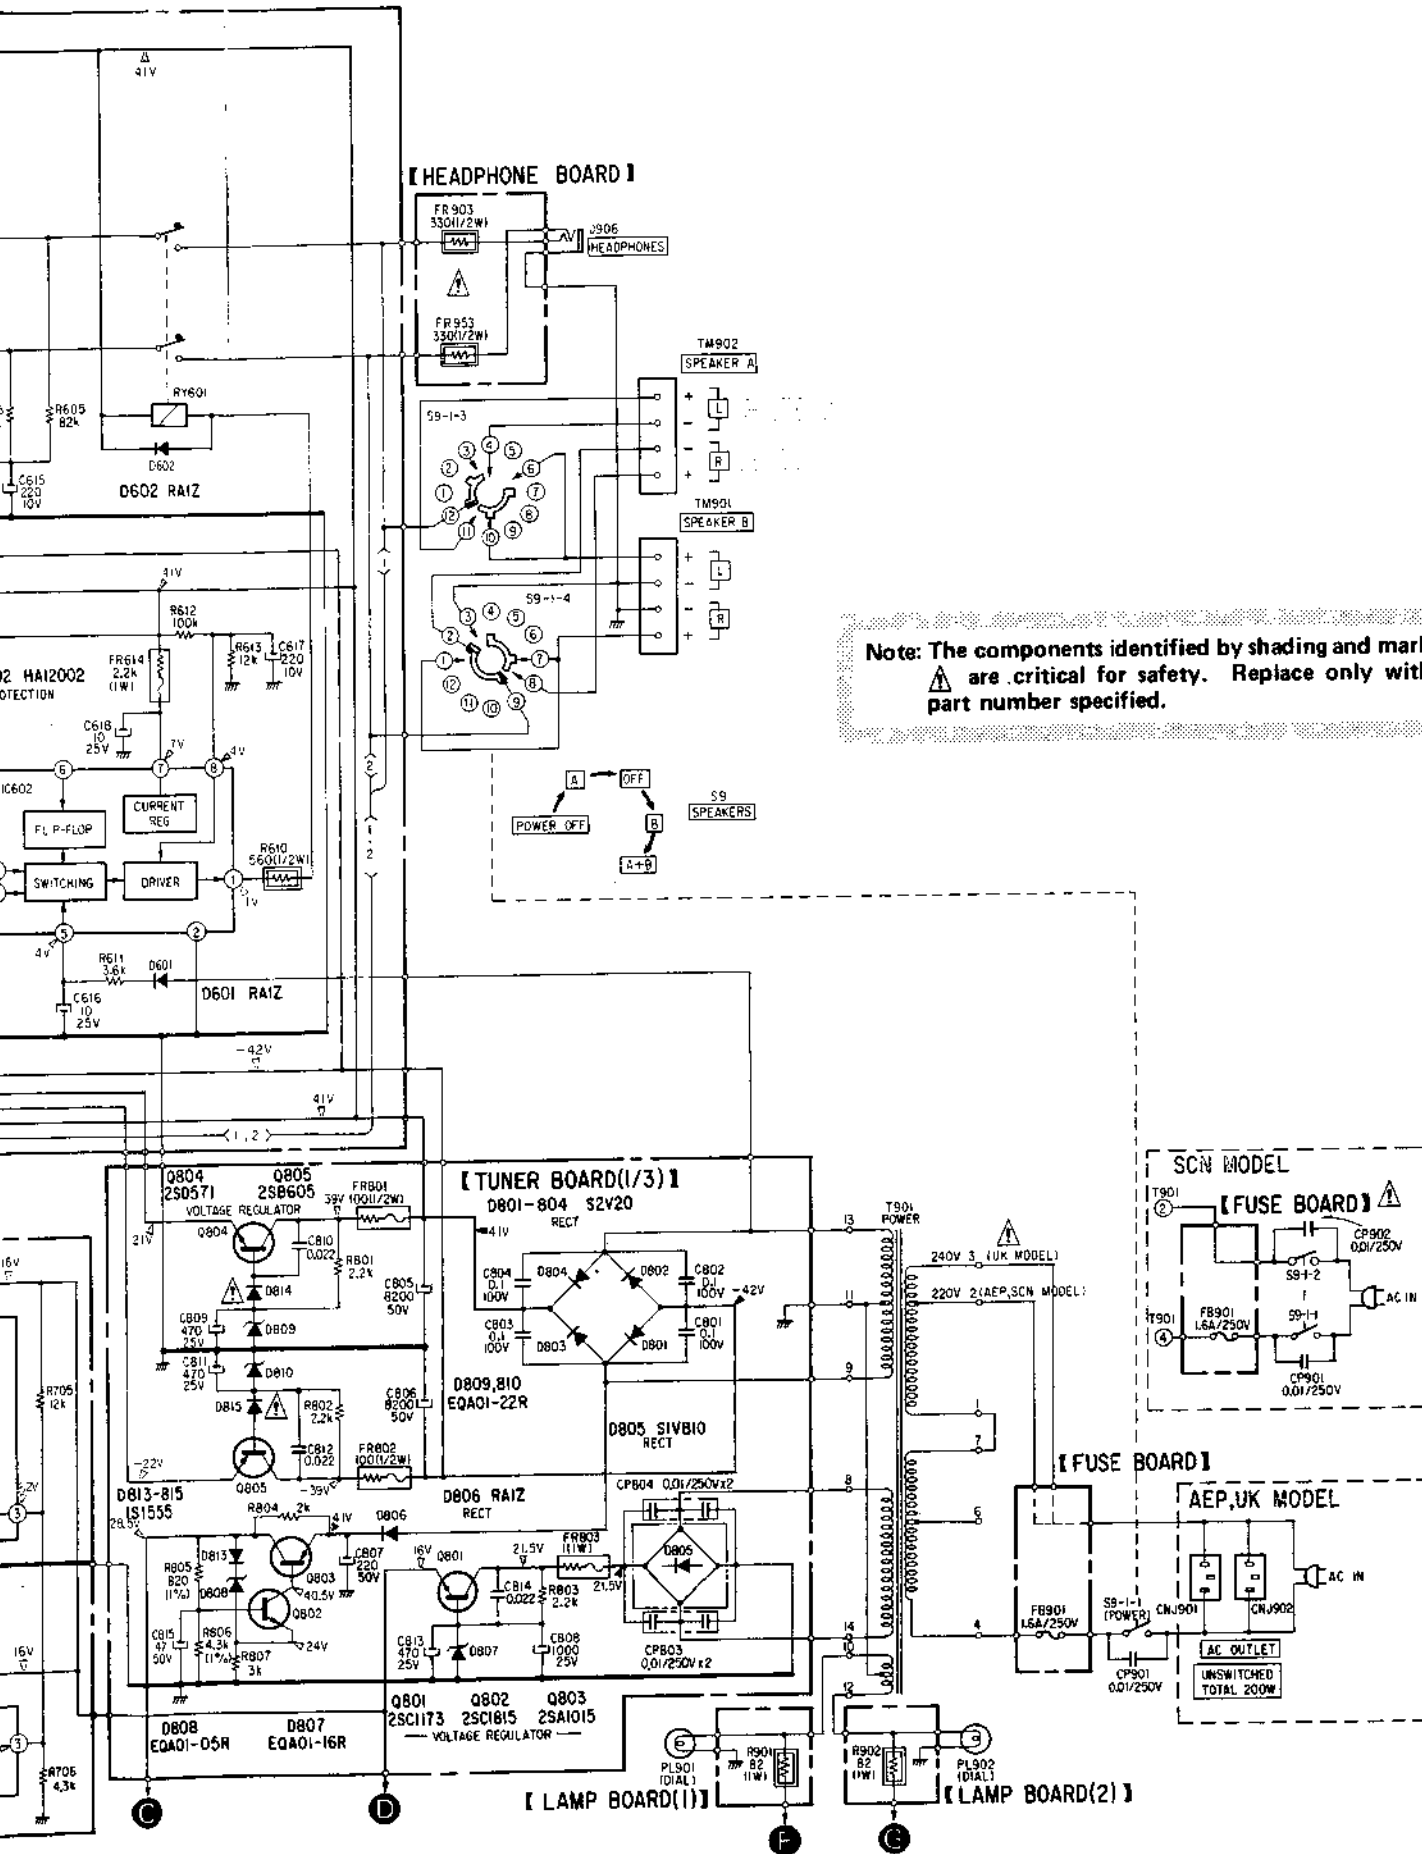


Note: The components identified by shading and mark  $\Delta$  are critical for safety. Replace only with part number specified.

Note:

- All capacitors are in  $\mu\text{F}$  unless otherwise noted.  $\text{pF}$  :  $\mu\text{pF}$   
50WV or less are not indicated except for electrolytics and tantalum.
- All resistors are in ohms,  $\frac{1}{4}\text{W}$  unless otherwise noted.  
 $\text{k}\Omega$  : 1000 $\Omega$ ,  $\text{M}\Omega$  : 1000 $\text{k}\Omega$
- $\square$  : nonflammable resistor.
- $\square$  : fusible resistor.
- $\Delta$  : internal component.
- $\square$  : panel designation.
- $\square$  : adjustment for repair.
- $\circ$  : B+ bus.
- $\circ$  : B- bus.
- Voltages are dc with respect to ground unless otherwise noted.
- Readings are taken under detuned conditions with a VOM (20 $\text{k}\Omega/\text{V}$ ).  
( ) : FM  
 $\square$  : SET IS TUNED.  
< > : AM
- Voltage variations may be noted due to normal production tolerances.
- Switch

Ref. No.	Switch	Position
S1	FUNCTION	
S1-1	PHONO	ON
S1-2	TAPE 1	OFF
S1-3	TAPE 2	OFF
S1-4	TUNER	OFF
S2	MODE	STEREO, FM -AM MUTING
S3	HI FILTER	OFF
S4	LOUDNESS	OFF
S5	Band Select	PROGRAM SENSOR
S6	PROGRAMMED TUNING	FM $\square$
S7	PROGRAM (LW)	OFF
S8	PROGRAM (FM)	OFF
S9	SPEAKERS (POWER)	POWER OFF
S10	ANTENNA	BUILT IN

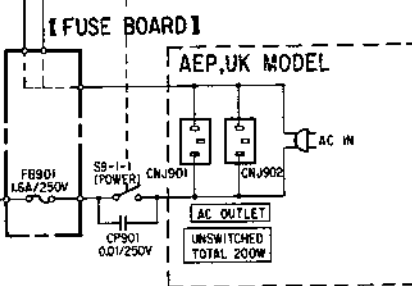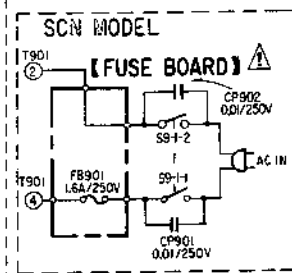

# SECTION 5 EXPLODED VIEWS

# STR-434L

A

B

C

D

(1)

**Note:**

- Items with no part number and/or no description are not stocked because they are seldom required for routine service.
- All screws are Phillips (cross recess) type unless otherwise noted.  
I- = slotted head
- Circled letters (A) to (Z) are applicable to European models only.

X-4864-406-2 (N)  
Front Panel Ass'y; including parts marked ▲ 1, 2

Label, MADE IN JAPAN (UK model)

▲ 1  
4-864-330-00 (B)  
Holder (L), panel

BVTT 3x6

BVTT 3x6

X-4864-401-1 (C)  
Knob Ass'y; SPEAKERS, TONE

X-4864-403-0 (D) Knob Ass'y, VOL

X-4864-404-0 (D) Knob Ass'y, BAL

X-4864-401-2 (C) Knob Ass'y, BAND SELECT

X-4864-402-0 (D) Knob Ass'y, TUNING

Printed Circuit Board, function display

1-226-231-00 (D) Resistor, variable 100k $\Omega$ /100k $\Omega$ -C; BASS, TREBLE (RV503, 504, RV553, 554)

4-864-307-00 (A) Ring, flexible

Bracket, switch

Supplied with variable resistor

4-864-328-00 (B) Knob; FUNCTION, LOUDNESS, HI-FILTER, MODE

Supplied with variable resistor

BVTT 3x6

Supplied with switch

1-226-339-00 (C) Resistor, variable 250k/250k/250k $\Omega$ ; VOL, BAL (RV501, 502, 551)

1-553-062-00 (D) Switch, pushbutton; MODE/ HI-FILTER/LOUDNESS (S2, 3, 4)

3-701-589-00 (A) P3x8

1-463-289-00 (M) Front End


Complete Circuit Board, tuner


1-553-066-00 (F) Switch, rotary-slide; BAND SELECT (S5)

1-553-063-00 (G) Switch, pushbutton; FUNCTION (S1)

4-864-457-00 (I) Case

4-864-419-12 (B) Adiabatic Sheet

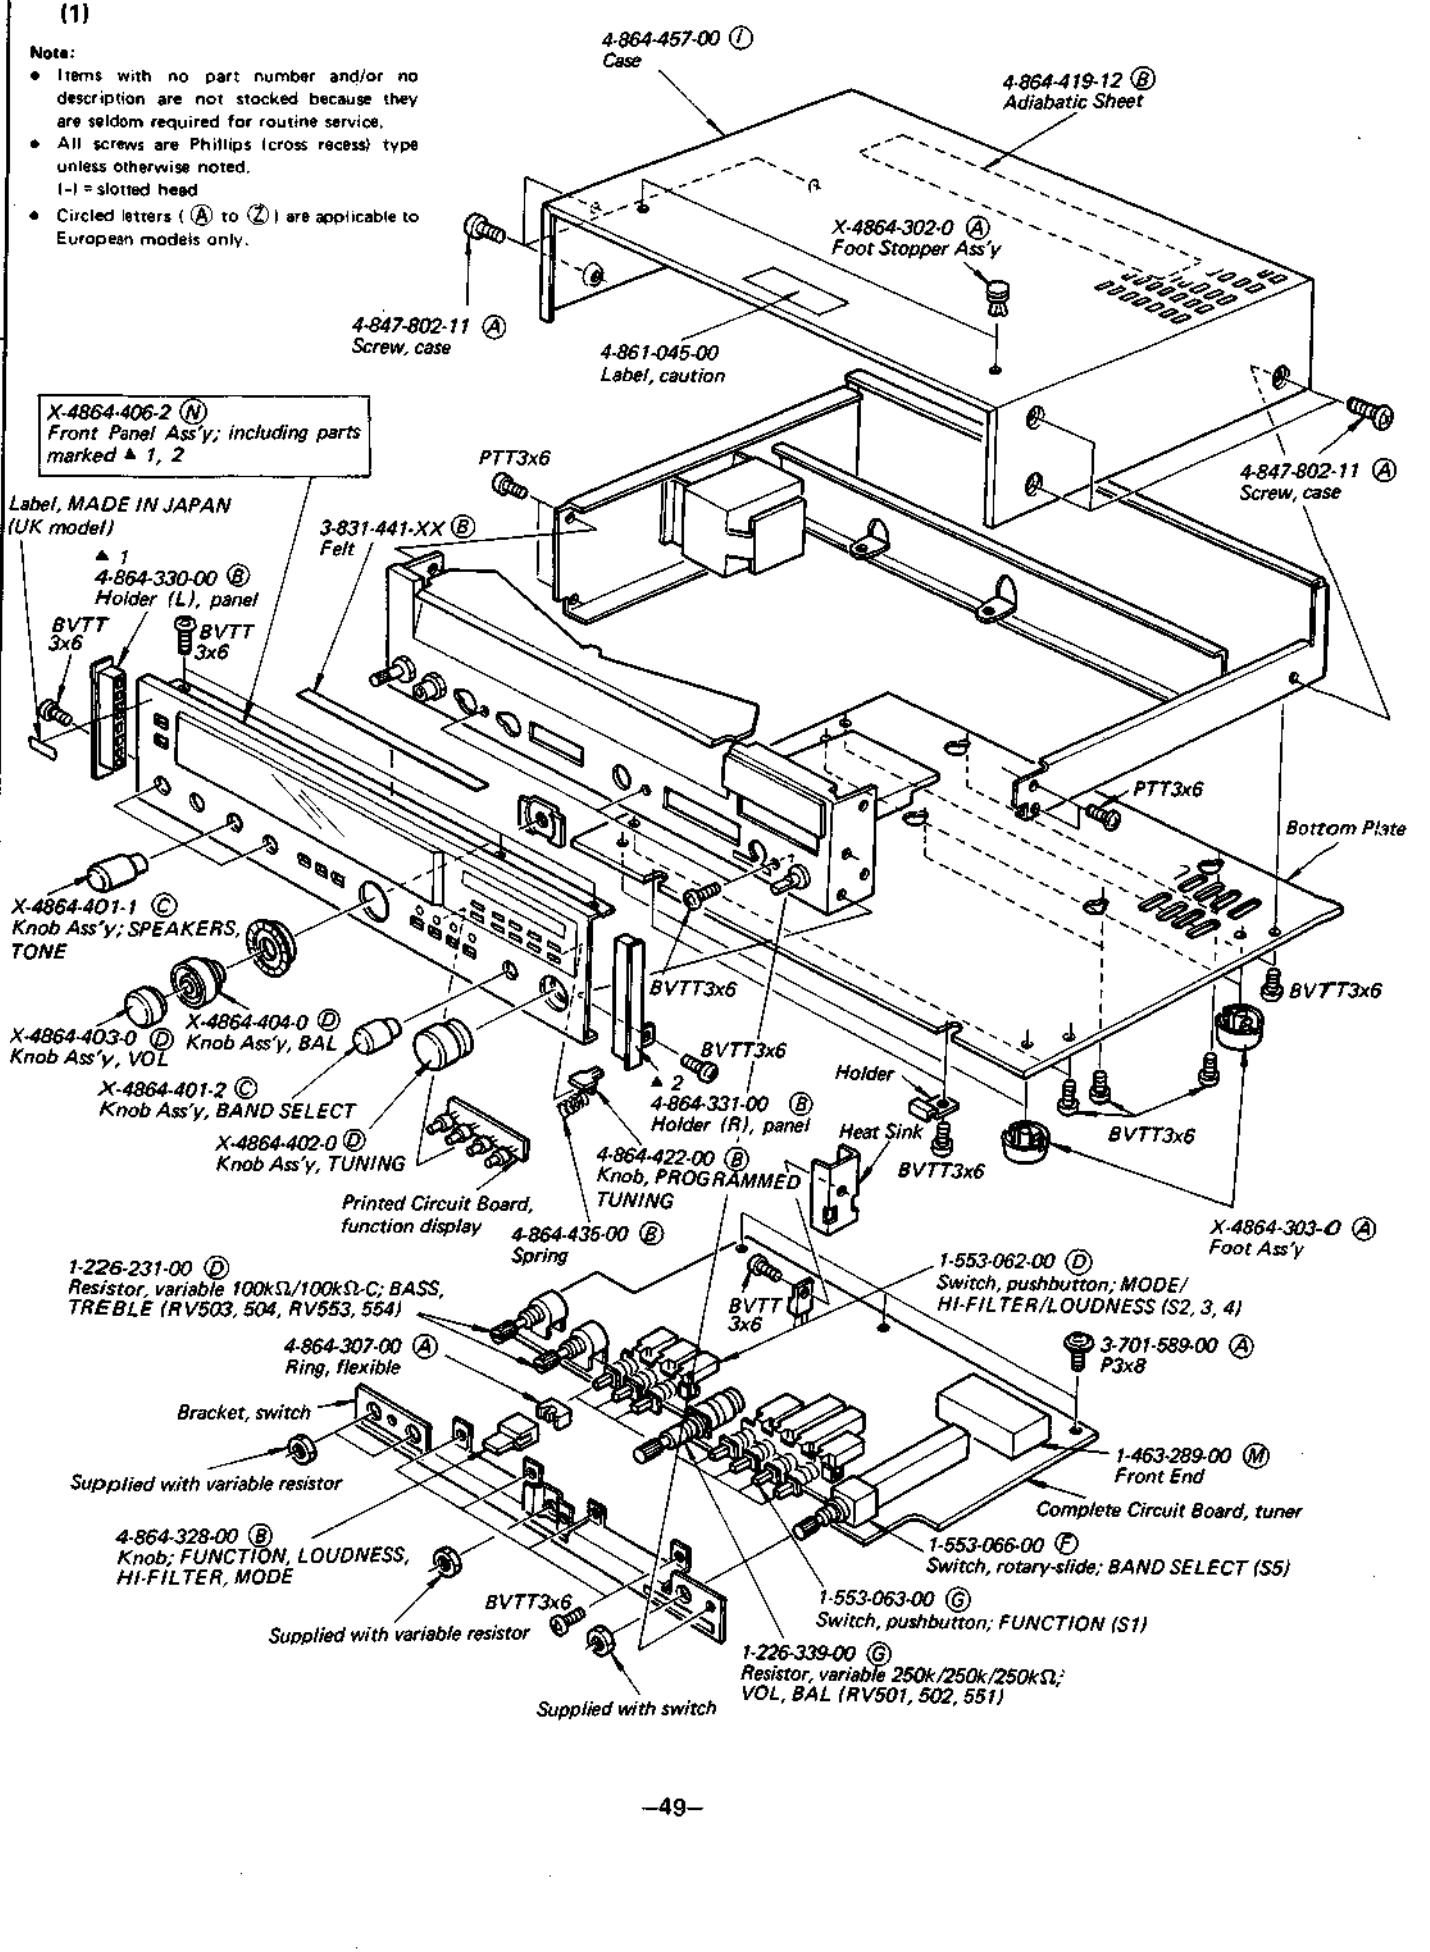

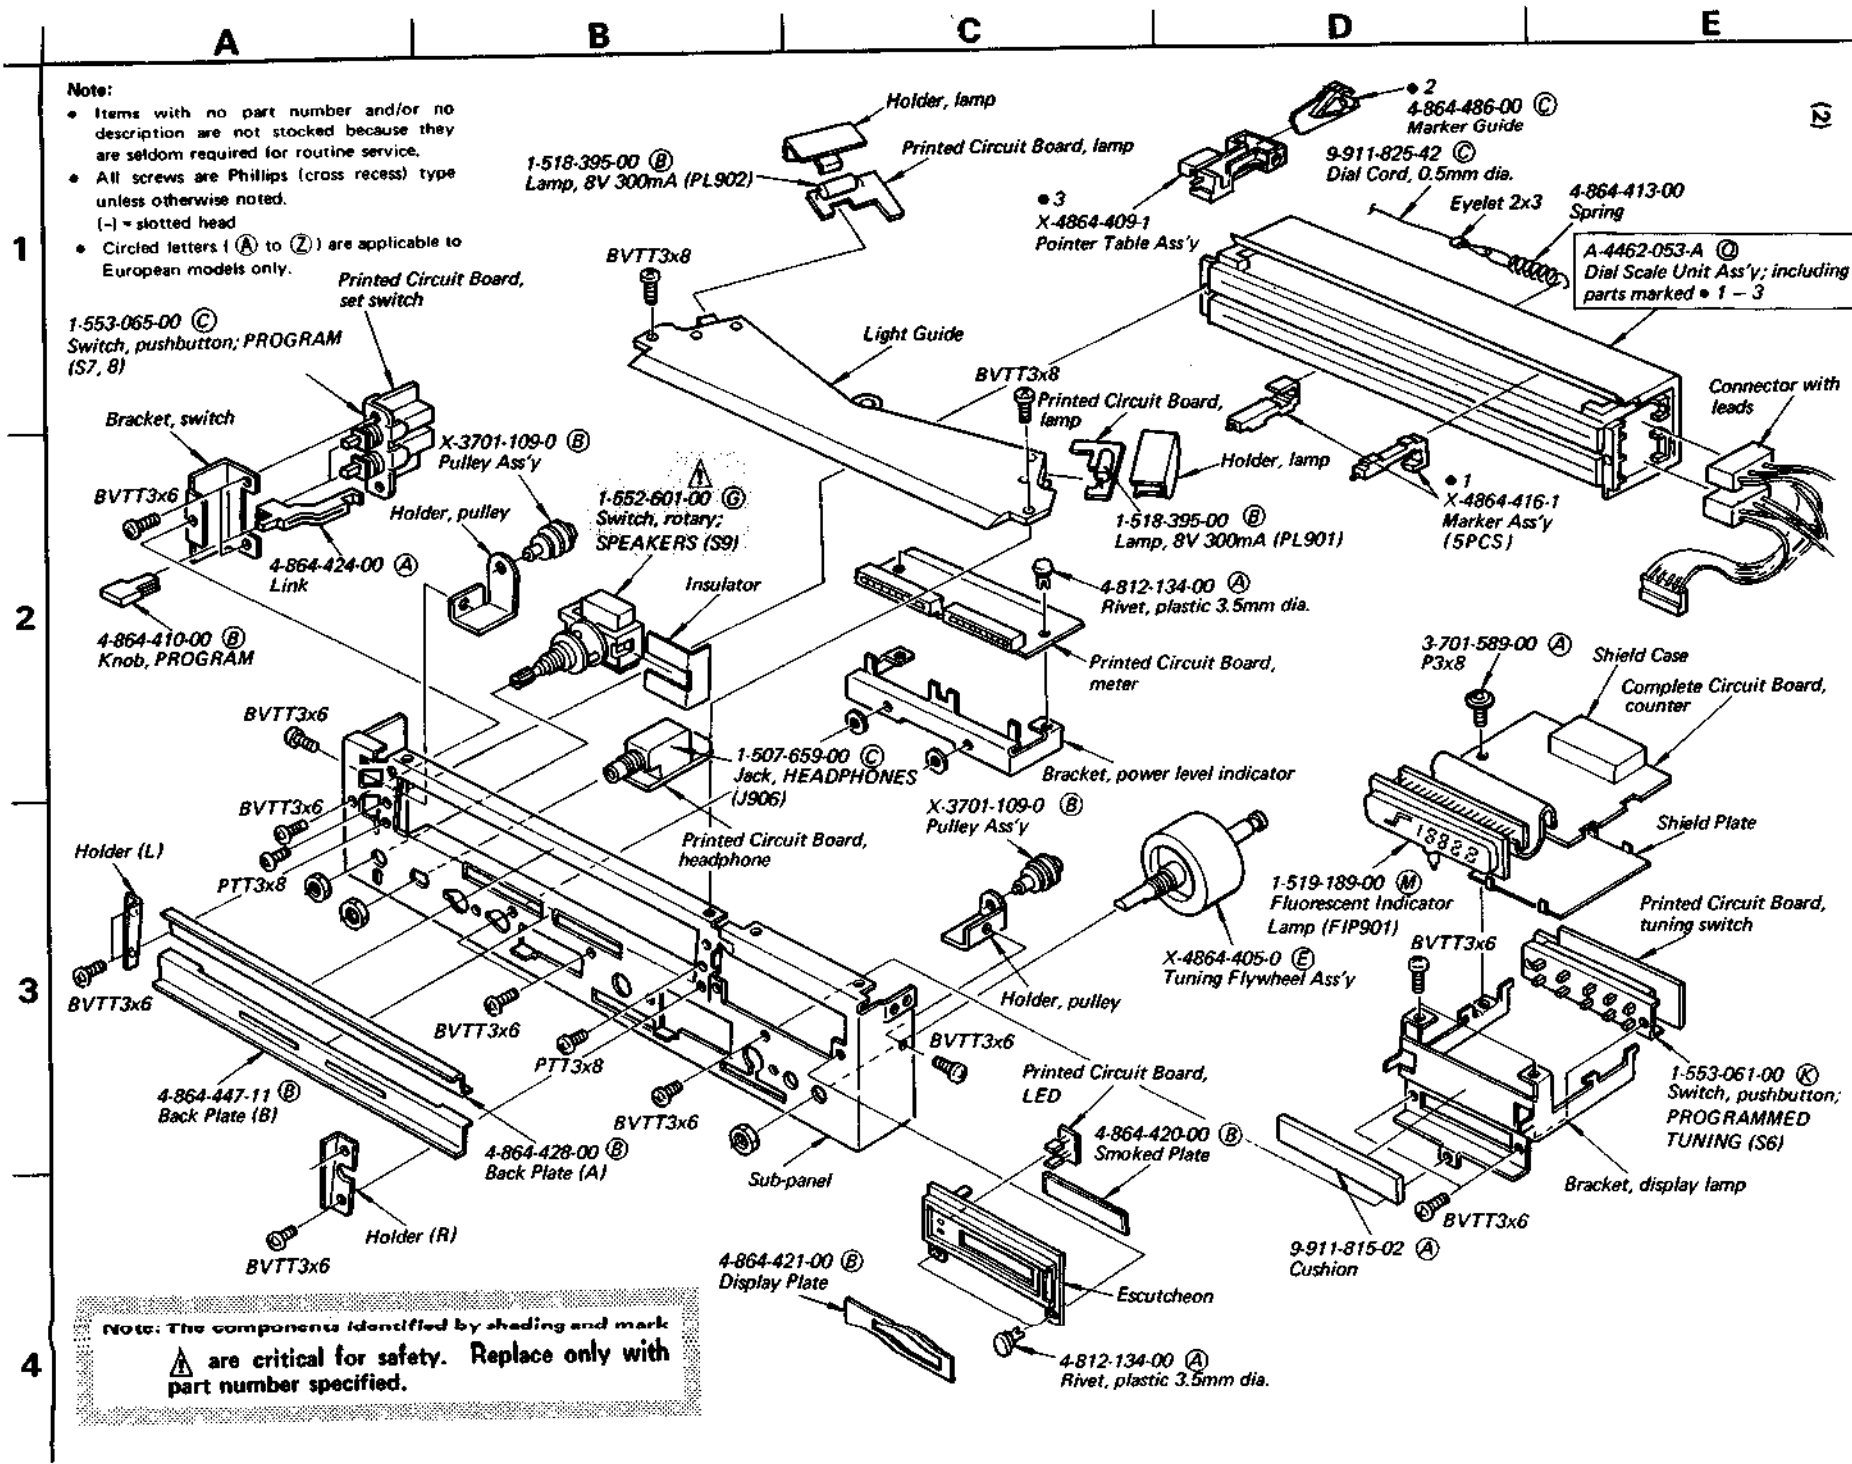

**Note:**

- Items with no part number and/or no description are not stocked because they are seldom required for routine service.
- All screws are Phillips (cross recess) type unless otherwise noted.
- (-) = slotted head
- Circled letters (A) to (Z) are applicable to European models only.

1-553-065-00 (C)  
Switch, pushbutton; PROGRAM (S7, B)

4-864-410-00 (B)  
Knob, PROGRAM

4-864-447-11 (B)  
Back Plate (B)

4-864-428-00 (B)  
Back Plate (A)

**Note:** The components identified by shading and mark **A** are critical for safety. Replace only with part number specified.

1-518-395-00 (B)  
Lamp, 8V 300mA (PL902)

BVTT3x8

1-552-601-00 (C)  
Switch, rotary; SPEAKERS (S9)

1-507-659-00 (C)  
Jack, HEADPHONES (J906)

4-864-421-00 (B)  
Display Plate

Holder, lamp

Printed Circuit Board, lamp

Light Guide

Printed Circuit Board, lamp

1-518-395-00 (B)  
Lamp, 8V 300mA (PL901)

4-812-134-00 (A)  
Rivet, plastic 3.5mm dia.

Printed Circuit Board, meter

Bracket, power level indicator

Printed Circuit Board, headphone

Holder, pulley

Printed Circuit Board, LED

4-864-420-00 (B)  
Smoked Plate

Escutcheon

4-812-134-00 (A)  
Rivet, plastic 3.5mm dia.

4-864-421-00 (B)  
Display Plate

Escutcheon

4-812-134-00 (A)  
Rivet, plastic 3.5mm dia.

2  
4-864-486-00 (C)  
Marker Guide

9-911-825-42 (C)  
Dial Cord, 0.5mm dia.

Eyelet 2x3

4-864-413-00  
Spring

1  
X-4864-416-1  
Marker Ass'y (5PCS)

Holder, lamp

1-518-395-00 (B)  
Lamp, 8V 300mA (PL901)

4-812-134-00 (A)  
Rivet, plastic 3.5mm dia.

Printed Circuit Board, meter

Bracket, power level indicator

Printed Circuit Board, headphone

Holder, pulley

Printed Circuit Board, LED

4-864-420-00 (B)  
Smoked Plate

Escutcheon

4-812-134-00 (A)  
Rivet, plastic 3.5mm dia.

4-864-421-00 (B)  
Display Plate

Escutcheon

4-812-134-00 (A)  
Rivet, plastic 3.5mm dia.

4-864-421-00 (B)  
Display Plate

Escutcheon

4-812-134-00 (A)  
Rivet, plastic 3.5mm dia.

4-864-421-00 (B)  
Display Plate

Escutcheon

3-701-589-00 (A)  
P3x8

Shield Case

Complete Circuit Board, counter

Shield Plate

Printed Circuit Board, tuning switch

1-519-189-00 (M)  
Fluorescent Indicator Lamp (FIP901)

X-4864-405-0 (E)  
Tuning Flywheel Ass'y

1-553-061-00 (K)  
Switch, pushbutton; PROGRAMMED TUNING (S6)

Bracket, display lamp

9-911-815-02 (A)  
Cushion

4-864-421-00 (B)  
Display Plate

Escutcheon

4-812-134-00 (A)  
Rivet, plastic 3.5mm dia.

4-864-421-00 (B)  
Display Plate

Escutcheon

A-4462-053-A (C)  
Dial Scale Unit Ass'y; including parts marked • 1 - 3


Connector with leads

(2)



SECTION 6  
ELECTRICAL PARTS LIST

Note: Circled letters (A) to (Z) are applicable to European models only.

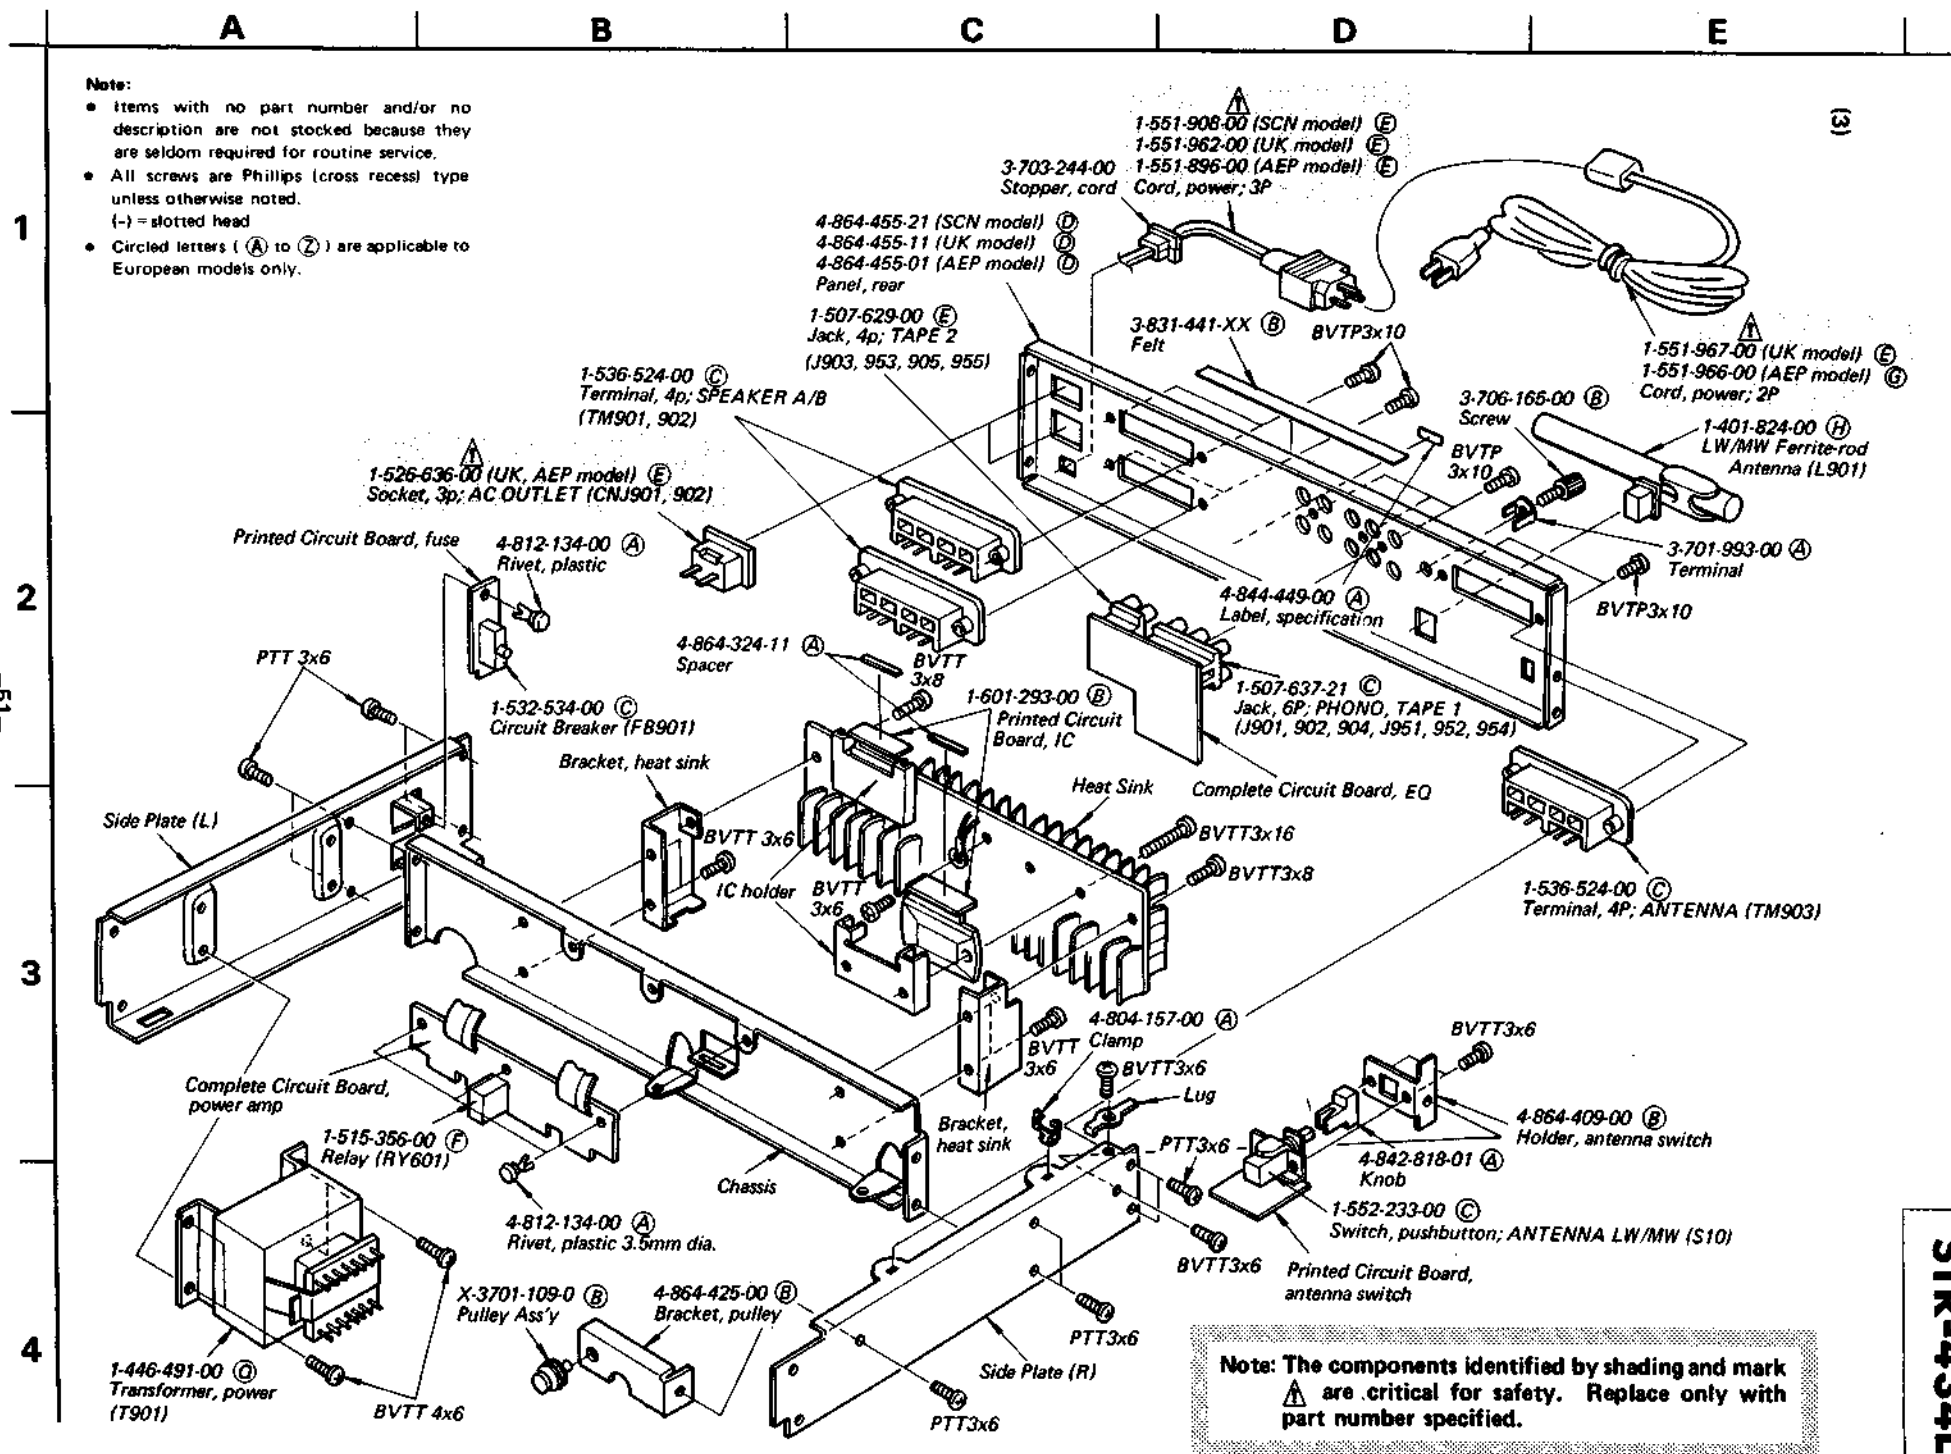

Note: The components identified by shading and mark **A** are critical for safety. Replace only with part number specified.

1  
2  
3  
4

**Note:**

- Items with no part number and/or no description are not stocked because they are seldom required for routine service.
- All screws are Phillips (cross recess) type unless otherwise noted.
- (-) = slotted head
- Circled letters (A) to (Z) are applicable to European models only.

Due to standardization, interchangeable replacements may be substituted for parts specified in the diagrams.

Ref. No.	Part No.	Description
<b>SEMICONDUCTORS</b>		
<b>Transistors</b>		
Q201-203	8-729-663-47	28C1364
Q204	8-729-334-58	28C1345
Q205-211	8-729-201-52	28A1015
Q213	8-729-663-47	28C1364
Q301	8-729-663-47	28C1364
Q302-305	8-729-201-52	28A1015
Q306	8-729-671-15	28C710-15
Q307, 308	8-729-663-47	28C1364
Q801	8-729-217-33	28C1173
Q802	8-729-663-47	28C1364
Q803	8-729-201-52	28A1015
Q804	8-760-413-10	28C1475
Q805	8-729-160-51	28B605
<b>ICs</b>		
IC201	8-751-680-01	CX168
IC202	8-751-780-00	CX178
IC301	8-759-872-53	LC7253
IC302	8-759-923-18	MSL2318RS
IC401, 451	8-759-314-57	HA1457
IC501, 551	8-759-314-57	HA1457
IC601, 651	8-759-313-40	SI1340H
IC602	8-759-320-02	HA12002
IC603	8-759-273-18	TA7318P
IC701, 751	8-759-924-07	IR2406G
<b>Diodes</b>		
D201, 202	8-719-100-81	1SV118
D203-215	8-719-815-55	1S1555
D301-313	8-719-815-55	1S1555
D314	8-719-931-05	EQB01-05
D315	8-719-931-09	EQB01-09
<b>TRANSFORMERS</b>		
L204	1-407-210-XX	22mH, microinductor
L301	1-407-750-00	100μH, microinductor
L302	1-407-169-XX	100μH, microinductor
L901	1-401-824-00	LW/MW Ferrite-rod Antenna
T201	1-409-323-00	Filter
T202	1-409-324-00	Filter
T203	1-401-822-00	SW ANT
T204	1-401-819-00	Antenna
T205	1-405-881-00	MW Osc
T206	1-405-885-00	SW Osc
T207	1-405-882-00	LW Osc
T901	1-446-491-00	Transformer, power
IFT201	1-404-167-00	FM Discriminator

Note: The components identified by shading and mark **A** are critical for safety. Replace only with part number specified.

Note: Circled letters (A) to (Z) are applicable to European models only.

Note: Circled letters (A) to (Z) are applicable to European models only.

Ref. No. Part No. Description

CAPACITORS

All capacitors are in  $\mu$ F and ceramic unless otherwise noted. 50WV or less are not indicated except for electrolytics. Common capacitors are omitted. Refer to the lists on pages 55 and 56 for their part numbers.

C243	1-104-081-00	(B) 0.0015	polystyrol
C267	1-103-719-00	(B) 560p	polystyrol
C269	1-103-744-00	(B) 0.0062	polystyrol
C271	1-103-708-00	(B) 200p	polystyrol
C801-804	(A) 1-108-389-00	(B) 0.1 100V	mylar elect
C805, 806	(A) 1-125-204-00	(B) 8200 50V	elect
C807	(A) 1-123-361-00	(B) 220 50V	elect
CT201-206	1-141-171-XX	(B) Trimmer	

RESISTORS

All resistors are in ohms. Common 1/4W carbon resistors are omitted. Refer to the list on page 55 for their part numbers.

R311	1-206-644-00	(B) 150	2W	metal oxide (nonflammable)
R609	1-247-244-00	(A) 1.5k	1/2W	(nonflammable)
R610	1-247-234-00	(A) 560	1/2W	(nonflammable)
R805	1-214-130-00	(A) 820	1/4W	metal oxide
R806	1-214-147-00	(A) 4.3k	1/4W	metal oxide
R808	1-214-131-00	(A) 910	1/4W	metal oxide
R809	1-214-145-00	(A) 3.6k	1/4W	metal oxide
R810	1-214-113-00	(A) 160	1/4W	metal oxide
R811	1-214-141-00	(A) 2.4k	1/4W	metal oxide
R812	1-214-132-00	(A) 1k	1/4W	metal oxide
R813	1-214-126-00	(A) 560	1/4W	metal oxide
R901, 902	1-213-130-00	(A) 82	1W	metal oxide (nonflammable)
R905-914	1-246-797-00	(A) 15k	1/8W	carbon
RT201, 202	1-226-238-00	(B) 50k, adjustable; MUTING LEVEL/ SIGNAL METER CALIBRATION		
RT203	1-226-237-00	(B) 20k, adjustable; FM STEREO SEPARATION		

Note: The components identified by shading and mark **A** are critical for safety. Replace only with part number specified.

Ref. No. Part No. Description

RT204	1-226-235-00	(B) 5k, adjustable; VCO
RT301-303	1-226-236-00	(B) 10k, adjustable; FM/MW/SW FREQUENCY INDICATION
RT601, 651	1-226-232-00	(B) 500, adjustable; POWER LEVEL METER CALIBRATION
RT701	1-226-233-00	(B) 1k, adjustable; POWER LEVEL METER BRIGHTNESS
RT801	1-224-250-XX	(B) 2.2k, adjustable
RT802, 803	1-224-249-XX	(B) 1k, adjustable
RT804, 805	1-224-250-XX	(B) 2.2k, adjustable
RT806	1-224-249-XX	(B) 1k, adjustable
RV501, 502	1-226-339-00	(G) 250k/250k/250k-B, variable; VOL/BAL
RV551		
RV503, 504	1-226-231-00	(D) 100k/100k, variable; BASS/TREBLE
RV553, 554		
FR201, 202	(A) 1-212-881-00	(B) 100 1/4W fusible
FR301	1-212-994-00	(A) 330 1/2W fusible
FR601, 602	1-212-958-00	(B) 10 1/4W fusible
FR651, 652		
FR614	1-213-147-00	(A) 2.2k 1W fusible
FR801, 802	(A) 1-212-982-00	(B) 100 1/4W fusible
FR803	(A) 1-213-036-00	(B) 1 1W fusible
FR903, 953	(A) 1-247-228-00	(A) 330 1/2W (nonflammable)

SWITCHES

S1	1-553-063-00	(G) Pushbutton, FUNCTION
S2, 3, 4	1-553-062-00	(D) Pushbutton, MODE/HI-FILTER/LOUDNESS
S5	1-553-066-00	(F) Rotary-slide, BAND SELECT
S6	1-553-061-00	(K) Pushbutton, PROGRAMMED TUNING
S7, 8	1-553-065-00	(C) Pushbutton, PROGRAM
S9	(A) 1-552-601-00	(G) Rotary, SPEAKERS
S10	1-552-233-00	(C) Pushbutton, ANTENNA

MISCELLANEOUS

CF201	1-527-534-93	(D) Filter
CNJ901, 902	(A) 1-526-636-00	(E) AC Outlet (AEP, UK model)
CP803, 804	(A) 1-102-394-00	(B) 0.01 + 0.01 $\mu$ F 250V ceramic
CP901	(A) 1-130-196-00	(D) 0.01 $\mu$ F
CP902	(A) 1-130-196-00	(D) 0.01 $\mu$ F (SCN model)

Ref. No. Part No. Description

FB901	(A) 1-532-534-00	(C) Circuit Breaker
FE	1-463-289-00	(M) Front End
FIP901	1-519-189-00	(M) Fluorescent Indicator Lamp
J901, 951	1-507-637-21	(C) Jack, 6P; PHONO TAPE 1
J902, 952		
J904, 954		
J903, 953	1-507-629-00	(E) Jack, 4P; TAPE 2
J905, 955		
J906	1-507-659-00	(C) Jack, HEADPHONES
MF202	1-527-403-00	(C) Mechanical Filter
PL901, 902	1-518-395-00	(B) Lamp, 8V 300mA
PTH601	1-800-427-00	(B) Thermistor, positive
RY601	1-515-356-00	(F) Relay
TM901-903	1-536-524-00	(C) Terminal, 4P; SPEAKER A/B, ANTENNA
XT301	1-527-533-00	(D) Crystal
	(A) 1-551-896-00	(E) Cord, power; 3P (AEP model)
	(A) 1-551-908-00	(E) Cord, power; 3P (SCN model)
	(A) 1-551-962-00	(E) Cord, power; 3P (UK model)
	(A) 1-551-966-00	(G) Cord, power; 2P (AEP model)
	(A) 1-551-967-00	(E) Cord, power; 2P (UK model)
	1-601-293-00	(B) Printed Circuit Board, IC

Note: The components identified by shading and mark **A** are critical for safety. Replace only with part number specified.

ACCESSORIES AND PACKING MATERIALS

Part No.	Description
1-501-184-00	(C) Feeder Antenna
1-501-193-00	(B) Antenna
3-701-630-00	(A) Bag, plastic
3-770-953-11	(F) Manual, instruction
4-809-251-00	(A) Bag, plastic
4-864-402-00	(B) Cushion, lower
4-864-403-00	(B) Cushion, upper left
4-864-404-00	(B) Cushion, upper right
4-864-463-00	(E) Carton

**ELECTROLYTIC CAPACITORS**

Note: Circled letter (A to Z) are applicable to European models only.

CAP. (μF)	RATING → Use the high voltage rated one.					
	6.3 VOLT.	10 VOLT.	16 VOLT.	25 VOLT.	35 VOLT.	50 VOLT.
	PART No.	PART No.	PART No.	PART No.	PART No.	PART No.
0.47						1-121-726-00 (A)
1.0						1-121-391-00 (A)
2.2						1-121-450-00 (A)
3.3	→	→	→	1-121-392-00 (A)	→	1-121-393-00 (A)
4.7	→	→	→	1-121-395-00 (A)	→	1-121-396-00 (A)
10	→	→	1-121-651-00 (A)	1-121-398-00 (A)	→	1-121-738-00 (A)
22	→	→	1-121-479-00 (A)	1-121-480-00 (A)	1-121-662-00 (A)	1-121-152-00 (A)
33	→	→	1-121-403-00 (A)	1-121-404-00 (A)	1-121-652-00 (B)	1-121-405-00 (A)
47	→	1-121-352-00 (A)	1-121-409-00 (A)	1-121-410-00 (A)	1-121-653-00 (B)	1-121-411-00 (A)
100	→	1-121-414-00 (A)	1-121-415-00 (A)	1-121-416-00 (A)	1-121-357-00 (B)	1-121-417-00 (B)
220	1-121-419-00 (B)	1-121-420-00 (B)	1-121-421-00 (A)	1-121-422-00 (B)	1-121-261-00 (C)	1-121-423-00 (B)
330	1-121-751-00 (B)	1-121-805-00 (B)	1-121-521-00 (C)	1-121-654-00 (A)	1-121-655-00 (D)	1-121-656-00 (A)
470	1-121-424-00 (B)	1-121-425-00 (C)	1-121-426-00 (C)	1-121-733-00 (B)	1-121-361-00 (E)	1-121-810-00 (D)
1000	-	1-121-736-00 (C)	1-121-245-00 (D)	1-121-657-00 (D)	1-121-388-00 (E)	1-123-061-00 (F)
2200	1-121-658-00 (B)	1-121-659-00 (C)	1-121-660-00 (D)	1-123-067-00 (F)	1-121-984-00 (F)	-
3300	1-121-661-00 (D)	1-123-075-00 (E)	1-123-071-00 (F)	-	-	-

CAP. (μF)	100 VOLT.	160 VOLT.	250 VOLT.	350 VOLT.
	PART No.	PART No.	PART No.	PART No.
0.47	-	-	-	-
1.0	1-123-249-00 (A)	1-123-252-00 (A)	1-123-003-00 (B)	1-121-168-00 (B)
2.2	1-123-250-00 (A)	1-123-026-00 (B)	-	1-123-028-00 (B)
3.3	1-121-995-00 (A)	-	1-123-004-00 (B)	1-123-006-00 (C)
4.7	1-123-255-00 (A)	1-121-246-00 (B)	1-121-759-00 (B)	1-123-007-00 (D)
10	1-121-126-00 (B)	1-121-999-00 (B)	1-123-254-00 (C)	1-123-008-00 (D)
22	1-121-996-00 (C)	1-123-253-00 (C)	1-123-005-00 (D)	1-123-022-00 (D)
33	1-121-997-00 (C)	1-121-757-00 (C)	-	-
47	1-123-251-00 (C)	1-121-919-00 (C)	-	-
100	1-123-084-00 (E)	-	-	-

**CERAMIC CAPACITORS (A)**

RATING							
CAP. (pF)	50 VOLT.	CAP. (pF)	50 VOLT.	CAP. (pF)	50 VOLT.	CAP. (μF)	50 VOLT.
	PART No.		PART No.		PART No.		PART No.
0.5	1-101-837-00	22	1-102-959-00	150	1-101-361-00	0.001	1-102-074-00
0.75	1-101-586-00	24	1-102-960-00	160	1-101-367-00	0.0012	1-102-118-00
1.0	1-102-934-00	27	1-102-961-00	180	1-102-976-00	0.0015	1-102-119-00
1.5	1-101-576-00	30	1-102-962-00	200	1-102-977-00	0.0018	1-102-120-00
2.0	1-102-935-00	33	1-102-963-00	220	1-102-978-00	0.0022	1-102-121-00
3	1-102-936-00	36	1-102-964-00	240	1-102-979-00	0.0027	1-102-122-00
4	1-102-937-00	39	1-102-965-00	270	1-102-980-00	0.0033	1-102-123-00
5	1-102-942-00	43	1-102-966-00	300	1-102-981-00	0.0039	1-102-124-00
6	1-102-943-00	47	1-101-880-00	330	1-102-820-00	0.0047	1-102-125-00
7	1-102-944-00	51	1-101-882-00	360	1-102-821-00	0.0056	1-102-126-00
8	1-102-945-00	56	1-101-884-00	390	1-102-822-00	0.0068	1-102-127-00
9	1-102-946-00	62	1-101-886-00	430	1-102-823-00	0.0082	1-102-128-00
10	1-102-947-00	68	1-101-888-00	470	1-102-824-00	0.01	1-102-129-00
11	1-102-948-00	75	1-101-890-00	510	1-101-059-00	0.022	1-101-005-00
12	1-102-949-00	82	1-102-971-00	560	1-102-115-00	0.047	1-101-006-00
13	1-102-950-00	91	1-102-972-00	680	1-102-116-00		
15	1-102-951-00	100	1-102-973-00	820	1-102-117-00		
16	1-102-952-00	110	1-102-815-00				
18	1-102-953-00	120	1-102-816-00				
20	1-102-958-00	130	1-101-081-00				

0.001μF = 1,000pF

**CERAMIC (SEMICONDUCTOR) CAPACITORS (A)**

RATING → Use the high voltage rated one.					
CAP. (μF)	25 VOLT.	50 VOLT.	CAP. (μF)	25 VOLT.	50 VOLT.
	PART No.	PART No.		PART No.	PART No.
0.001	→	1-161-039-00	0.018	1-161-016-00	1-161-054-00
0.0012	→	1-161-040-00	0.022	1-161-017-00	1-161-055-00
0.0015		1-161-041-00	0.027	1-161-018-00	1-161-056-00
0.0018		1-161-042-00	0.033	1-161-019-00	1-161-057-00
0.0022		1-161-043-00	0.039	1-161-010-00	1-161-058-00
0.0027	→	1-161-044-00	0.047	1-161-021-00	1-161-059-00
0.0033	→	1-161-045-00	0.056	→	1-161-060-00
0.0039	→	1-161-046-00	0.068	→	1-161-061-00
0.0047	→	1-161-047-00	0.082	1-161-024-00	1-161-062-00
0.0056	→	1-161-048-00	0.1	1-161-025-00	1-161-063-00
0.0068	→	1-161-049-00			
0.0082	1-161-012-00	1-161-050-00			
0.01	1-161-013-00	1-161-051-00			
0.012	→	1-161-052-00			
0.015	1-161-015-00	1-161-053-00			

## MYLAR CAPACITORS (A)


Note: Circled letters (A) to (Z) are applicable to European models only.

RATING											
CAP. (μF)	90 VOLT.			CAP. (μF)	50 VOLT.			CAP. (μF)	50 VOLT.		
	PART No.	PART No.	PART No.		PART No.	PART No.	PART No.		PART No.	PART No.	PART No.
0.001	1-108-227-00	1-108-365-00	1-108-409-00	0.01	1-108-239-00	1-108-377-00	1-108-421-00	0.1	1-108-251-00	1-108-389-00	1-108-433-00
0.0012	1-108-351-00	1-108-366-00	1-108-410-00	0.012	1-108-357-00	1-108-378-00	1-108-422-00	0.12	1-108-363-00	1-108-390-00	1-108-434-00
0.0015	1-108-228-00	1-108-367-00	1-108-411-00	0.015	1-108-240-00	1-108-379-00	1-108-423-00	0.15	1-108-252-00	1-108-391-00	1-108-435-00
0.0018	1-108-352-00	1-108-368-00	1-108-412-00	0.018	1-108-358-00	1-108-380-00	1-108-424-00	0.18	1-108-364-00	1-108-392-00	1-108-436-00
0.0022	1-108-230-00	1-108-369-00	1-108-413-00	0.022	1-108-242-00	1-108-381-00	1-108-425-00	0.22	1-108-254-00	1-108-393-00	1-108-437-00
0.0027	1-108-353-00	1-108-370-00	1-108-414-00	0.027	1-108-359-00	1-108-382-00	1-108-426-00	0.27	1-108-854-00	-	-
0.0033	1-108-232-00	1-108-371-00	1-108-415-00	0.033	1-108-244-00	1-108-383-00	1-108-427-00	0.33	1-108-855-00	-	-
0.0039	1-108-354-00	1-108-372-00	1-108-416-00	0.039	1-108-360-00	1-108-384-00	1-108-428-00	0.39	1-108-856-00	-	-
0.0047	1-108-234-00	1-108-373-00	1-108-417-00	0.047	1-108-246-00	1-108-385-00	1-108-429-00	0.47	1-108-857-00	-	-
0.0056	1-108-355-00	1-108-374-00	1-108-418-00	0.056	1-108-361-00	1-108-386-00	1-108-430-00	-	-	-	-
0.0068	1-108-237-00	1-108-375-00	1-108-419-00	0.068	1-108-249-00	1-108-387-00	1-108-431-00	-	-	-	-
0.0082	1-108-356-00	1-108-376-00	1-108-420-00	0.082	1-108-362-00	1-108-388-00	1-108-432-00	-	-	-	-



## TANTALUM CAPACITORS

RATING → Use the high voltage rated one.								
CAP. (μF)	3.15 VOLT.		6.3 VOLT.		10 VOLT.		35 VOLT.	
	PART No.	PART No.	PART No.	PART No.	PART No.	PART No.	PART No.	
0.01	-	-	-	-	-	-	1-131-396-00 (B)	
0.015	-	-	-	-	-	-	1-131-397-00 (B)	
0.022	-	-	-	-	-	-	1-131-398-00 (B)	
0.033	-	-	-	-	-	-	1-131-399-00 (B)	
0.047	-	-	-	-	-	-	1-131-400-00 (B)	
0.068	-	-	-	-	-	-	1-131-401-00 (B)	
0.1	-	-	-	-	-	-	1-131-402-00 (B)	
0.15	-	-	-	-	-	-	1-131-403-00 (B)	
0.22	-	-	-	-	-	-	1-131-404-00 (B)	
0.33	-	-	-	-	-	1-131-409-00 (B)	1-131-405-00 (B)	
0.47	-	-	-	-	1-131-412-00 (B)	-	1-131-406-00 (B)	
0.68	-	-	-	1-131-415-00 (B)	-	1-131-410-00 (B)	1-131-407-00 (B)	
1.0	-	-	1-131-418-00 (B)	-	1-131-413-00 (B)	-	1-131-408-00 (B)	
1.5	-	1-131-421-00 (B)	-	1-131-416-00 (B)	-	1-131-411-00 (B)	1-131-348-00 (B)	
2.2	1-131-424-00 (B)	-	1-131-419-00 (B)	-	1-131-414-00 (B)	1-131-355-00 (B)	1-131-349-00 (B)	
3.3	-	1-131-422-00 (B)	-	-	1-131-417-00 (B)	1-131-362-00 (B)	1-131-350-00 (B)	
4.7	1-131-425-00 (B)	-	-	1-131-420-00 (B)	1-131-369-00 (B)	1-131-363-00 (B)	1-131-351-00 (C)	
6.8	-	1-131-423-00 (B)	1-131-376-00 (B)	1-131-370-00 (B)	1-131-364-00 (B)	1-131-358-00 (C)	1-131-352-00 (C)	
10	1-131-426-00 (B)	1-131-383-00 (B)	1-131-377-00 (B)	1-131-371-00 (B)	1-131-365-00 (C)	1-131-359-00 (C)	1-131-353-00 (D)	
15	1-131-390-00 (B)	1-131-384-00 (B)	1-131-378-00 (B)	1-131-372-00 (B)	1-131-366-00 (C)	1-131-360-00 (D)	-	
22	1-131-391-00 (B)	1-131-385-00 (B)	1-131-379-00 (C)	1-131-373-00 (C)	1-131-367-00 (D)	-	-	
33	1-131-392-00 (B)	1-131-386-00 (C)	1-131-380-00 (C)	1-131-374-00 (D)	-	-	-	
47	1-131-393-00 (C)	1-131-387-00 (C)	1-131-381-00 (B)	-	-	-	-	
68	1-131-394-00 (B)	1-131-388-00 (C)	-	-	-	-	-	
100	1-131-395-00 (D)	-	-	-	-	-	-	



## TANTALUM CAPACITORS

RATING						
CAP. (μF)	3 VOLT.		6.3 VOLT.		35 VOLT.	
	PART No.	PART No.	PART No.	PART No.	PART No.	PART No.
0.033	-	-	-	-	-	1-131-273-00 (E)
0.047	-	-	-	-	-	1-131-274-00 (E)
0.068	-	-	-	-	-	1-131-275-00 (E)
0.1	-	-	-	-	-	1-131-276-00 (D)
0.15	-	-	-	-	-	1-131-277-00 (D)
0.22	-	-	-	-	1-131-262-00 (D)	1-131-278-00 (D)
0.33	-	-	-	-	1-131-263-00 (D)	1-131-279-00 (D)
0.47	-	-	1-131-169-00 (D)	-	1-131-264-00 (D)	1-131-280-00 (D)
0.68	-	-	-	1-131-258-00 (D)	1-131-265-00 (D)	1-131-281-00 (D)
1.0	-	-	1-131-254-00 (D)	-	1-131-266-00 (D)	1-131-282-00 (D)
1.5	-	1-131-250-00 (D)	-	-	1-131-267-00 (D)	1-131-283-00 (E)
2.2	-	-	-	1-131-259-00 (B)	1-131-268-00 (D)	1-131-284-00 (E)
3.3	-	-	1-131-255-00 (D)	-	1-131-269-00 (D)	-
4.7	-	1-131-251-00 (E)	1-131-171-00 (D)	-	1-131-270-00 (D)	-
6.8	-	-	-	1-131-260-00 (D)	1-131-271-00 (E)	-
10	-	-	1-131-256-00 (D)	-	1-131-272-00 (E)	-
15	-	1-131-252-00 (B)	-	1-131-261-00 (E)	-	-
22	-	-	1-131-257-00 (E)	-	-	-
33	1-131-176-00 (B)	1-131-253-00 (E)	1-131-173-00 (C)	-	-	-
47	1-131-288-00 (F)	1-131-174-00 (D)	-	-	-	-
100	1-131-177-00 (D)	-	-	-	-	-


1/4 WATT CARBON RESISTORS (A)

Note: Circled letter (A) is applicable to European models only.

Ω	Part No.	Ω	Part No.	Ω	Part No.	Ω	Part No.	Ω	Part No.	Ω	Part No.	Ω	Part No.
1.0	1-246-401-00	10	1-246-425-00	100	1-246-449-00	1.0k	1-246-473-00	10k	1-246-497-00	100k	1-246-521-00	1.0M	1-246-545-00
1.1	1-246-402-00	11	1-246-426-00	110	1-246-450-00	1.1k	1-246-474-00	11k	1-246-498-00	110k	1-246-522-00	1.1M	1-210-814-00
1.2	1-246-403-00	12	1-246-427-00	120	1-246-451-00	1.2k	1-246-475-00	12k	1-246-499-00	120k	1-246-523-00	1.2M	1-210-815-00
1.3	1-246-404-00	13	1-246-428-00	130	1-246-452-00	1.3k	1-246-576-00	13k	1-246-500-00	130k	1-246-524-00	1.3M	1-210-816-00
1.5	1-246-405-00	15	1-246-429-00	150	1-246-453-00	1.5k	1-246-577-00	15k	1-246-501-00	150k	1-246-525-00	1.5M	1-210-817-00
1.6	1-246-406-00	16	1-246-430-00	160	1-246-454-00	1.6k	1-246-578-00	16k	1-246-502-00	160k	1-246-526-00	1.6M	1-210-818-00
1.8	1-246-407-00	18	1-246-431-00	180	1-246-455-00	1.8k	1-246-579-00	18k	1-246-503-00	180k	1-246-527-00	1.8M	1-210-819-00
2.0	1-246-408-00	20	1-246-432-00	200	1-246-456-00	2.0k	1-246-580-00	20k	1-246-504-00	200k	1-246-528-00	2.0M	1-210-820-00
2.2	1-246-409-00	22	1-246-433-00	220	1-246-457-00	2.2k	1-246-581-00	22k	1-246-505-00	220k	1-246-529-00	2.2M	1-210-821-00
2.4	1-246-410-00	24	1-246-434-00	240	1-246-458-00	2.4k	1-246-582-00	24k	1-246-506-00	240k	1-246-530-00	2.4M	1-244-754-00
2.7	1-246-411-00	27	1-246-435-00	270	1-246-459-00	2.7k	1-246-583-00	27k	1-246-507-00	270k	1-246-531-00	2.7M	1-244-755-00
3.0	1-246-412-00	30	1-246-436-00	300	1-246-460-00	3.0k	1-246-584-00	30k	1-246-508-00	300k	1-246-532-00	3.0M	1-244-756-00
3.3	1-246-413-00	33	1-246-437-00	330	1-246-461-00	3.3k	1-246-585-00	33k	1-246-509-00	330k	1-246-533-00	3.3M	1-244-757-00
3.6	1-246-414-00	36	1-246-438-00	360	1-246-462-00	3.6k	1-246-586-00	36k	1-246-510-00	360k	1-246-534-00	3.6M	1-244-758-00
3.9	1-246-415-00	39	1-246-439-00	390	1-246-463-00	3.9k	1-246-587-00	39k	1-246-511-00	390k	1-246-535-00	3.9M	1-244-759-00
4.3	1-246-416-00	43	1-246-440-00	430	1-246-464-00	4.3k	1-246-488-00	43k	1-246-512-00	430k	1-246-536-00	4.3M	1-244-760-00
4.7	1-246-417-00	47	1-246-441-00	470	1-246-465-00	4.7k	1-246-489-00	47k	1-246-513-00	470k	1-246-537-00	4.7M	1-244-761-00
5.1	1-246-418-00	51	1-246-442-00	510	1-246-466-00	5.1k	1-246-490-00	51k	1-246-514-00	510k	1-246-538-00	5.1M	1-244-762-00
5.6	1-246-419-00	56	1-246-443-00	560	1-246-467-00	5.6k	1-246-491-00	56k	1-246-515-00	560k	1-246-539-00		
6.2	1-246-420-00	62	1-246-444-00	620	1-246-468-00	6.2k	1-246-492-00	62k	1-246-516-00	620k	1-246-540-00		
6.8	1-246-421-00	68	1-246-445-00	680	1-246-469-00	6.8k	1-246-493-00	68k	1-246-517-00	680k	1-246-541-00		
7.5	1-246-422-00	75	1-246-446-00	750	1-246-470-00	7.5k	1-246-494-00	75k	1-246-518-00	750k	1-246-542-00		
8.2	1-246-423-00	82	1-246-447-00	820	1-246-471-00	8.2k	1-246-495-00	82k	1-246-519-00	820k	1-246-543-00		
9.1	1-246-424-00	91	1-246-448-00	910	1-246-472-00	9.1k	1-246-496-00	91k	1-246-520-00	910k	1-246-544-00		


HARDWARE NOMENCLATURE

Screw:



Unless otherwise indicated, it means cross-recessed head (Phillips type).

Nut, Washer, Retaining ring:



Reference Designation	Shape	Description	Remarks
<b>SCREWS</b>			
P		pan-head screw	binding-head (B) screw for replacement
PWH		pan-head screw with washer face	binding-head (B) screw and flat washer for replacement
PS PSP		pan-head screw with spring washer	binding-head (B) screw and spring washer for replacement
PSW PSPW		pan-head screw with spring and flat washers	binding-head (B) screw and spring and flat washers for replacement
R		round-head screw	binding-head (B) screw for replacement
K		flat-countersunk-head screw	
RK		oval-countersunk-head screw	
B		binding-head screw	
T		truss-head screw	binding-head (B) screw for replacement
F		flat-fillister-head screw	
RF		fillister-head screw	
BV		brazer-head screw	

Reference Designation	Shape	Description	Remarks
<b>SELF-TAPPING SCREWS</b>			
TA		self-tapping screw	ex: TA, P 3 x 10
PTP		pan-head self-tapping screw	binding-head self-tapping (TA, B) screw for replacement
PTPWH		pan-head self-tapping screw with washer face	binding-head self-tapping (TA, B) screw and flat washer for replacement
PTTWH		pan-head thread-rolling screw with washer face	binding-head (B) screw and flat washer for replacement
<b>SET SCREWS</b>			
SC		set screw	
SC		hexagon-socket set screw	ex: SC 2.6 x 4, hexagon socket
<b>NUT</b>			
N		nut	
<b>WASHERS</b>			
W		flat washer	
SW		spring washer	
LW		internal-tooth lock washer	ex: LW3, internal
LW		external-tooth lock washer	ex: LW3, external
<b>RETAINING RINGS</b>			
E		retaining ring	
G		grip-type retaining ring	



*AEP Model*  
*UK Model*  
*SCN Model*

**SUPPLEMENT**

File this supplement with the service manual.

No. 1

December 1979

**PRODUCTION CHANGE**

**COUNTER and EQ BOARD**

AEP Model

Serial No. 505701 and later

UK Model

Serial No. 600501 and later

SCN Model

Serial No. 550001 and later

**TUNER BOARD**

AEP Model

Serial No. 505801 and later

UK Model


Serial No. 601501 and later

SCN Model

Serial No. 550001 and later

**SONY®**  
**SERVICE MANUAL**


## MOUNTING DIAGRAM

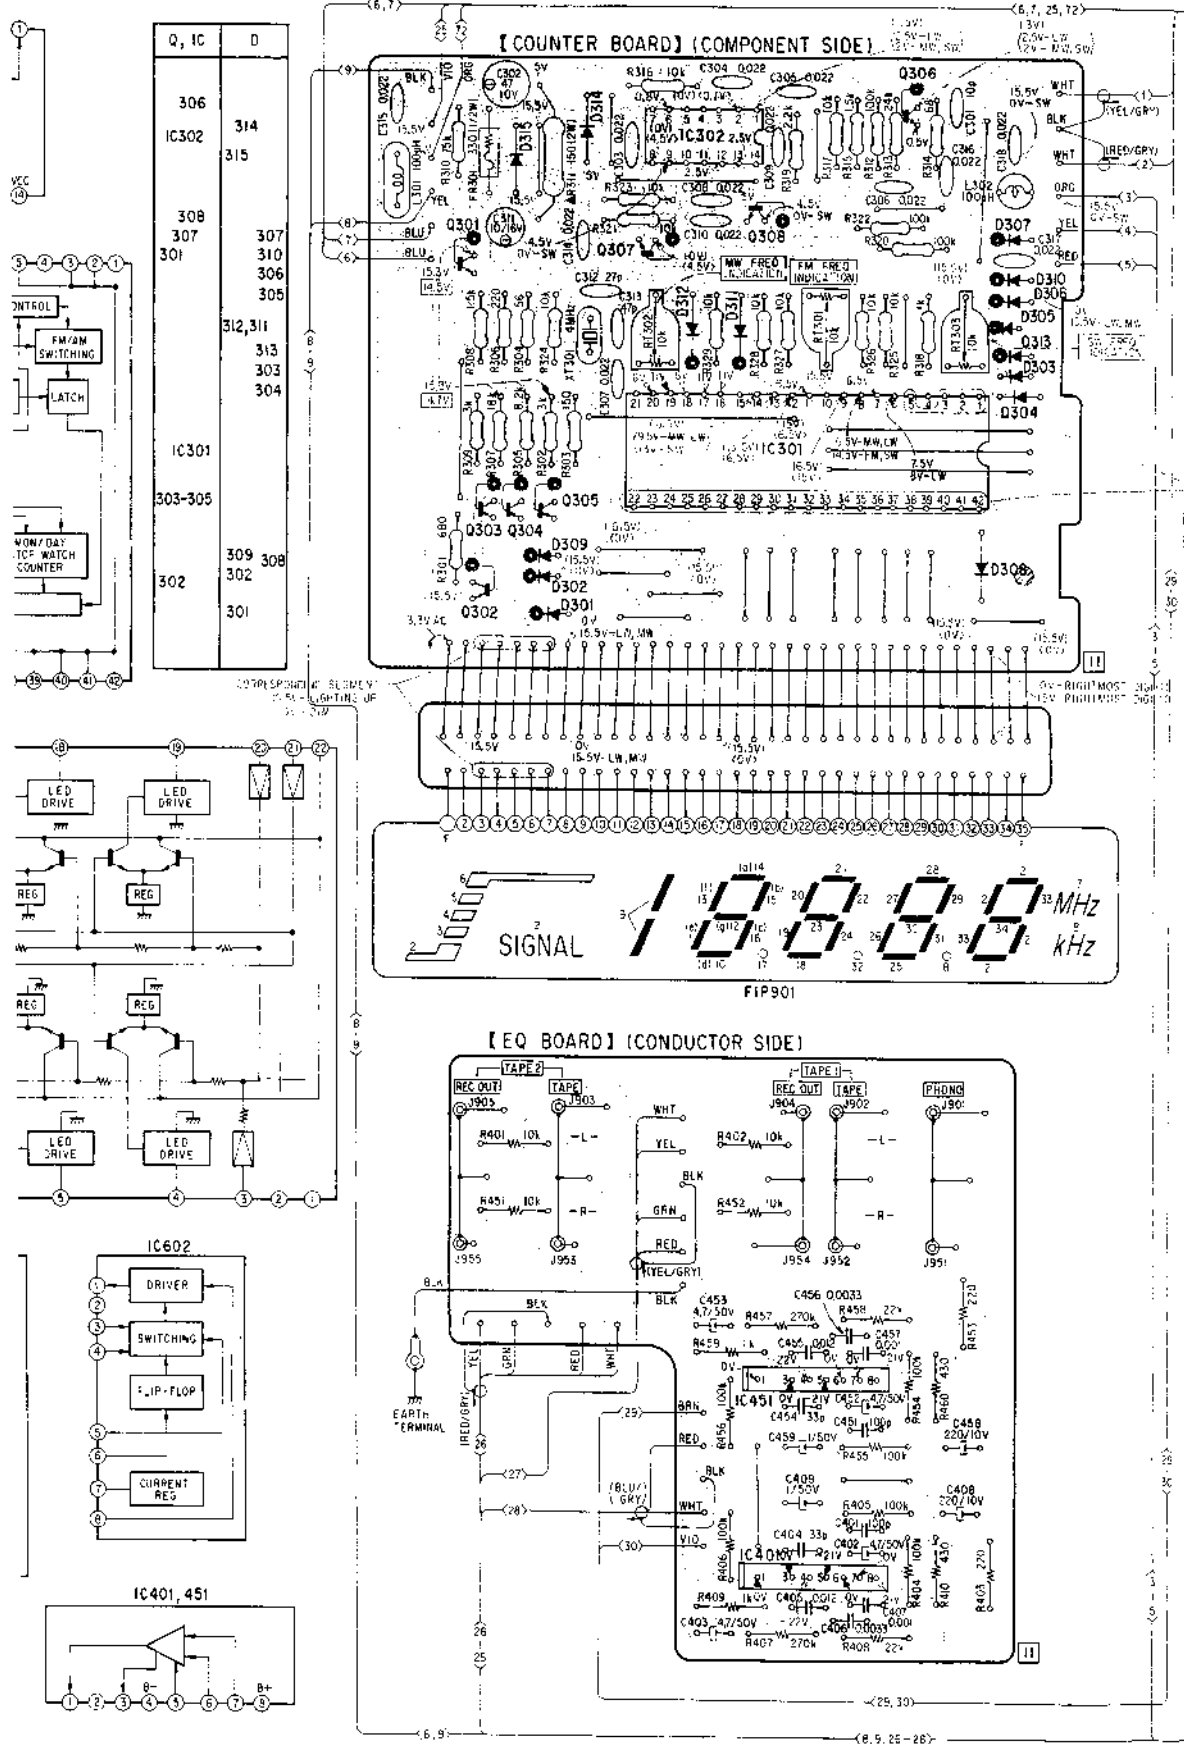



# STR-434L STR-434L

*Scop*

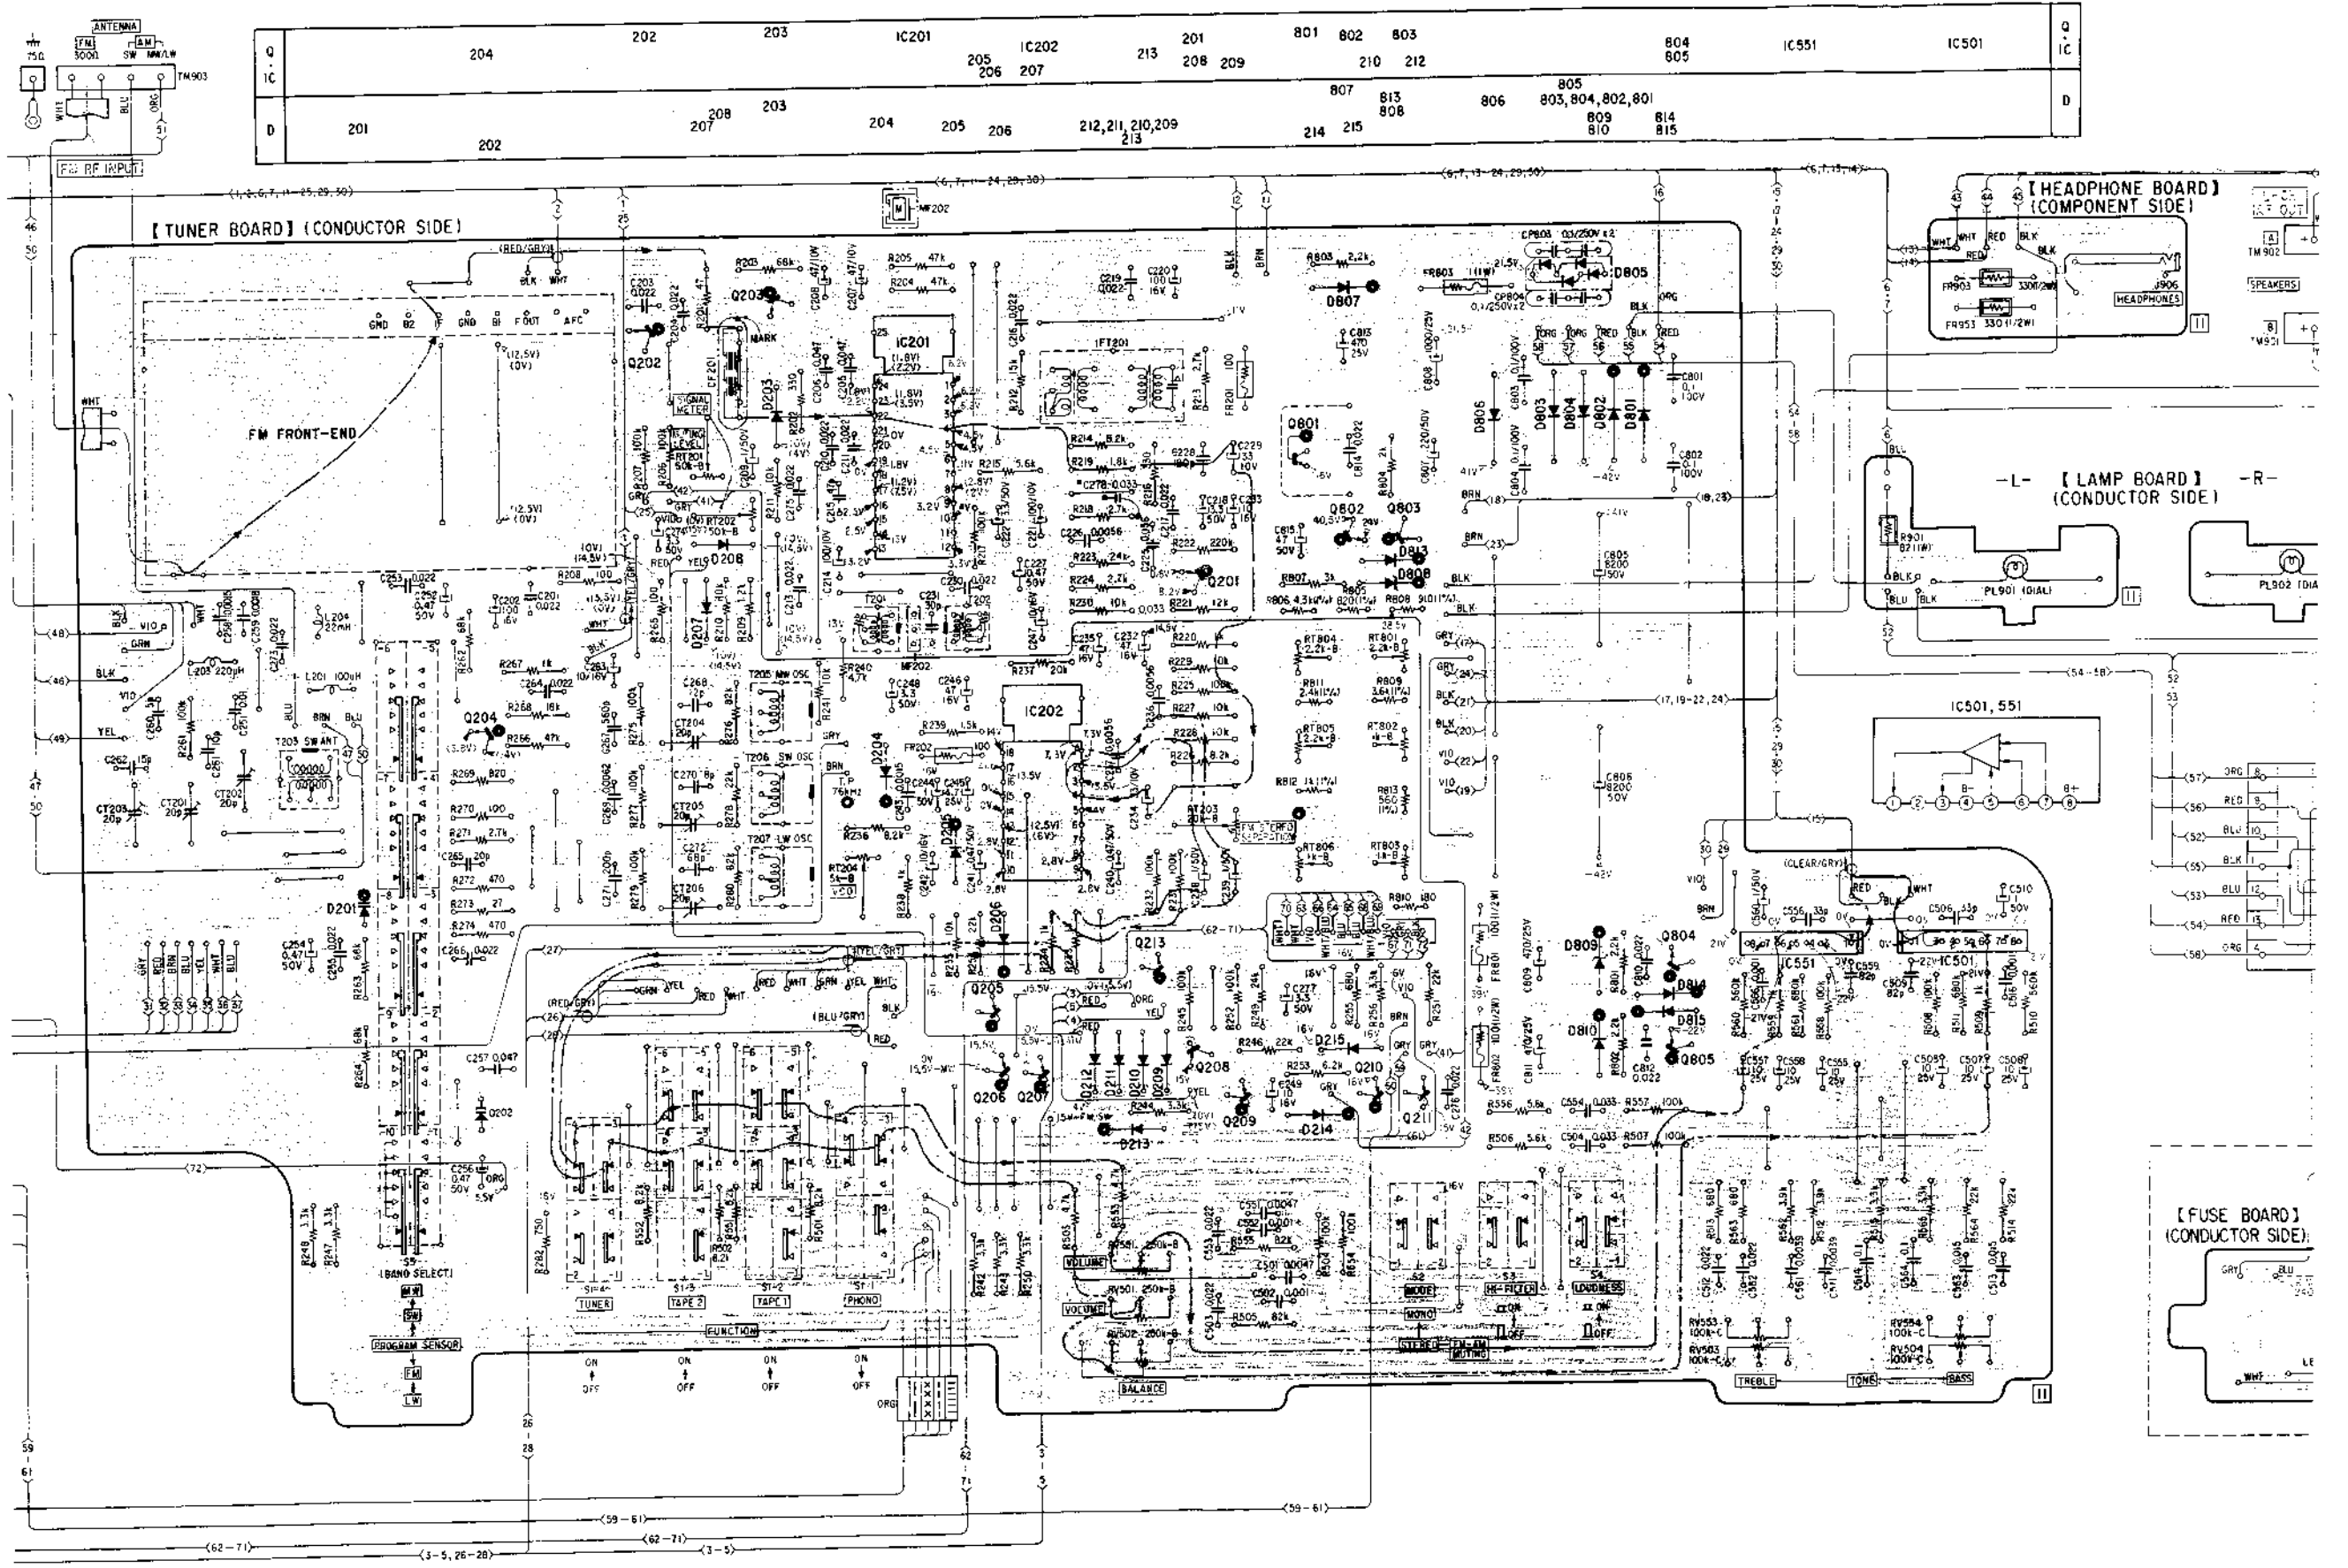

Q	204	202	203	IC201	IC202	213	201	801	802	803	804	IC551	IC501	Q							
IC				205	206	207	208	209	210	212	805			IC							
D	201	202	207	208	203	204	205	206	212, 211, 210, 209, 213	214	215	807	813	808	806	805	803, 804, 802, 801	809	814	815	D

SCHEMATIC DIAGRAM

