


ECH 42

EAF 42

EBC 41

EL 41

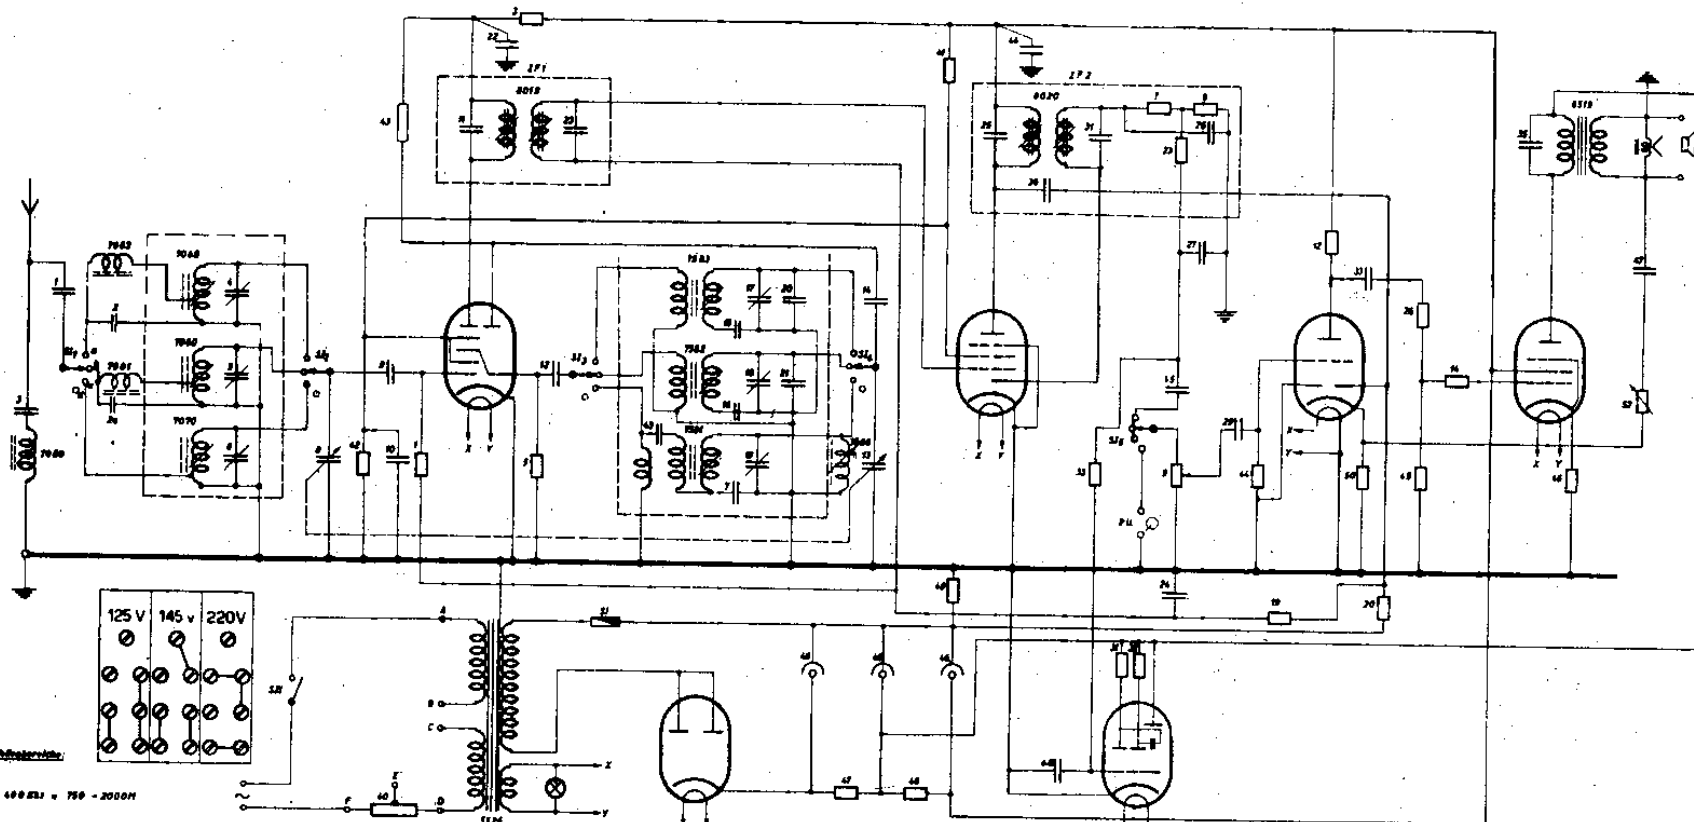


4 CW 150 - 400 kHz = 750 - 2000 H

5) 100 kHz - 1000 kHz = 100 - 1000 H


6) 100 kHz - 200 kHz = 100 - 200 H

7) 100 kHz - 200 kHz = 100 - 200 H

Ansicht von oben

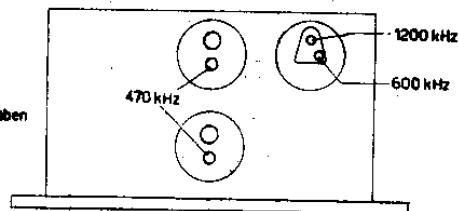


Ansicht von unten

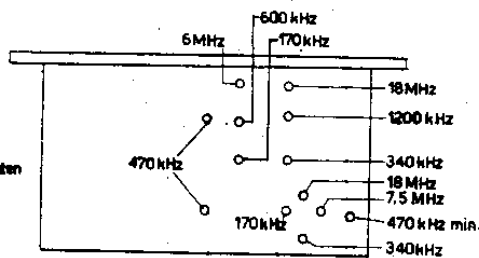


EZ 40

EM 34 EM 4

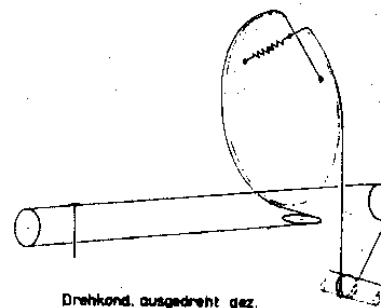

Drehkond. ausgedreht gez.

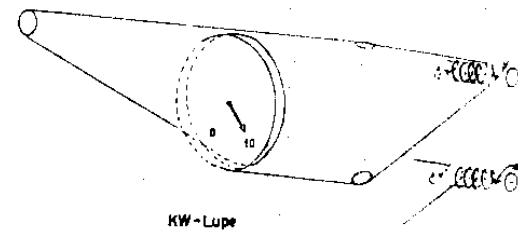

KW-Lupe

Sondyna A.G.
Zürich

Sondyna E 5011

ZF = 470 kHz

Sondyna E 5011

KONDENSATOREN

C1	500 pF	C19	3-30 pF
C2	100 pF	C20	51 pF
C2a	100 pF	C21	20 pF
C3	51 pF	C22	0,047 uF
C4	5-40 pF	C23	200 pF
C5	3-30 pF	C24	0,05 uF
C6	3-30 pF	C25	200 pF
C7	6000 pF	C26	100 pF
C8	Drehko	C27	100 pF
C9	100 pF	C29	0,01 uF
C10	0,1 uF	C31	200 pF
C11	200 pF	C33	0,02 uF
C12	51 pF	C35	3000 pF
C13	Drehko	C36	51 pF
C14	100 pF	C40	0,01 uF
C15	187 pF	C43	100 pF
C16	530 pF	C44	0,047 uF
C17	3-30 pF	C45	0,02 pF
C18	3-30 pF	C46	2x20, 1x40
		C47	0,5 uF

WIDERSTÄENDE

R1	1 Meg	R31	1 Meg
R3	750 Ohm	R32	1 Meg
R5	51 kOhm	R33	2 Meg
R7	100 kOhm	R40	32+56
R8	390 kOhm	R41	24 kOhm
R9	1 Meg	R42	51 kOhm
R10	5 kOhm	R43	20 kOhm
R12	200 kOhm	R44	10 Meg
R14	1 kOhm	R45	820 kOhm
R19	1 Meg	R46	150 Ohm
R20	1 Meg	R47	560 Ohm
R23	100 kOhm	R48	3,1 kOhm
R26	100 kOhm	R49	36 Ohm
		R50	36 Ohm
		R52	5 kOhm