

STR-V45L

AEP Model
UK Model



FM STEREO/FM-AM RECEIVER

SPECIFICATIONS

GENERAL

- Power Requirements:** 220 V ac, 50/60 Hz (AEP model)
240 V ac, 50/60 Hz (UK model)
- Power Consumption:** 180 W (AEP model)
210 W (UK model)
- Dimensions:** Approx. 430 (w) x 135 (h) x 380 (d) mm
17 (w) x 5 1/4 (h) x 14 7/8 (d) inches
including projecting parts and controls
- Weight:** Approx. 8.5 kg, 18 lb 12 oz (net)
9.7 kg, 21 lb 7 oz (in shipping carton)

AMPLIFIER SECTION

- Continuous RMS Power Output:**
(less than 0.04% THD,
both channels driven simultaneously)
At 1 kHz
40 + 40 W (8 Ω)
- At 20 Hz – 20 kHz
40 + 40 W (8 Ω)
- According to DIN 45500
40 + 40 W (8 Ω)

- Power Bandwidth (IHF):** 5 Hz – 35 kHz

- Harmonic Distortion:** Less than 0.04 % at rated output

- Intermodulation (IM) Distortion:** Less than 0.04 % at rated output
(60Hz : 7kHz = 4 : 1)
- Damping Factor:** 50 at 1 kHz, 8 Ω
- Dynamic Headroom:** 1.4 dB
- Residual Noise:** Less than 0.23 mV at 8 Ω

Inputs:

	Sensitivity	Impedance	S/N	Weighting network
PHONO	2.5 mV (-50 dB)	50 kΩ	80 dB 77 dB*	A
TAPE 1, 2	150 mV (-13.5 dB)	50 kΩ	97 dB 74 dB*	A
AUX	150 mV (-13.5 dB)	50 kΩ	97 dB 74 dB*	A

* '78 IHF, Measured with rated output power into 8 Ω loads
(both channels driven simultaneously) at 1 kHz.

— Continued on page 2 —

SAFETY RELATED COMPONENT WARNING!

COMPONENTS IDENTIFIED BY SHADING AND MARK ON THE SCHEMATIC DIAGRAMS, EXPLODED VIEWS AND IN THE PARTS LIST ARE CRITICAL TO SAFE OPERATION. REPLACE THESE COMPONENTS WITH SONY PARTS WHOSE PART NUMBERS APPEAR AS SHOWN IN THIS MANUAL OR IN SUPPLEMENTS PUBLISHED BY SONY.

SONY
SERVICE MANUAL

STR-V45L

Outputs:

REC OUT 1, 2	Voltage 150 mV (-13.5 dB), Impedance 10 kΩ
HEADPHONES	Accepts low-impedance headphones
SPEAKERS	8 – 16 Ω speakers are suitable

Measured with rated input, FM 30 % modulation

Frequency Response: PHONO: RIAA equalization curve ± 0.5 dB
AUX, TAPE 1, 2: 5 Hz – 50 kHz $^{+0}_{-1}$ dB

Tone Controls: BASS: ± 10 dB at 50 Hz
TREBLE: ± 10 dB at 20 kHz

Loudness Control: +10 dB at 50 Hz, +3 dB at 10 kHz
(att. 30dB)

Filter: LOW: 12 dB/octave attenuation below 15Hz

FM TUNER SECTION

Tuning Range: 87.5 – 108.0 MHz

Antenna Terminals: 300 Ω balanced, 75 Ω unbalanced

Intermediate Frequency: 10.7 MHz

	(at 40 kHz deviation)
Sensitivity:	at 46 dB quieting 18.3 dBf, 4.5 μV (13 dB) (mono) 38.3 dBf, 45 μV (33 dB) (stereo)
Usable Sensitivity:	11.2 dBf, 2.0 μV (6 dB) (IHF) 9.8 dBf, 1.7 μV (4.5 dB) (S/N 26 dB)
Signal-to-noise Ratio:	72 dB (mono), 66 dB (stereo)
Harmonic Distortion:	at 100 Hz 0.1 % (mono), 0.25 % (stereo) at 1 kHz 0.1 % (mono), 0.2 % (stereo) at 6 kHz 0.15 % (mono), 0.2 % (stereo)

Separation: 40 dB at 100 Hz, 50 dB at 1 kHz,
35 dB at 10 kHz

Frequency Response: 40 Hz – 12.5 kHz $^{+0.5}_{-1.5}$ dB
30 Hz – 15 kHz $^{+0.5}_{-1.5}$ dB

Selectivity: 80 dB (300 kHz)


Capture Ratio:	1.5 dB
AM Suppression Ratio:	60 dB
Image Response Ratio:	85 dB
IF Response Ratio:	100 dB
Spurious Response Ratio:	95 dB
RF Intermodulation:	78 dB (IHF), 93 dB (2.4 MHz)
Sub-carrier Product Ratio:	55 dB
Muting Threshold:	Approx. 25.2 dBf, 10 μV (20 dB)
Auto Tuning Level:	LOW: 30 dBf, MID: 40 dBf, HIGH: 55 dBf

AM TUNER SECTION

	MW	LW
Tuning Range:	522 kHz – 1,602 kHz (9 kHz steps)	155 kHz – 344 kHz (1 kHz steps)
Antenna:	built-in antenna provided	provided
	external antenna terminal	provided
Intermediate Frequency:	450 kHz	450 kHz
Usable Sensitivity:	built-in antenna 250 μV/m (48 dB/m) (1,000 kHz)	500 μV/m (54 dB/m) (254 kHz)
	external antenna 100 μV (40 dB) (1,000 kHz)	150 μV (43.5 dB) (254 kHz)
Signal-to-noise Ratio:	52 dB (at 50 mV/m (34 dB/m))	52 dB
Harmonic Distortion:	(at 50 mV/m (34 dB/m), 400 Hz)	0.5 %
Selectivity:	40 dB (9 kHz)	40 dB (9 kHz)

MODEL IDENTIFICATION

– Specification Label –

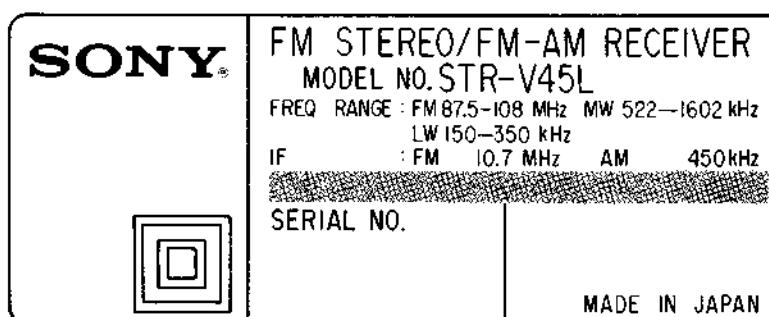

AEP MODEL AC 220V~ 50/60Hz 180W
UK MODEL AC 240V~ 50/60Hz 210W

SERVICING NOTES

INSTALLATION PRECAUTION

The epoxy resin used in a luminous diode is a kind of thermosetting resin, but as a diode must let the light pass through, its heat resistance cannot be raised by mixing silica or glass fiber.

Thus, the resin used in the luminous diodes is usually weak against heat. As the tensile strength is not so strong while it is heated, note the following precautions during soldering.

- 1) Perform the soldering within 5 seconds with a soldering iron below 25W. The clearance between the tube and the board should be more than 3 mm (Fig. 1).
- 2) When changing the position of the luminous diode, do not move it right after soldering, but move it after it naturally cools off.
- 3) When bending the lead terminals, be sure to bend the point 2 mm farther from the tube. At this time, fix the foot of the terminal with a round nose plier and be sure that no force is applied to the tube. If not, a crack may occur (Fig. 2).




Fig. 1




Fig. 2

THE CERAMIC CAPACITORS

This set uses tube-type ceramic capacitors whose shape is identical with the carbon resistors. Be careful not to use resistors instead of capacitors in repairing.


Disc-type ceramic capacitors can be used for replacing those originally used in the set.

Two kinds of drilled holes are provided in some patterns for mounting the tube-type and disc-type ceramic capacitors. Use appropriate holes where applicable.

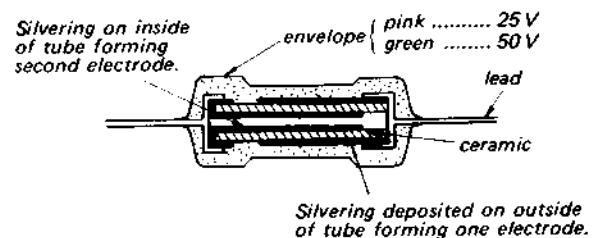


COLOR CODE (in pF)

Color	1st or 2nd Digit	Multiplier	Tolerance	Temperature characteristic
brown	1	10^1		Y
red	2	10^2		D
orange	3	10^3		
yellow	4	10^4		RH
green	5			
blue	6			
violet	7			UJ
gray	8		$\pm 30\%$	X
white	9			SL
black	0	10^0	$\pm 20\%$	CH
gold		10^{-1}	$\pm 5\%$	V
silver		10^{-2}	$\pm 10\%$	B

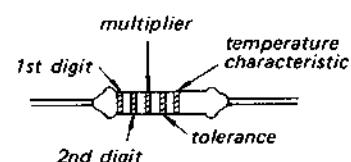

Example:

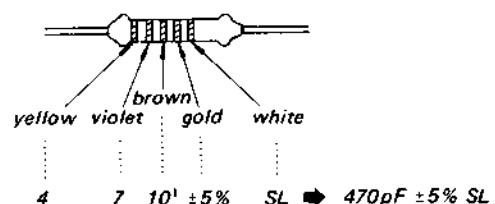

Handling Precautions for MOS ICs


Generally, the insulation resistance of the oxide layer in MOS IC structures is very high, and the oxide layer is very thin. Because of this, it is possible that the static voltages usually present on clothes and the human body will be enough to generate a potential difference across the insulator, high enough to cause a breakdown of the insulating layer.

The following precautions should be taken while handling these ICs.


(Particular care should be taken under conditions of low humidity.)

Precautions in Replacing MOS ICs




1. Store new ICs by inserting them into a urethane-polyester cushion (which is somewhat conductive), or wrapping it in aluminum foil, so that all the pins are at the same potential.
(The ICs should be stored in that manner until mounted on the circuit board.)

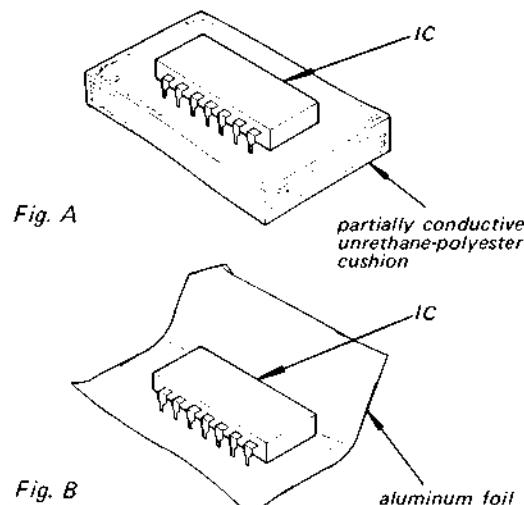

2. Check the soldering iron for possible power-line leakage current. Make sure that there is no leakage path by connecting an ohmmeter to the tip of the soldering iron and the plug as shown in Fig. C. If there is a leakage path, use some other soldering iron.

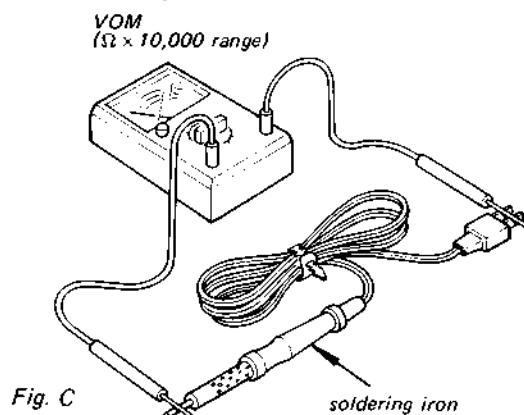

3. Equalize any potential difference between the clothes, the tools in use, the work bench, the set being worked on, and the packaged IC by touching them all in succession with the hands or a conductive wire or tool.
4. The following are effective methods for handling ICs that remove the potential difference across the oxide layer.
 - Use a paper clip modified by soldering in a wire braid insert.

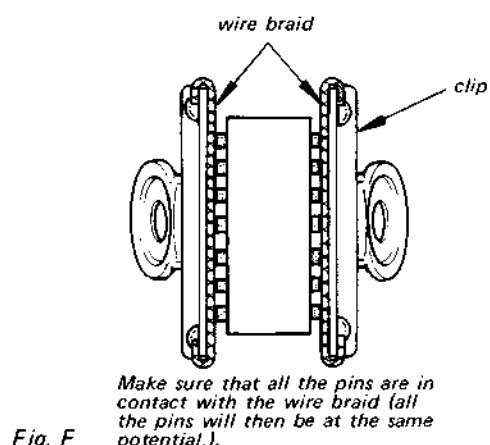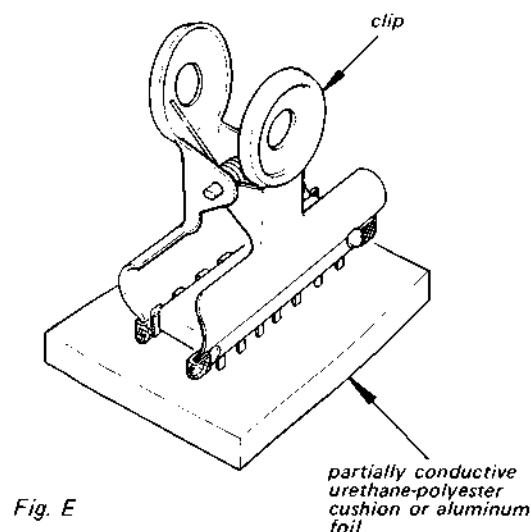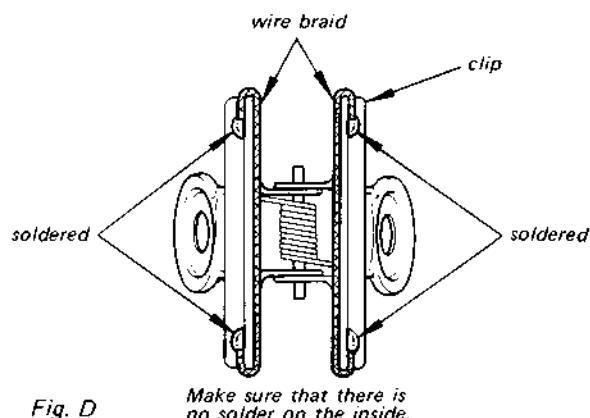

- Take a short length of fine bare wire and wind it around the IC so that it shorts all the pins of the IC, while it is still in the urethane-polyester cushion or aluminum foil. This ensures that all the pins are at the same potential.

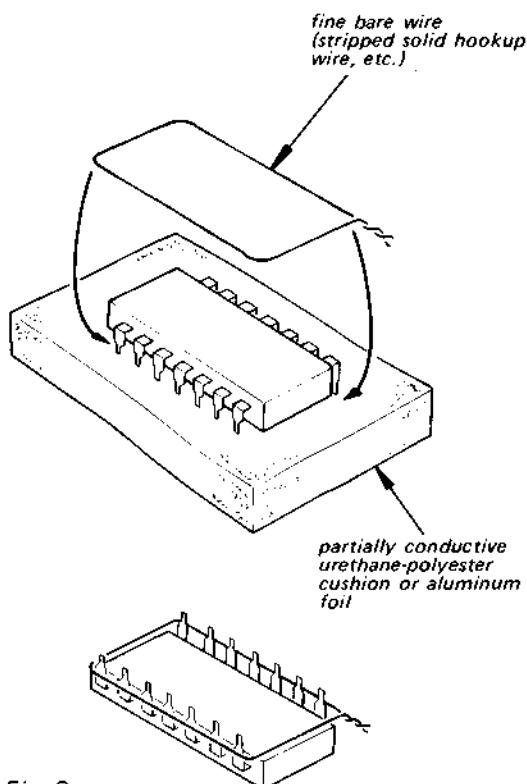


Fig. G

- When it is necessary to handle the IC with the fingers, do not touch any pin, and hold the IC at the ends of its plastic-package case as shown in Fig. H.

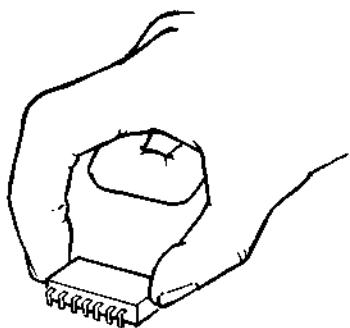


Fig. H

5. Method of Mounting

Insert the IC while holding it with the modified clip, and solder all the pins with the clip still shorting the pins. (Similarly, solder all the pins while the bare shorting wire is still wound around them.). Remove the clip or the bare shorting wire only after all the pins have been soldered.

Precaution while Checking C-MOS ICs

The C-MOS ICs (Complementary MOS) are MOS ICs that have their output sections made up of N-channel and P-channel push-pull stages to increase their speed of operation. If the output terminal of these ICs comes into contact with B+ or B- voltage, then the FET which is ON at that time will either become shorted or open.

This is valid for all the output sections that are connected together by the interconnections. Even the circuits that are physically separated (and not on the same board) can be destroyed simultaneously.

Example:

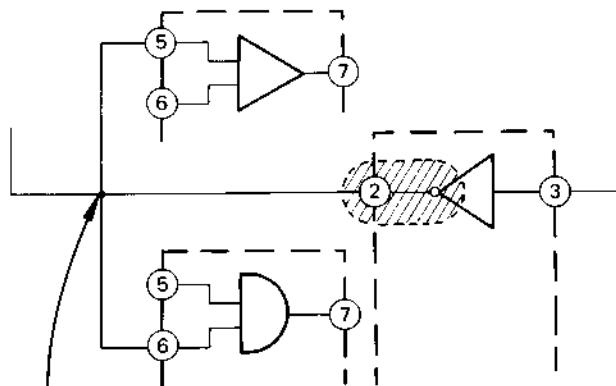



Fig. I

SECTION 1

OUTLINE


1.1. BLOCK DIAGRAM

— Audio Amp and Power Supply Sections —

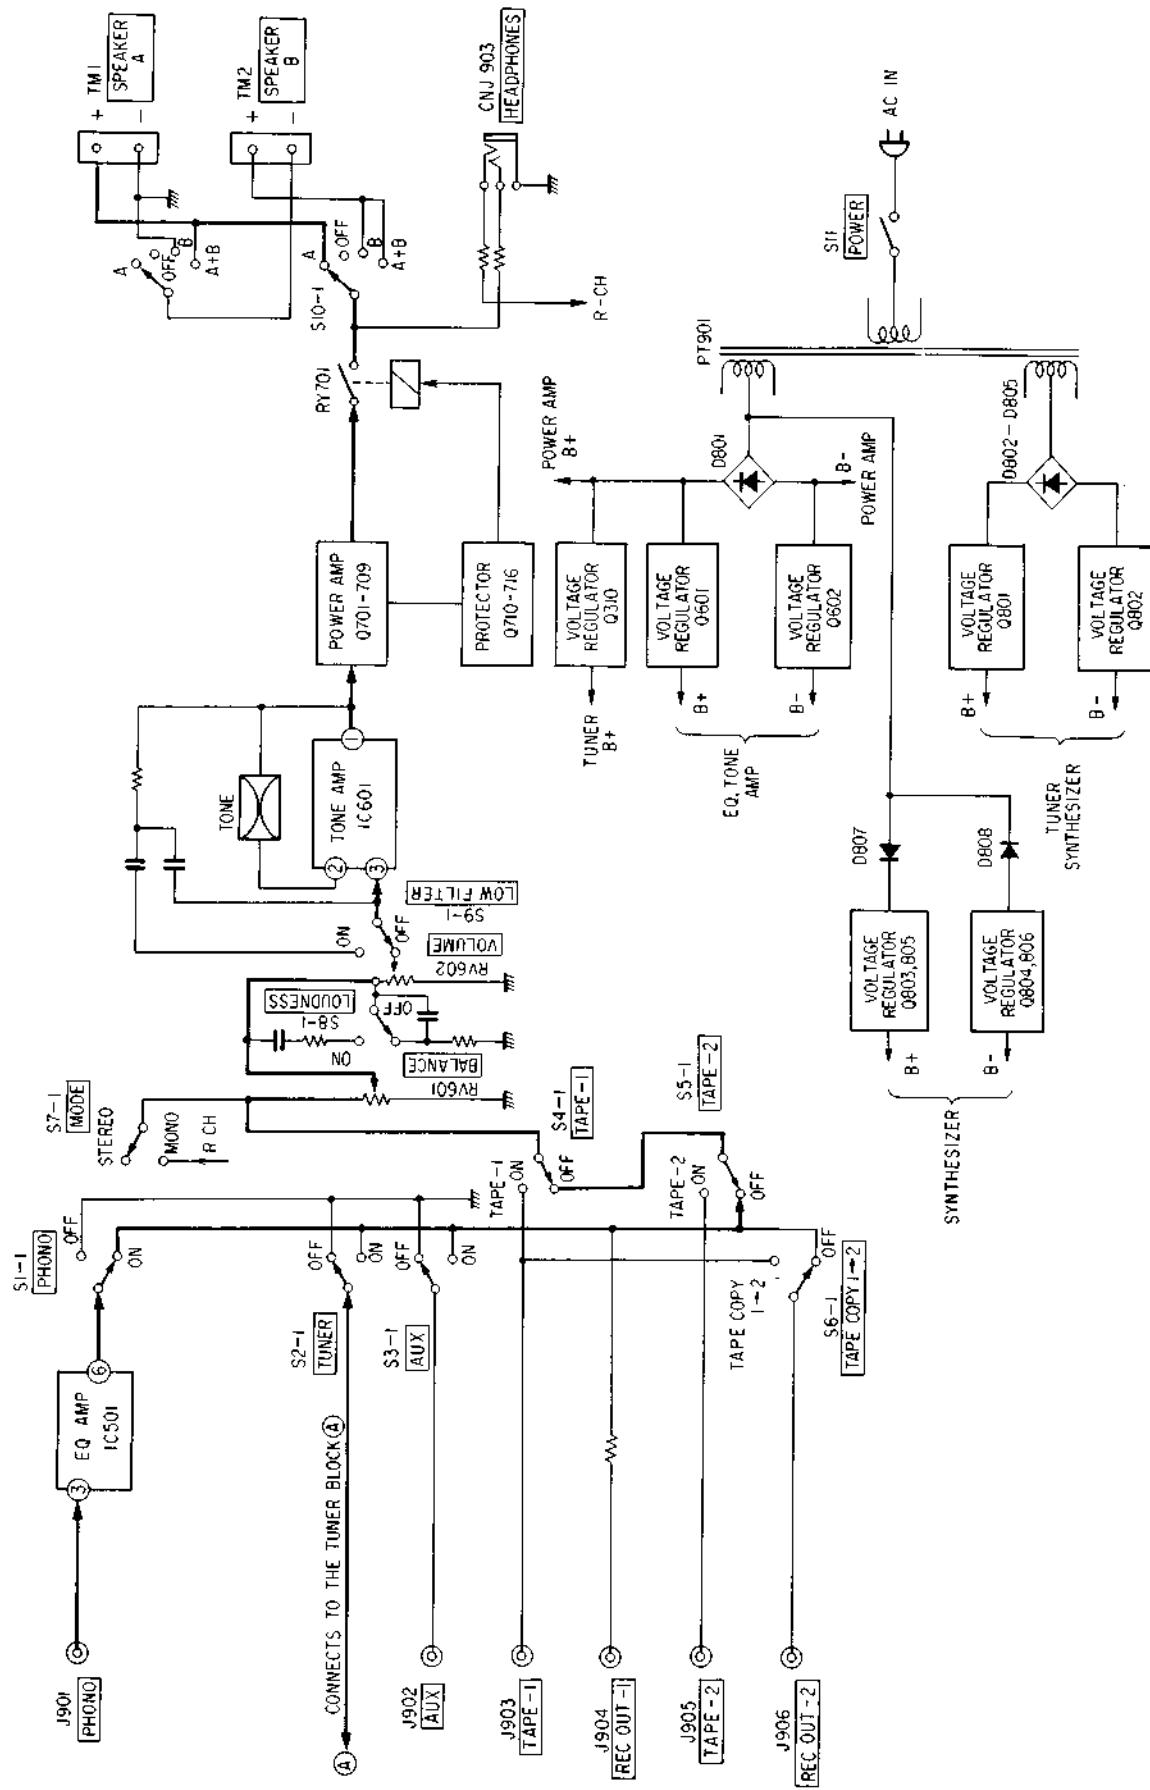

STR-V45L STR-V45L

- Tuner Section -

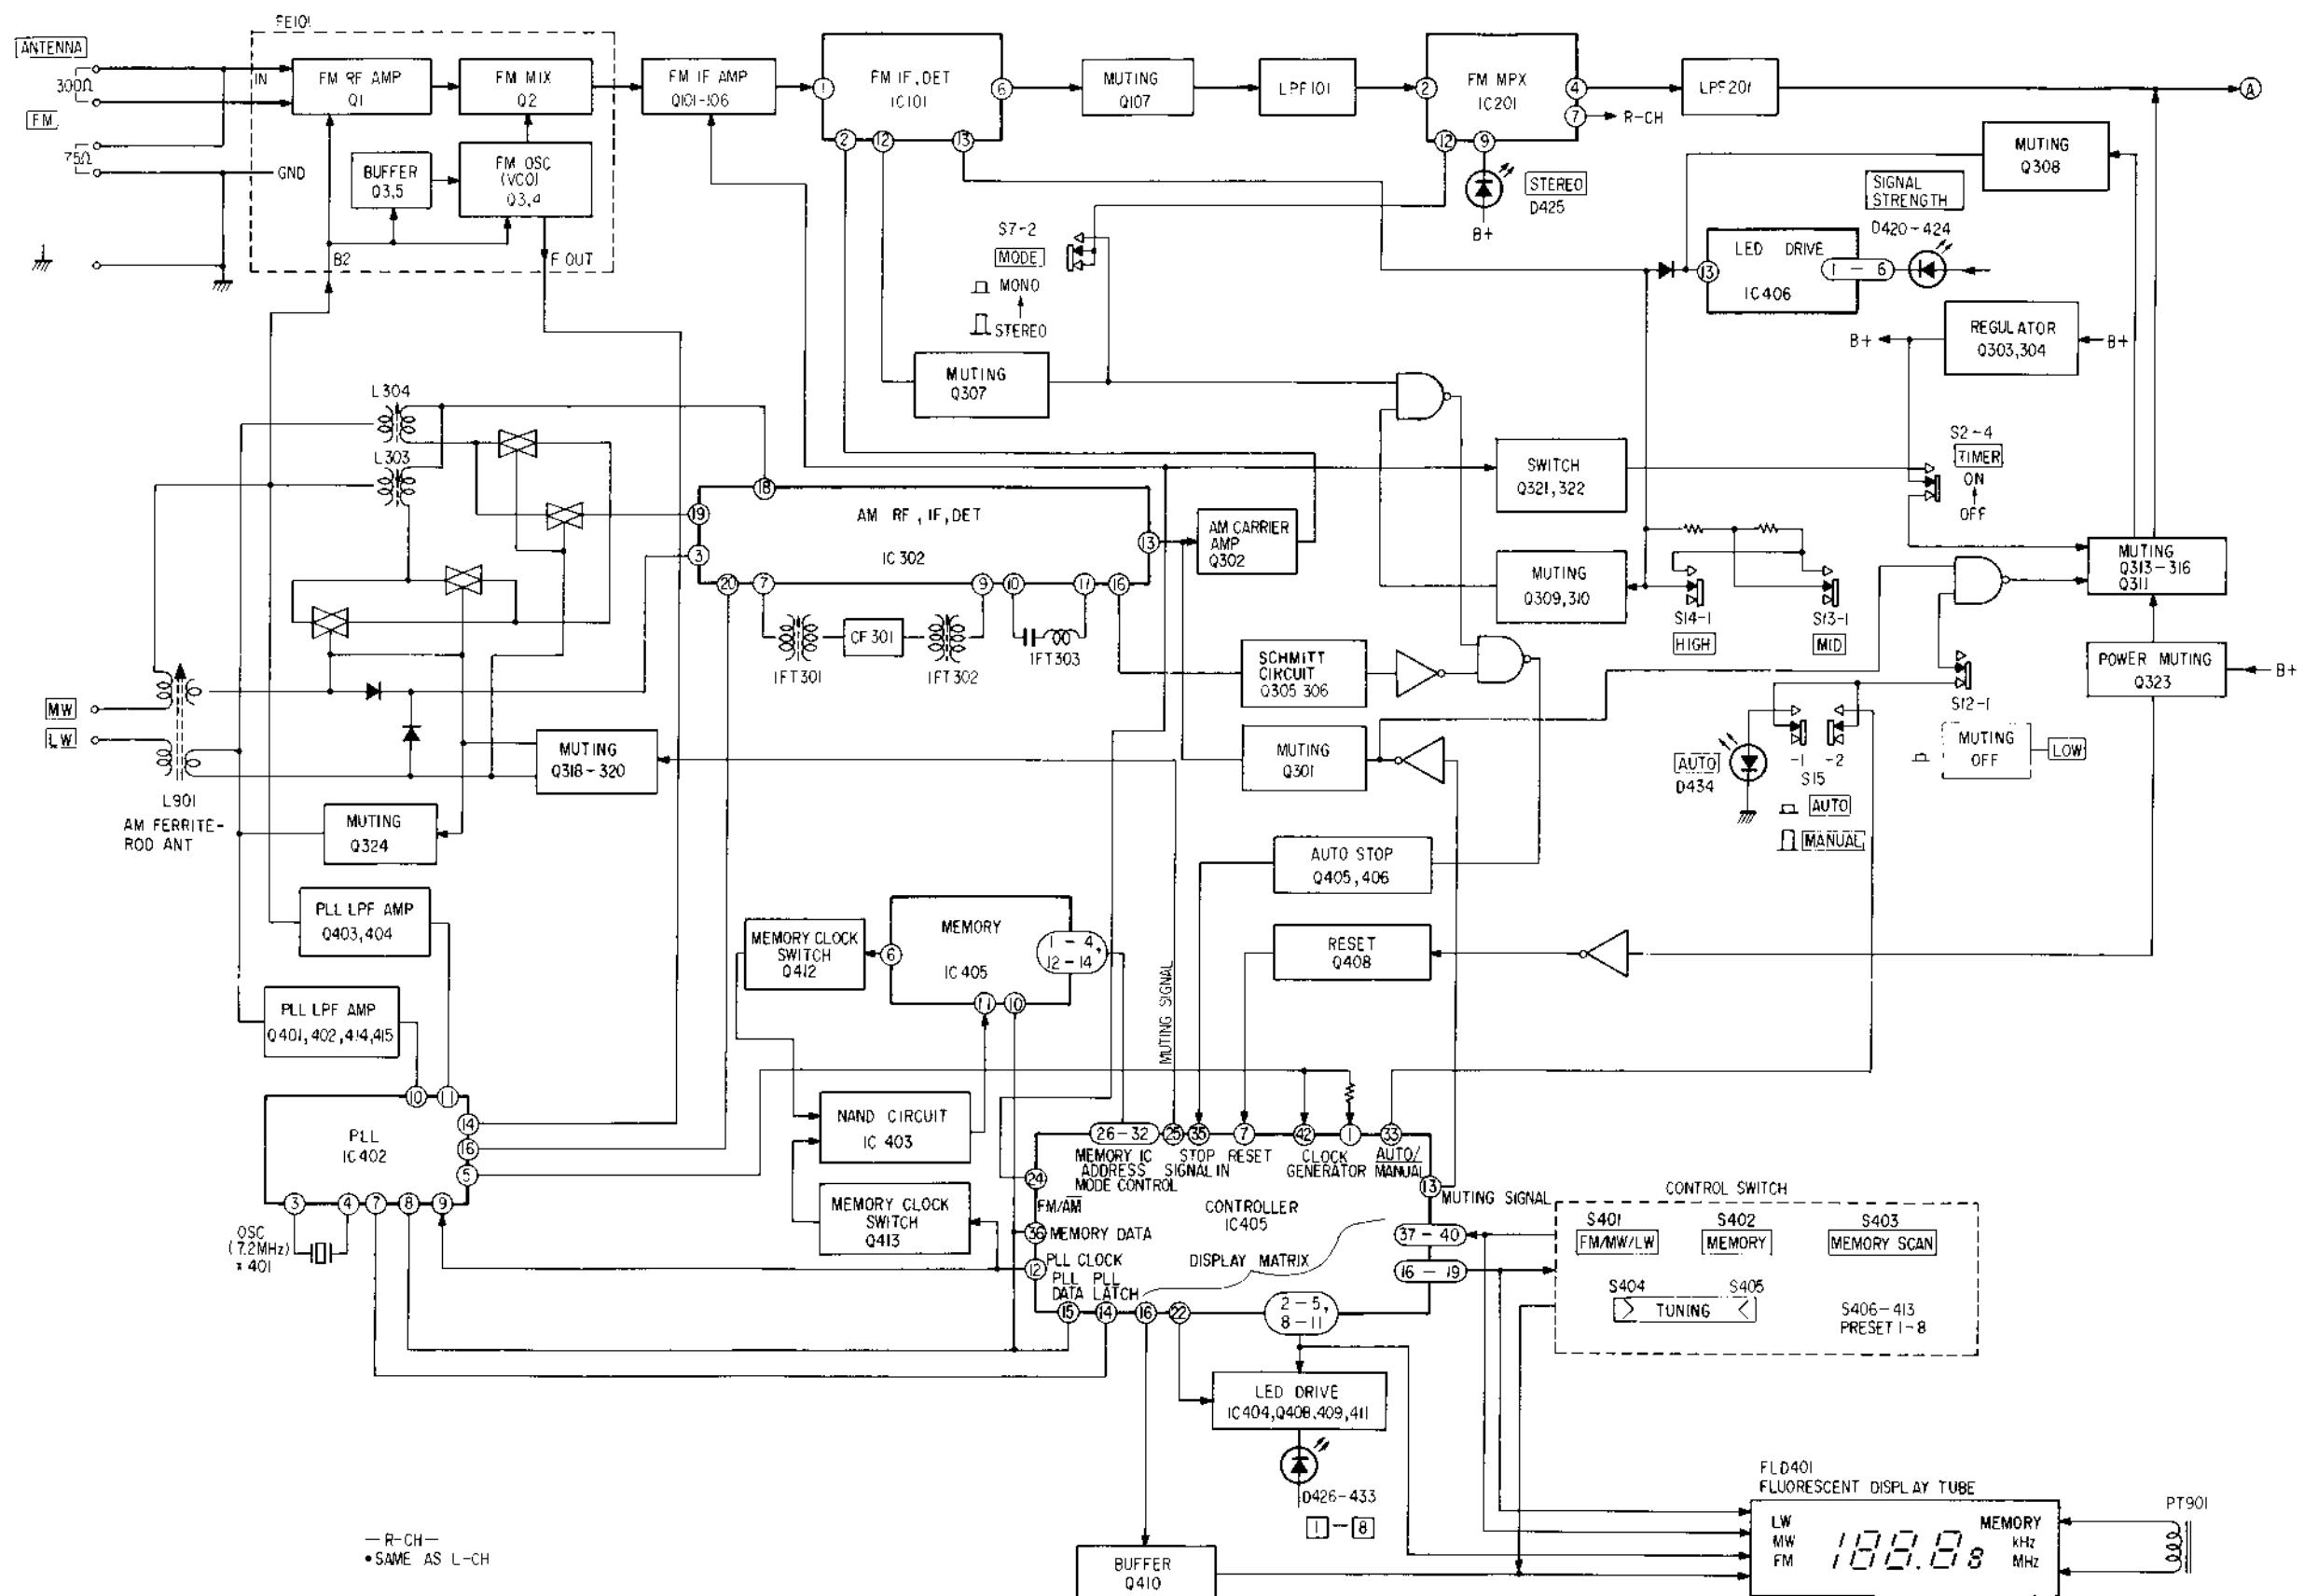

MEMORY IC CX761A (IC405)**Outline of μPD553C-065 (IC401):**

This is a four-bit control microcomputer composed of ALU, ROM, RAM, I/O Ports and control circuit all of which are processed in four-bit parallel manner and are included on a small single chip.

P-channel MOS**ROM (1000 x 8-bits)****RAM (64 x 4-bits)****Input Ports**

A and B

Input/output Ports

C and D

Output Ports

E, F, G, H and I

Clock Frequency: 360 kHz

Input signal is obtained from terminal 5 of the divider output in PLL CX778.

42-pin Plastic Dual-in-Line Package**I/O Ports:****Table 1**

Port	Terminal	Function
PA ₀	33	AUTO/MANUAL
PA ₁	34	N/A
PA ₂	35	Input for AUTO TUNING stop signal
PA ₃	36	Input for memory IC's data
PB ₀₋₃	37 – 40	
PC ₀₋₃	2 – 5	
PD ₀₋₃	8 – 11	
PF ₀₋₃	16 – 19	Refer to Fig. 1.
PG ₀	22	
PG ₁	23	N/A
PG ₂	24	FM/AM
PG ₃	25	Output for muting pulse
PE ₀	12	Clock output for PLL memory IC
PE ₁	13	Output for muting pulse
PE ₂	14	Output for PLL
PE ₃	15	Output for PLL and memory IC
PH ₀	26	
PH ₁	27	
PH ₂	28	
PH ₃	29	
PI ₀	30	→ C1 Outputs for memory
PI ₁	31	→ C2 Outputs for memory
PI ₂	32	→ C3 IC mode control

Outline of CX761A:

- (a) This is a non-volatile memory IC. Has 228 (14 words x 16 bits + 4 bits) non-volatile memory transistors built in, and works for reading, erasure and writing the data word.
- (b) Because of being a non-volatile type memory, this IC maintains the memorized informations for a long time without a battery back-up after the power switch is turned off.
- (c) Word address is done by the BCD inputs.
- (d) Silicon-type P-channel enhancement MNOS IC construction.
- (e) 14-pin molded DIP casing.

Refer to the schematic diagram for the block diagram.

Table 2. Function of Terminals:

Terminal	IN or OUT	Function
1	IN	Word address D
2	IN	Word address C
3	IN	Word address B
4	IN	Word address A
5	IN	Power supply input
6	IN/OUT	Writing and erasure control inputs/memory-BUSY output
7	IN	Power supply input
8	IN/OUT	Inputs and outputs for test checkout
9	IN	Test signal
10	IN/OUT	Combined data inputs and data outputs
11	IN	Input for synchronous clock
12	IN	Input for mode control C3
13	IN	Input for mode control C2
14	IN	Input for mode control C1

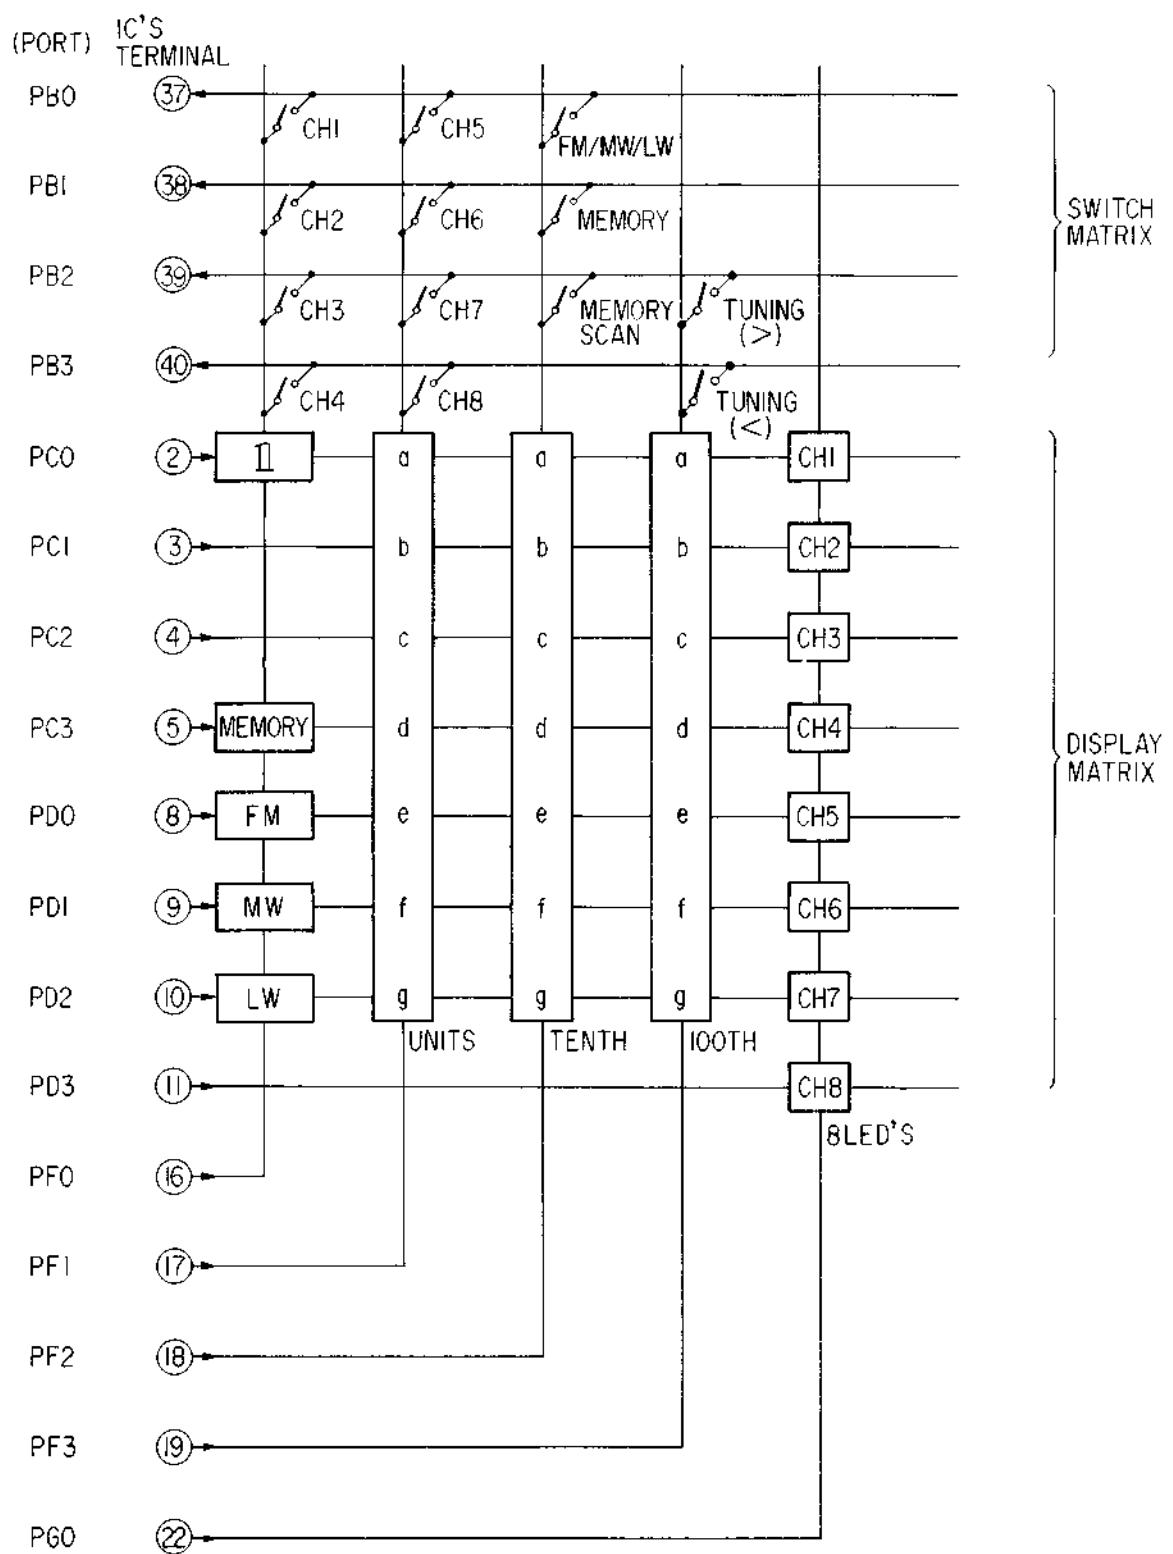


Fig. 1


SECTION 2

DISASSEMBLY


Note: Follow the disassembly procedure in the numerical order given.

TOP COVER AND BOTTOM PLATE REMOVAL


Note: Circuit-board checkouts and adjustments can be made after this removal.

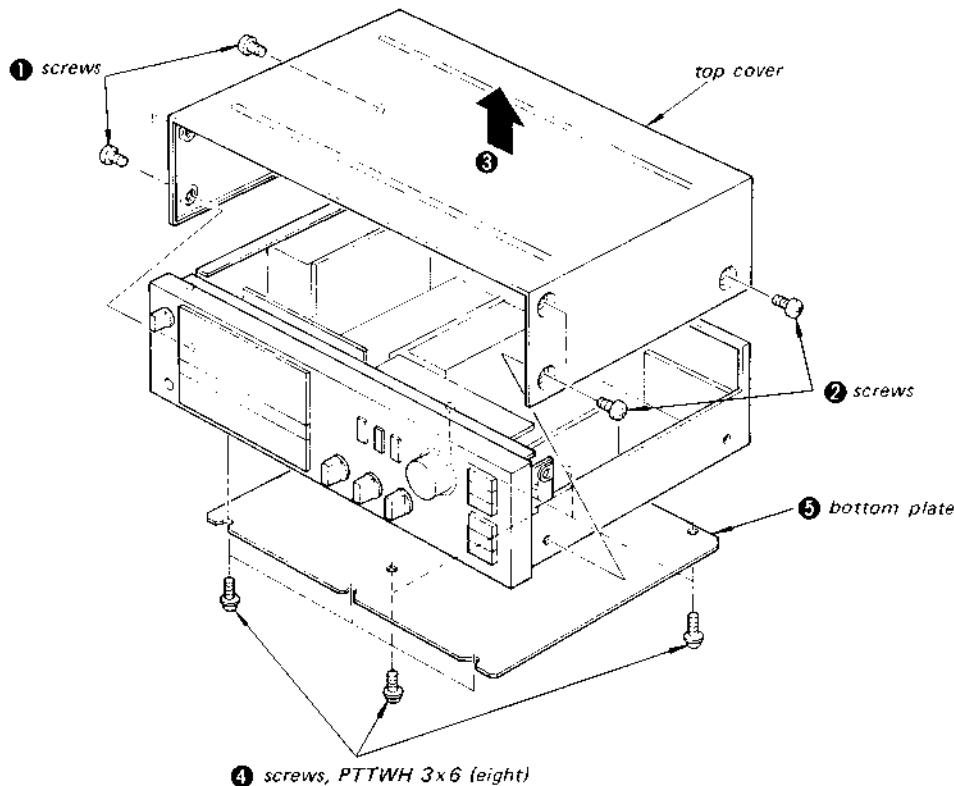


FRONT PANEL REMOVAL

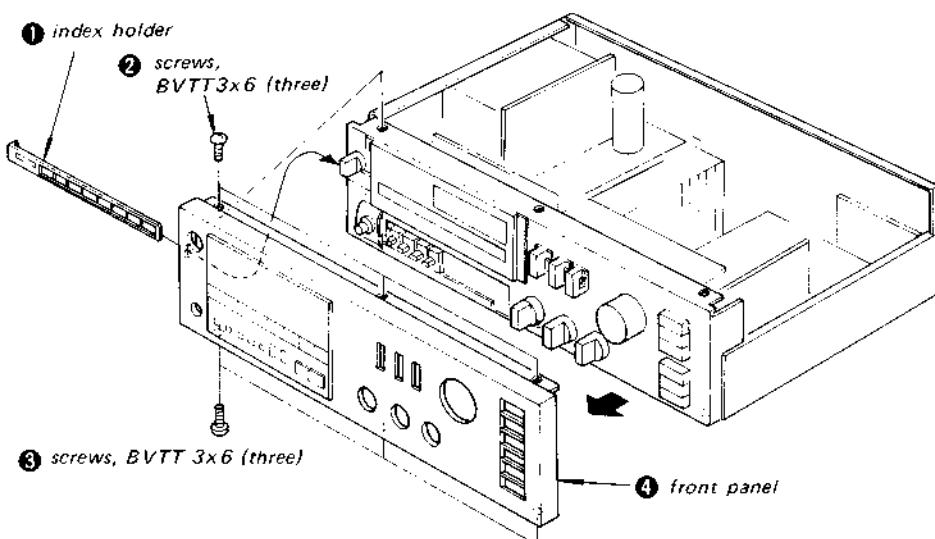

CIRCUIT BOARDS LAYOUT

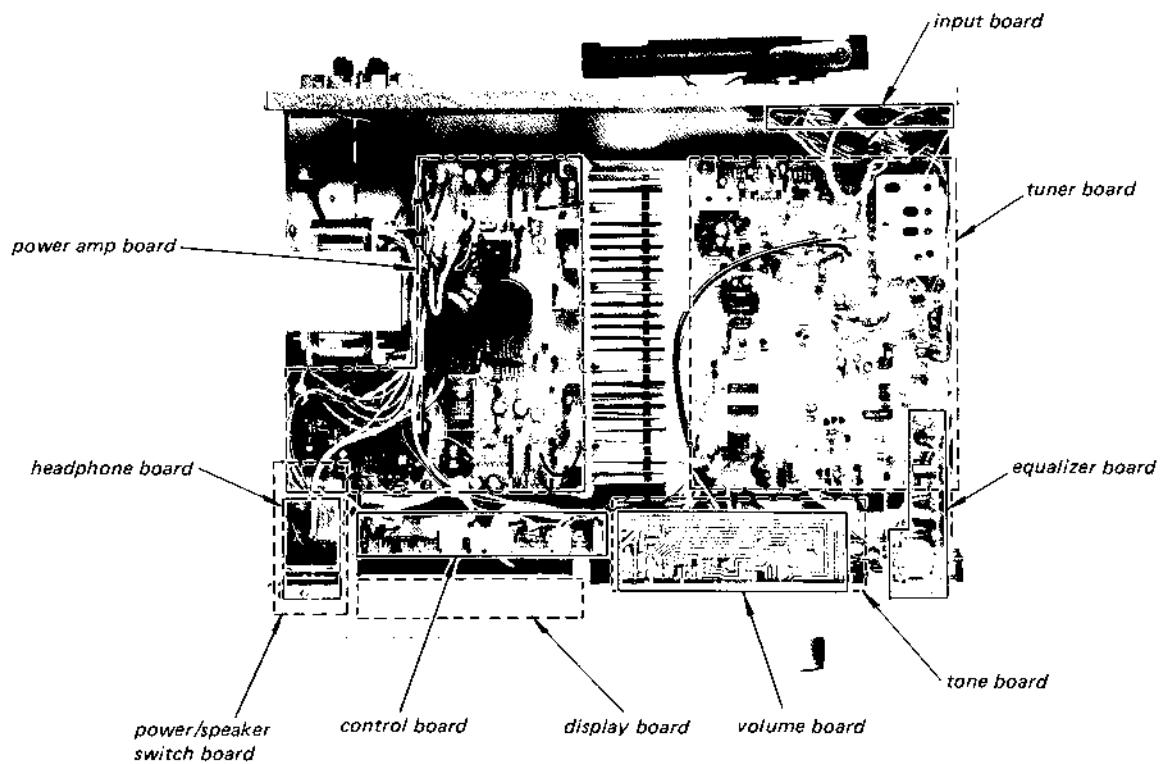

CONTROL BOARD REMOVAL


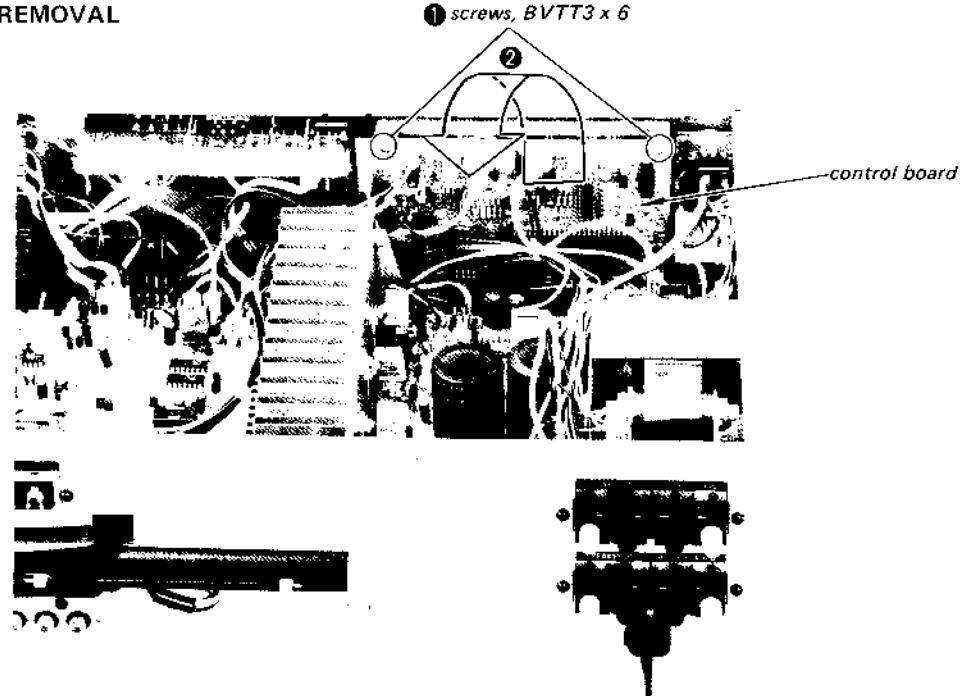


SECTION 3 ADJUSTMENTS


3-1. AMP SECTION

Note:


1. DC bias and DC balance adjustments should be made several minutes later after the POWER switch is turned on (POWER ON).
2. Make DC bias adjustment first.
3. Repeat DC bias and DC balance adjustments two or three times.
4. After replacing the power transistors, DC bias and DC balance adjustments should be made.

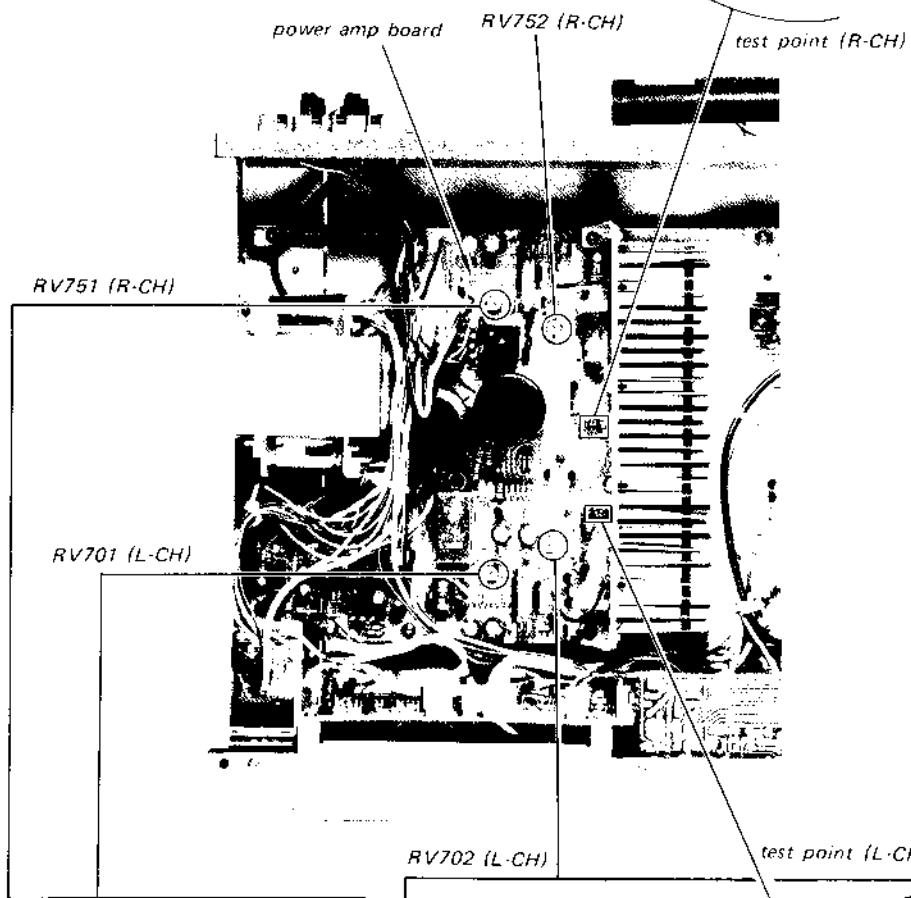DC Bias Adjustment

DC Balance Adjustment
(With no signal input)

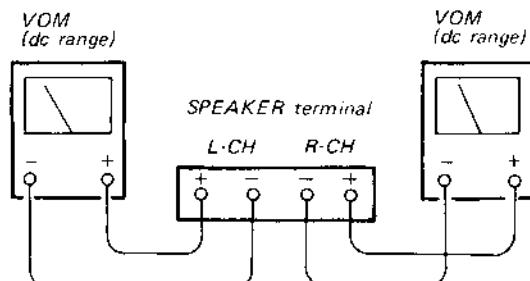- L-CH -R-CH
Adjust RV701 for 0V dc reading on VOM. Adjust RV751 for 0V dc reading on VOM.


DC Bias Adjustment
(With no signal input)

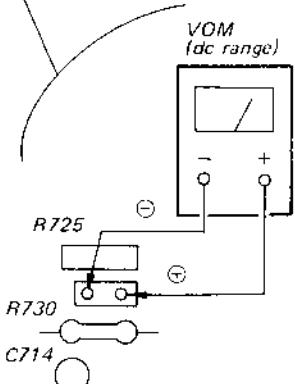
- L-CH
Adjust RV702 for 10 mV dc reading on VOM.



- R-CH-
Adjust RV752 for 10 mV dc reading on VOM.

3-2. FM SECTION

FM stereo standard signal	FM monaural standard signal
<p>Carrier frequency: 98 MHz Modulation: Audio 400Hz 16.25kHz deviation Sub channel 38kHz, 16.25kHz deviation Pilot signal 19kHz, 7.5kHz deviation</p>	<p>Carrier frequency: 98 MHz Modulation: 400 Hz, 40kHz deviation (100%)</p>

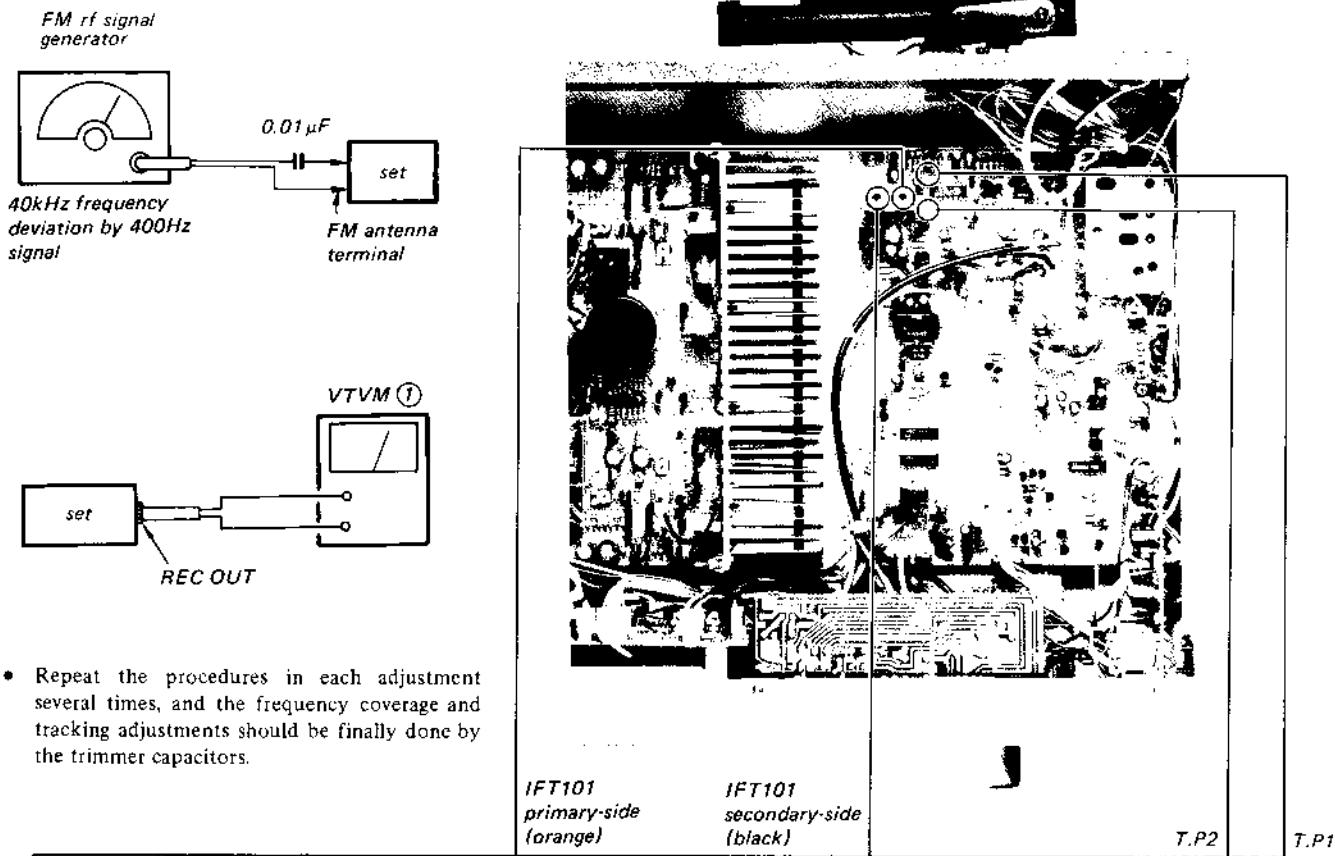


- Repeat the procedures in each adjustment several times, and the frequency coverage and tracking adjustments should be finally done by the trimmer capacitors.

FM DISCRIMINATOR (IFT101) ALIGNMENT 1 (PRIMARY-SIDE)

Setting:

FUNCTION switch: TUNER
FM/MW/LW switch: FM
MODE switch: MONO
TUNING switch: Detuned position

VOM
(range: 5V dc)

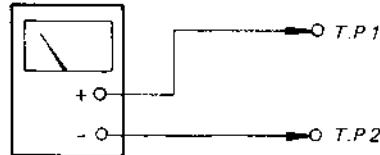

Procedure:

- Tune the set to 98MHz.
- Adjust the orange core (primary-side) of IFT101 for 0V reading on VOM.

Note: When replacing the ceramic filters (CF101–CF104), perform this alignment.


FM DISCRIMINATOR (IFT101) ALIGNMENT 2 (SECONDARY-SIDE)

Setting:

FUNCTION switch: TUNER
FM/MW/LW switch: FM
MODE switch: MONO

FM rf signal generator

distortion meter

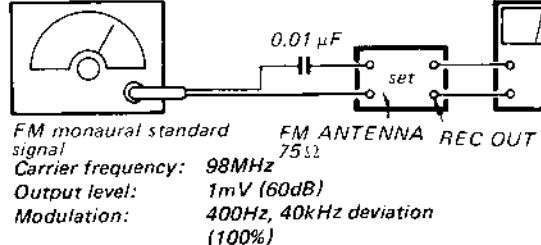


Procedure:

- Tune the set to 98MHz.
- Adjust the black core (secondary-side) of IFT101 for minimum distortion.

Note: Repeat the primary-side and secondary-side alignments several times.


FM MUTING LEVEL ADJUSTMENT**Setting:**

TUNING LEVEL-LOW switch: ON

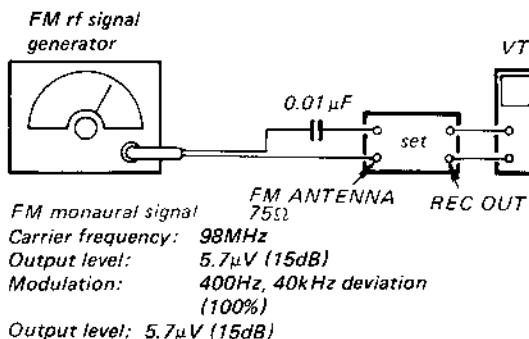**Procedure:**

- Push TUNING switches and tune the set to 98 MHz.
- Turn RT103 and set it at the point just when the VTVM indication drops to 0 V.


RT103

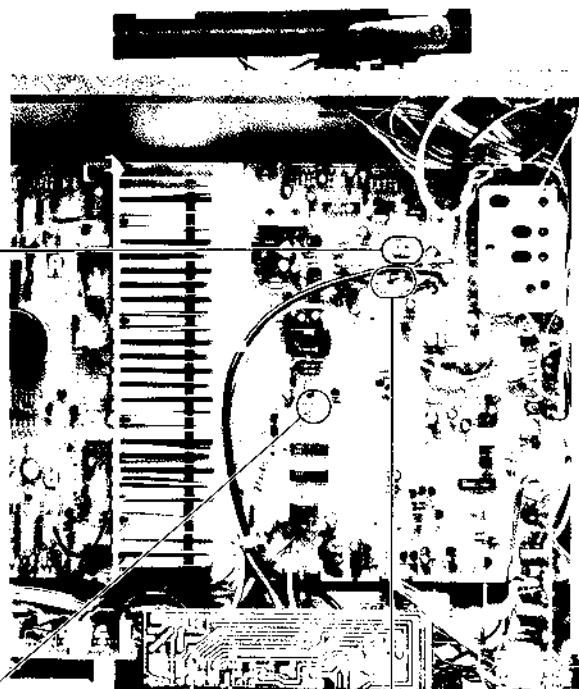

RT102

FM TUNING LEVEL ADJUSTMENT**Setting:**

TUNING LEVEL-HIGH switch: ON

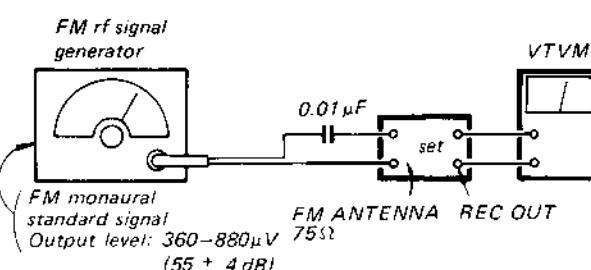**Procedure:**


By varying the output level of the FM signal generator from 360 μ V (51 dB) to 880 μ V (59 dB), adjust RT102 so that the frequency scanning stops (observing the frequency counter of the set).

RT101

SIGNAL INDICATOR ADJUSTMENT

FM rf signal generator

FM monaural standard signal (No modulation)
Output level: 0.32 mV (50 dB)

SIGNAL STRENGTH**Procedure:**


- Tune the set to 98MHz.
- Adjust RT101 for all five LEDs of SIGNAL STRENGTH indicator lighting.

VCO ADJUSTMENT

Setting:

FUNCTION switch: TUNER
 FM/MW/LW switch: FM
 MODE switch: MONO

A) Regular Method

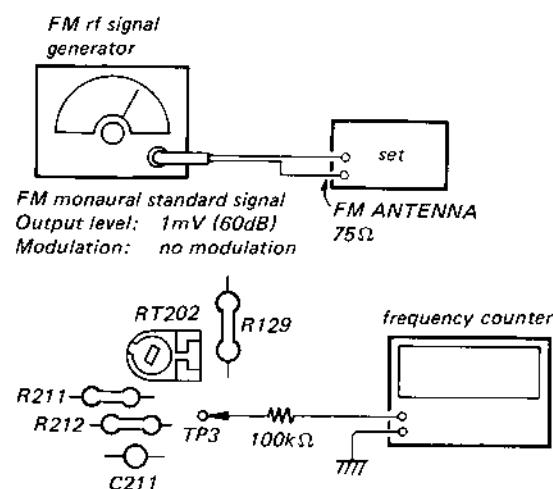

Procedure:



1. Tune the set to 98MHz.
2. Adjust RT202 for $76\text{kHz} \pm 100\text{Hz}$ reading on the frequency counter.

B) Simple Method

Procedure:

1. Tune the set to the FM stereo broadcasting signal.
2. Turn RT202 clockwise or counterclockwise and memorize the lighting-up ranges of STEREO lamp.


3. Secure RT202 at the center of the lighting-up range of both turns as shown below.

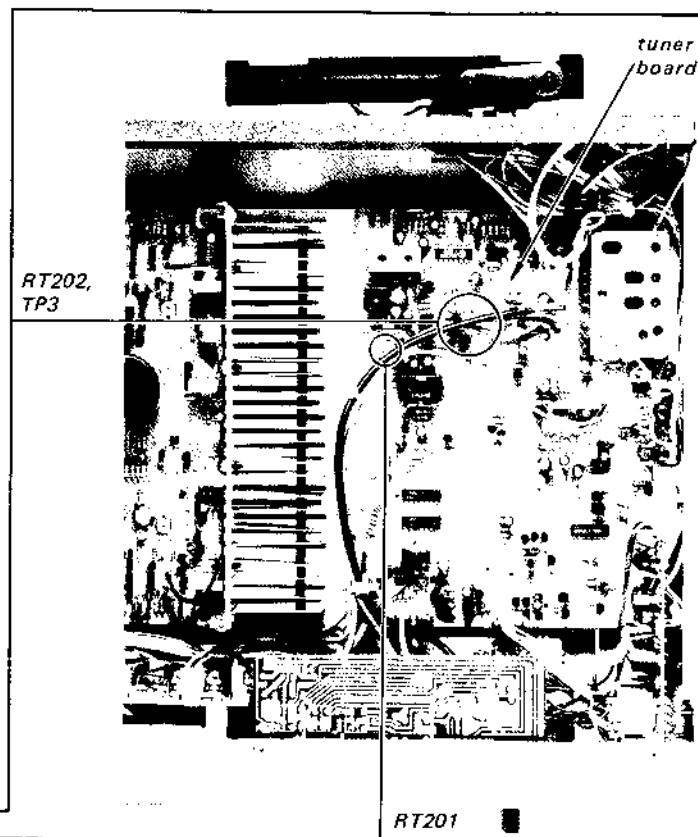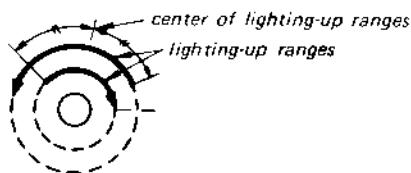

FM STEREO SEPARATION ADJUSTMENT

Setting:

FUNCTION switch: TUNER
 FM/MW/LW switch: FM
 MODE switch: STEREO/FM-AM
 MUTING

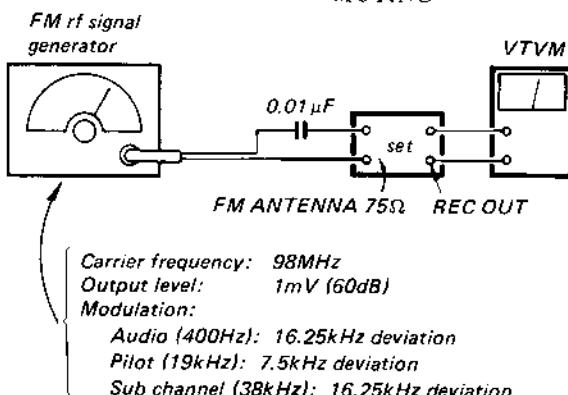

Procedure:


FM stereo signal generator output channel	VTVM connection	VTVM reading (dB)
L-CH	L-CH	(A)
R-CH	L-CH	(B) Adjust RT301 resistor for minimum reading.
R-CH	R-CH	(C)
L-CH	R-CH	(D) Adjust RT301 resistor for minimum reading.

L-CH Stereo Separation: (A) - (B)
 R-CH Stereo Separation: (C) - (D)

The separations of both channels should be equal.

PLL ADJUSTMENT**Setting:**

FM/MW/LW switch: FM

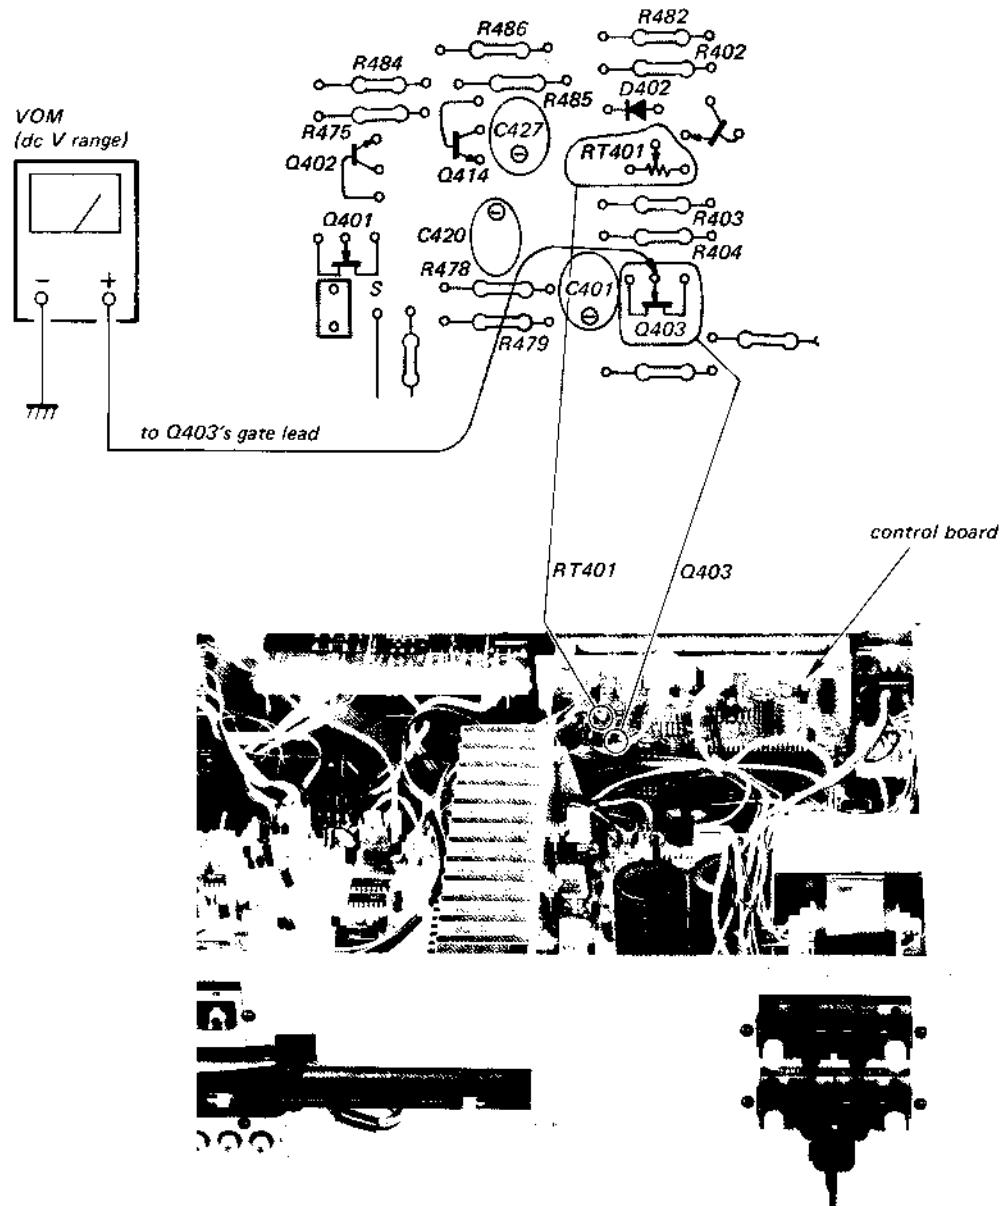Setting Up and Adjustment Location:**Procedure:**



1. Tune the set to 98MHz.
2. Turn RT401 to its clockwise stop.
3. Turn RT401 counterclockwise to obtain 1.8V dc at the gate lead of Q403.

3-3. AM SECTION

MW Section

Setting:

FUNCTION switch TUNER
FM/MW/LW switch: MW

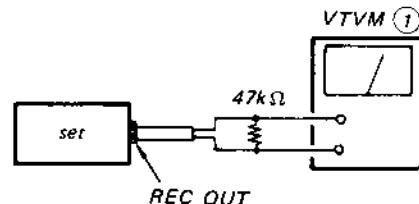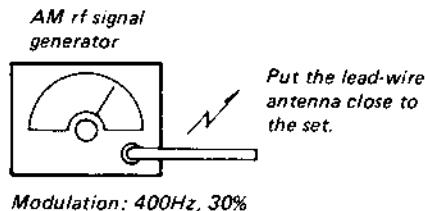



- Repeat the procedures in each adjustment several times, and the frequency coverage and tracking adjustments should be finally done by the trimmer capacitors.


AM I-F ALIGNMENT

When IFT301 through 303 are replaced, they do not need readjustment since they have been factory-adjusted.


MW FREQUENCY COVERAGE ADJUSTMENT

Frequency Dial Indication	1,602kHz	522kHz
VOM reading	22V	1.5V
Adjust	CT304	L303

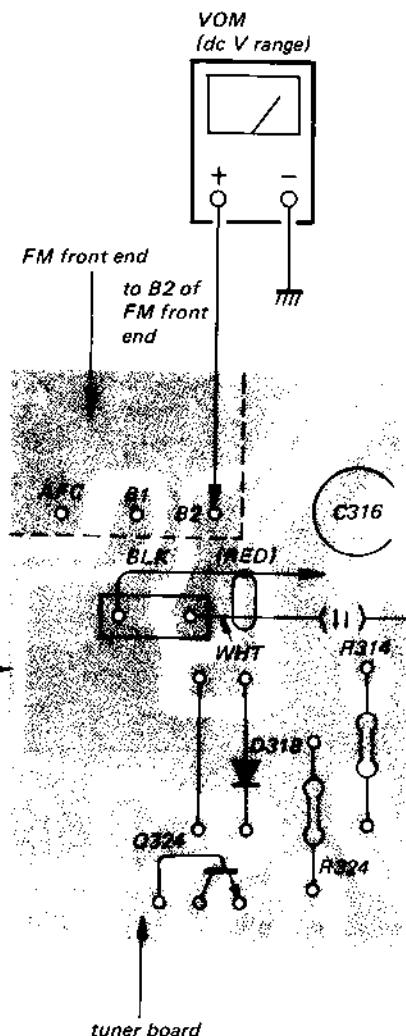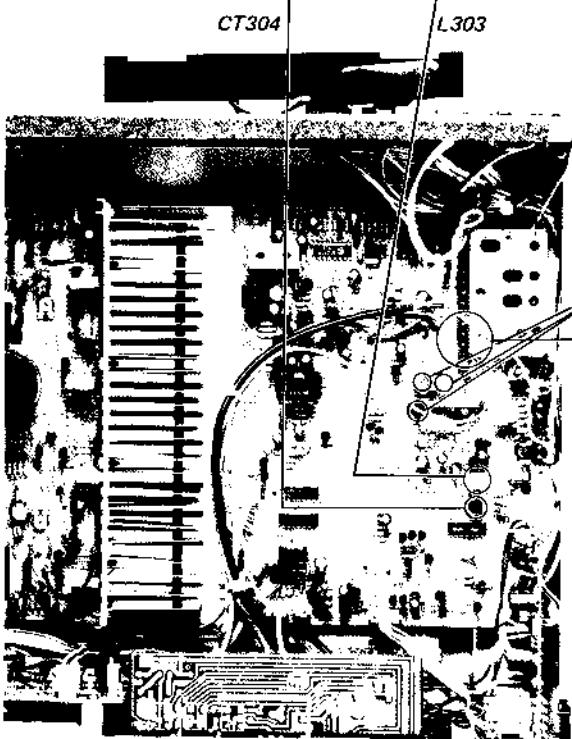

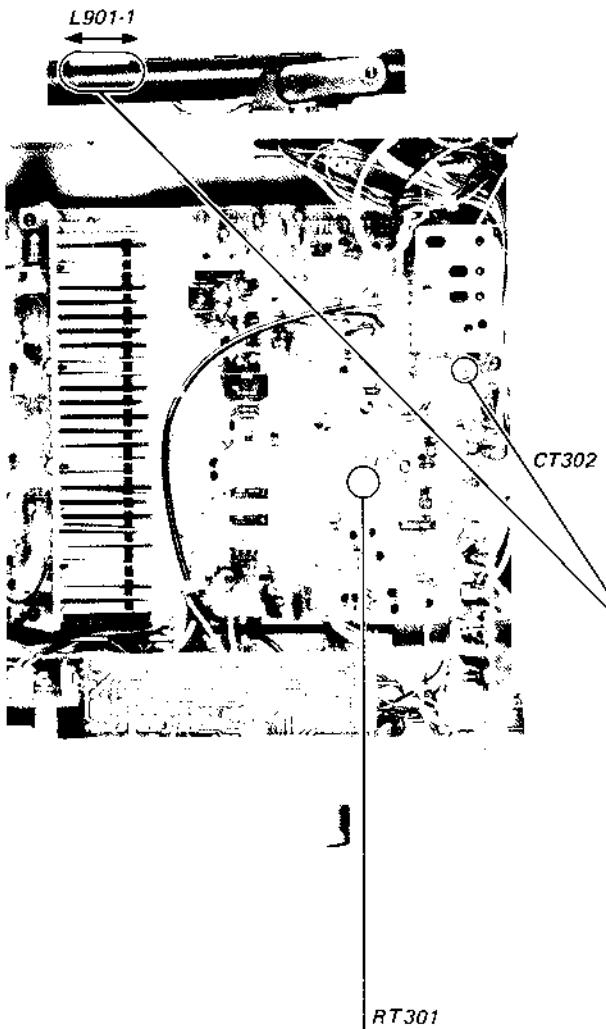

MW TRACKING ADJUSTMENT

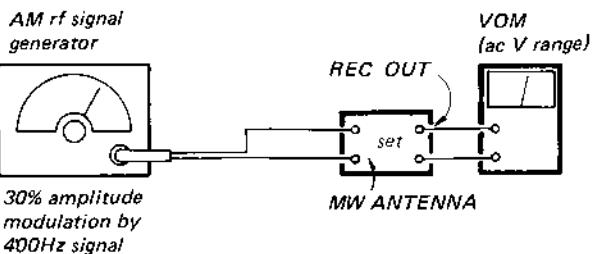

Output level: 30 – 100 μ V (30 – 40dB)
Carrier frequency: 603kHz or 1,404kHz

Procedure:

Tune the set to the frequency of AM rf signal generator and adjust L901-1 and CT302 for maximum reading on the VOM.


	AM Rf Signal Generator Frequency	Adjust	VOM Reading
1	603kHz	L901-1	maximum
2	1,404kHz	CT302	

Note: Repeat the above adjustment several times ending with CT302.

TUNING LEVEL ADJUSTMENT

Setting:


TUNING LEVEL LOW switch: ON

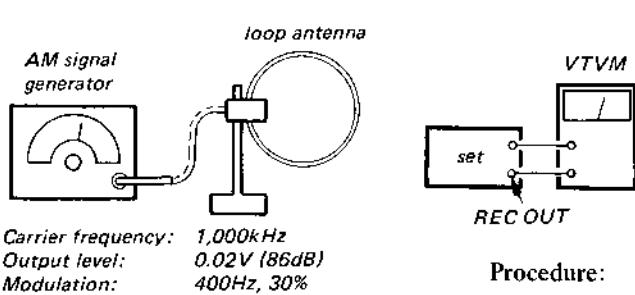


Procedure:


1. Place the loop antenna at a distance of 60cm (23 $\frac{1}{2}$ ") away from the ferrite-rod antenna in the set.
2. Turn RT301 until the VTVM indication drops to 0V with the output level of AM signal generator of 86 ± 4 dB.

LW Section

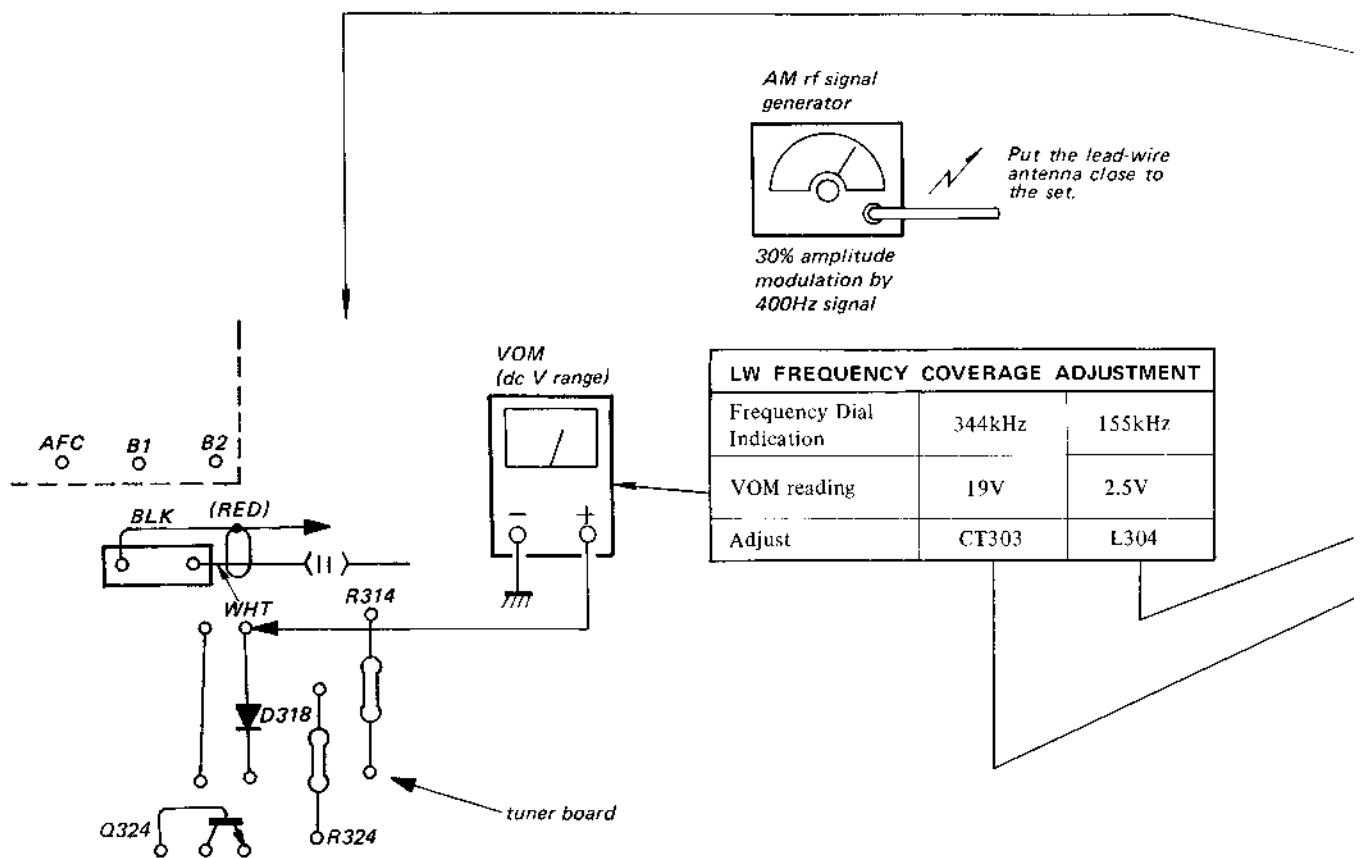

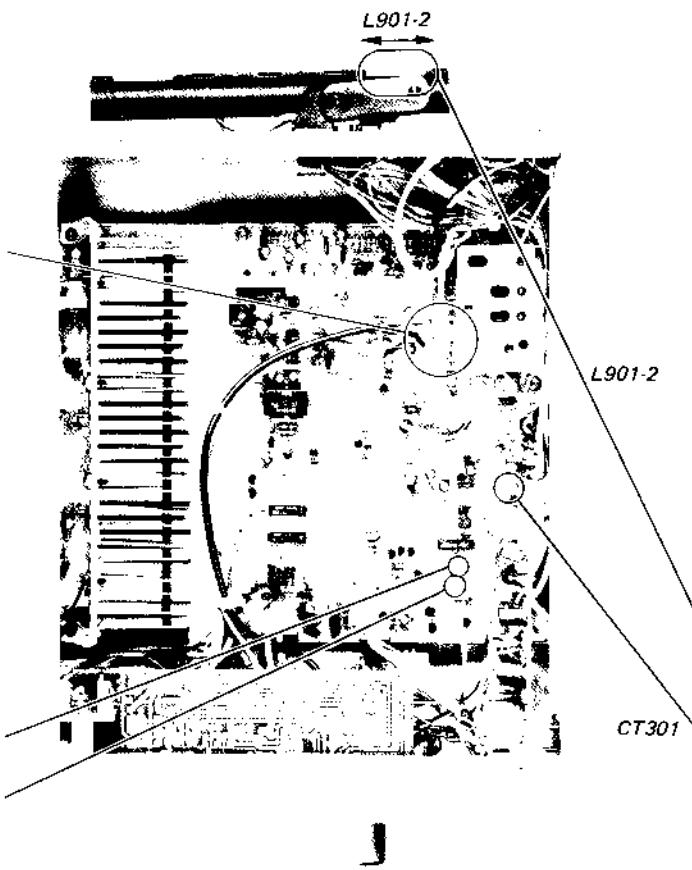

LW TRACKING ADJUSTMENT

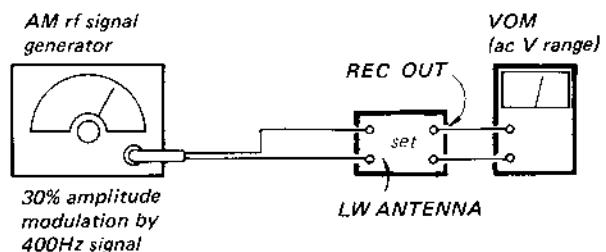

*Output level: 30 – 100 μ V (30 – 40dB)
Carrier frequency: 173kHz or 308kHz*

Procedure:

Tune the set to the frequency of AM rf signal generator and adjust L901-2 and CT301 for maximum reading on the VOM.


	AM Rf Signal Generator Frequency	Adjust	VOM Reading
1	173kHz	L901-2	
2	308kHz	CT301	maximum

Note: Repeat the above adjustment several times ending with CT301.




STR-V45L

A | B | C | D | E | F | G | H

Note:
• Color code of sleeving over the end of the jacket.




- : indicates side identified with part number.
- : B+ pattern
- : signal path
- : L-CH signal path
- : R-CH signal path

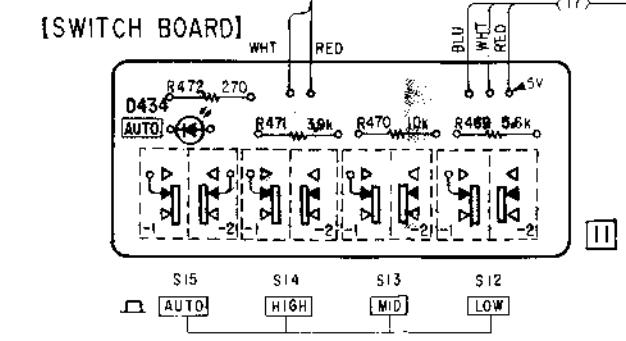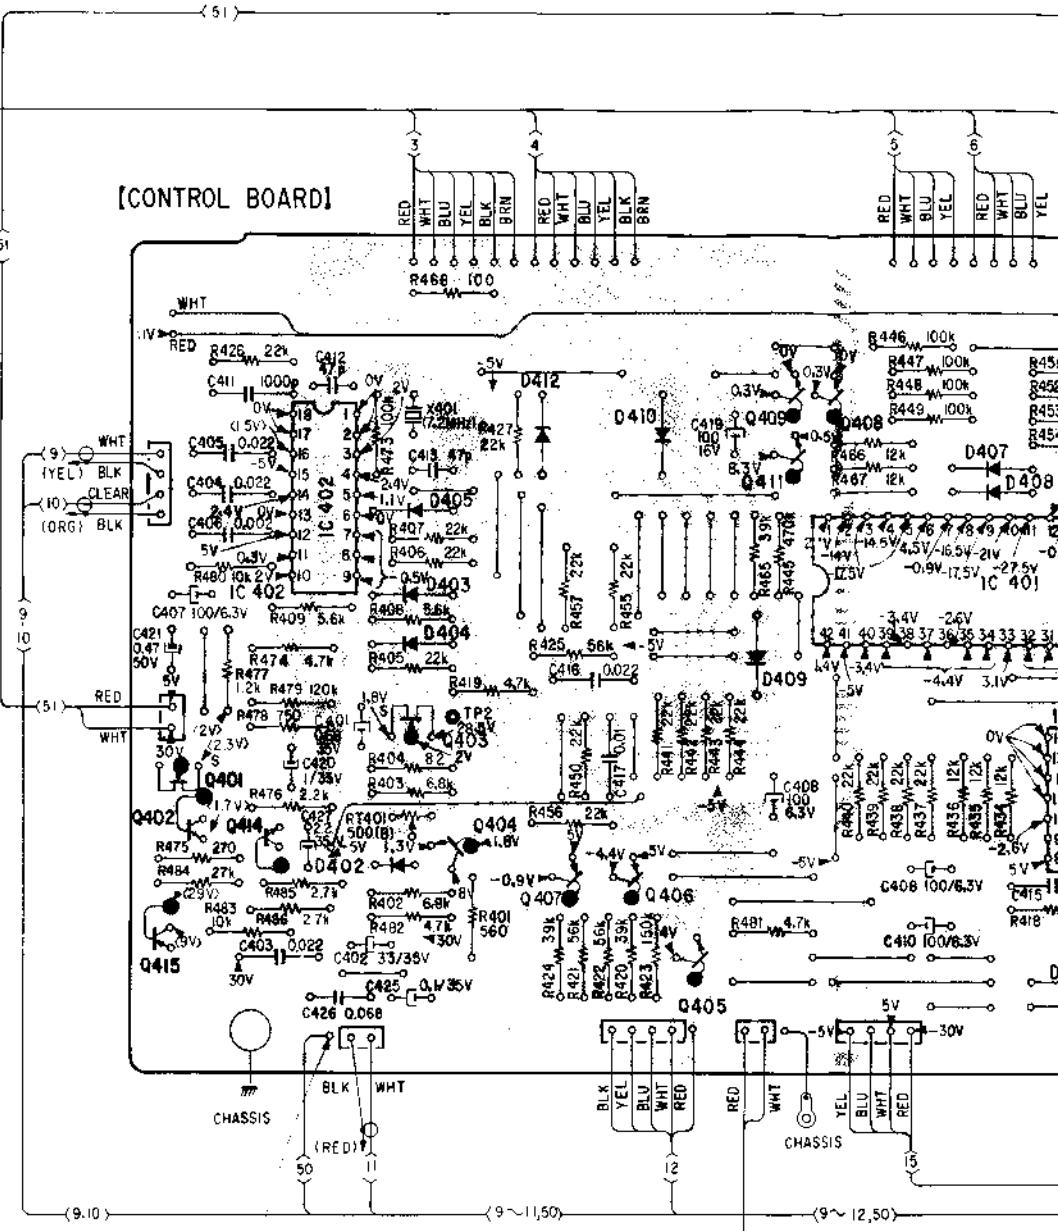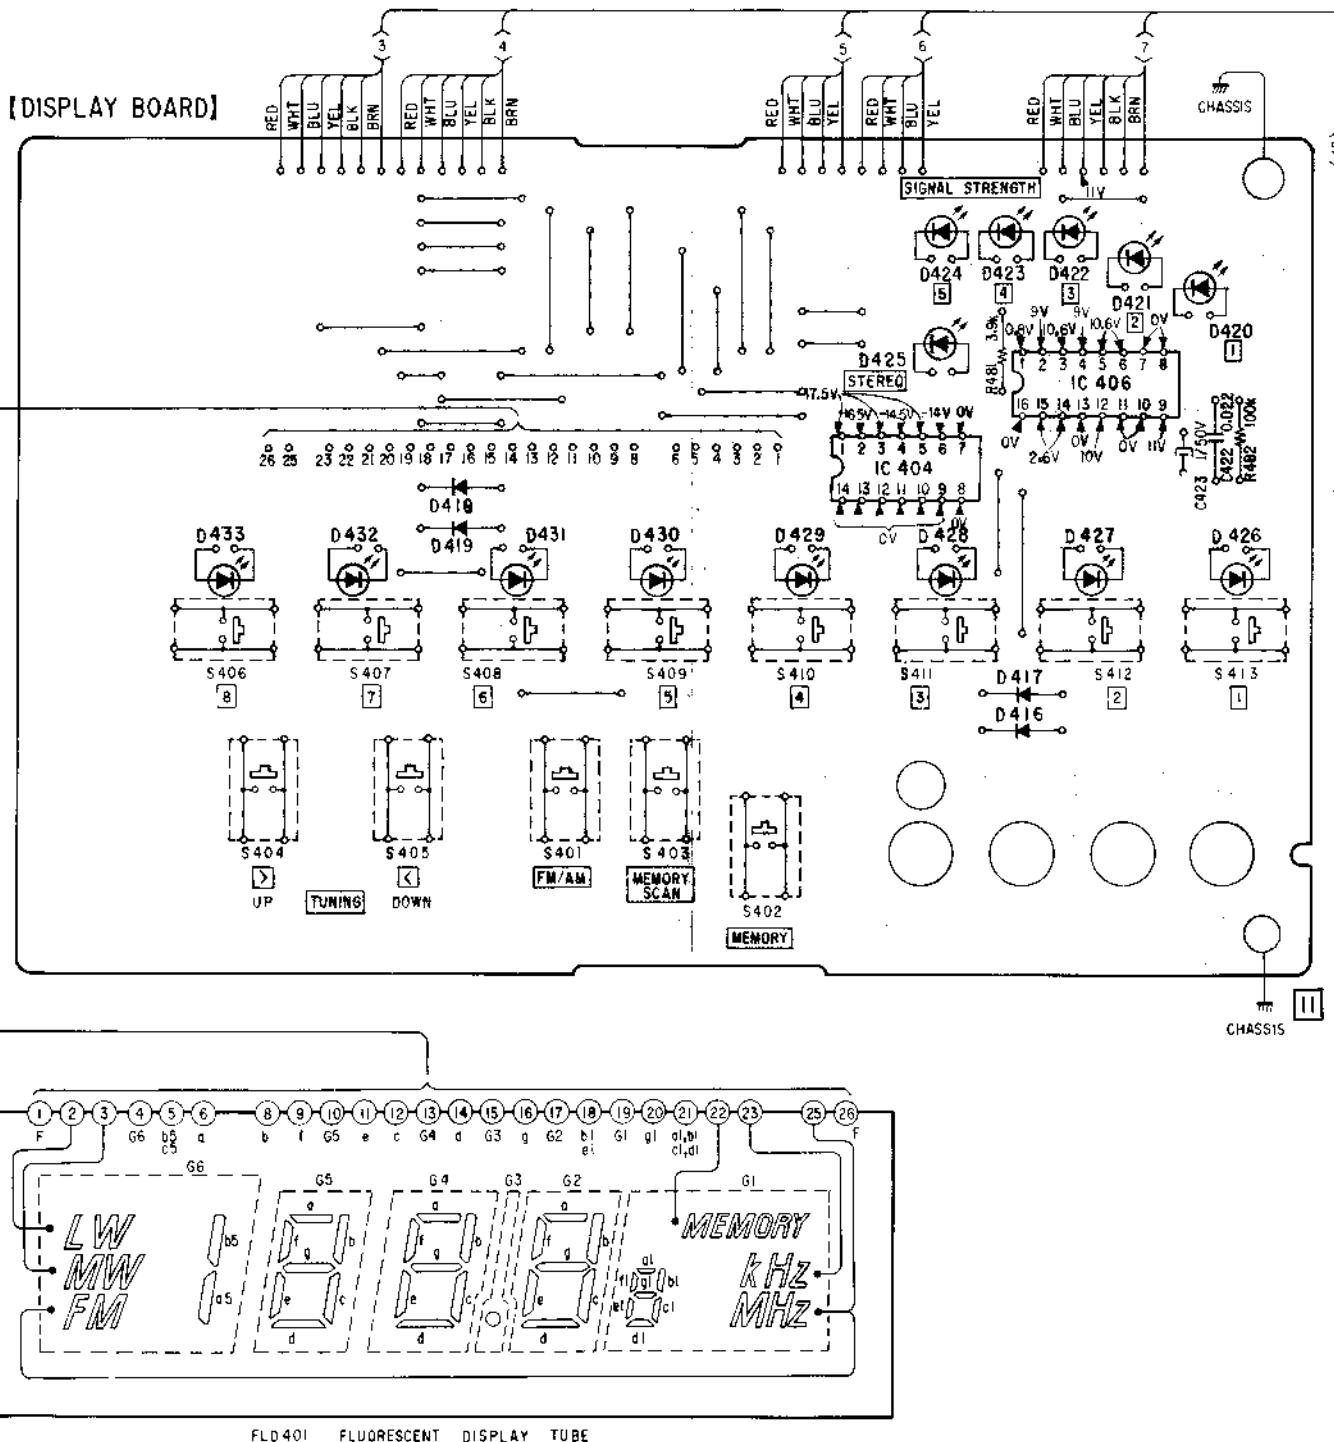

5


Q		IC404	IC 406	IC 402	409
IC				401 404	411 408
D	433 432 418 431 419	430 429 424 425 428	423 424 421 420	403 405 406 407 404	405 406 407 408 409


STR-V45L STR-V45L

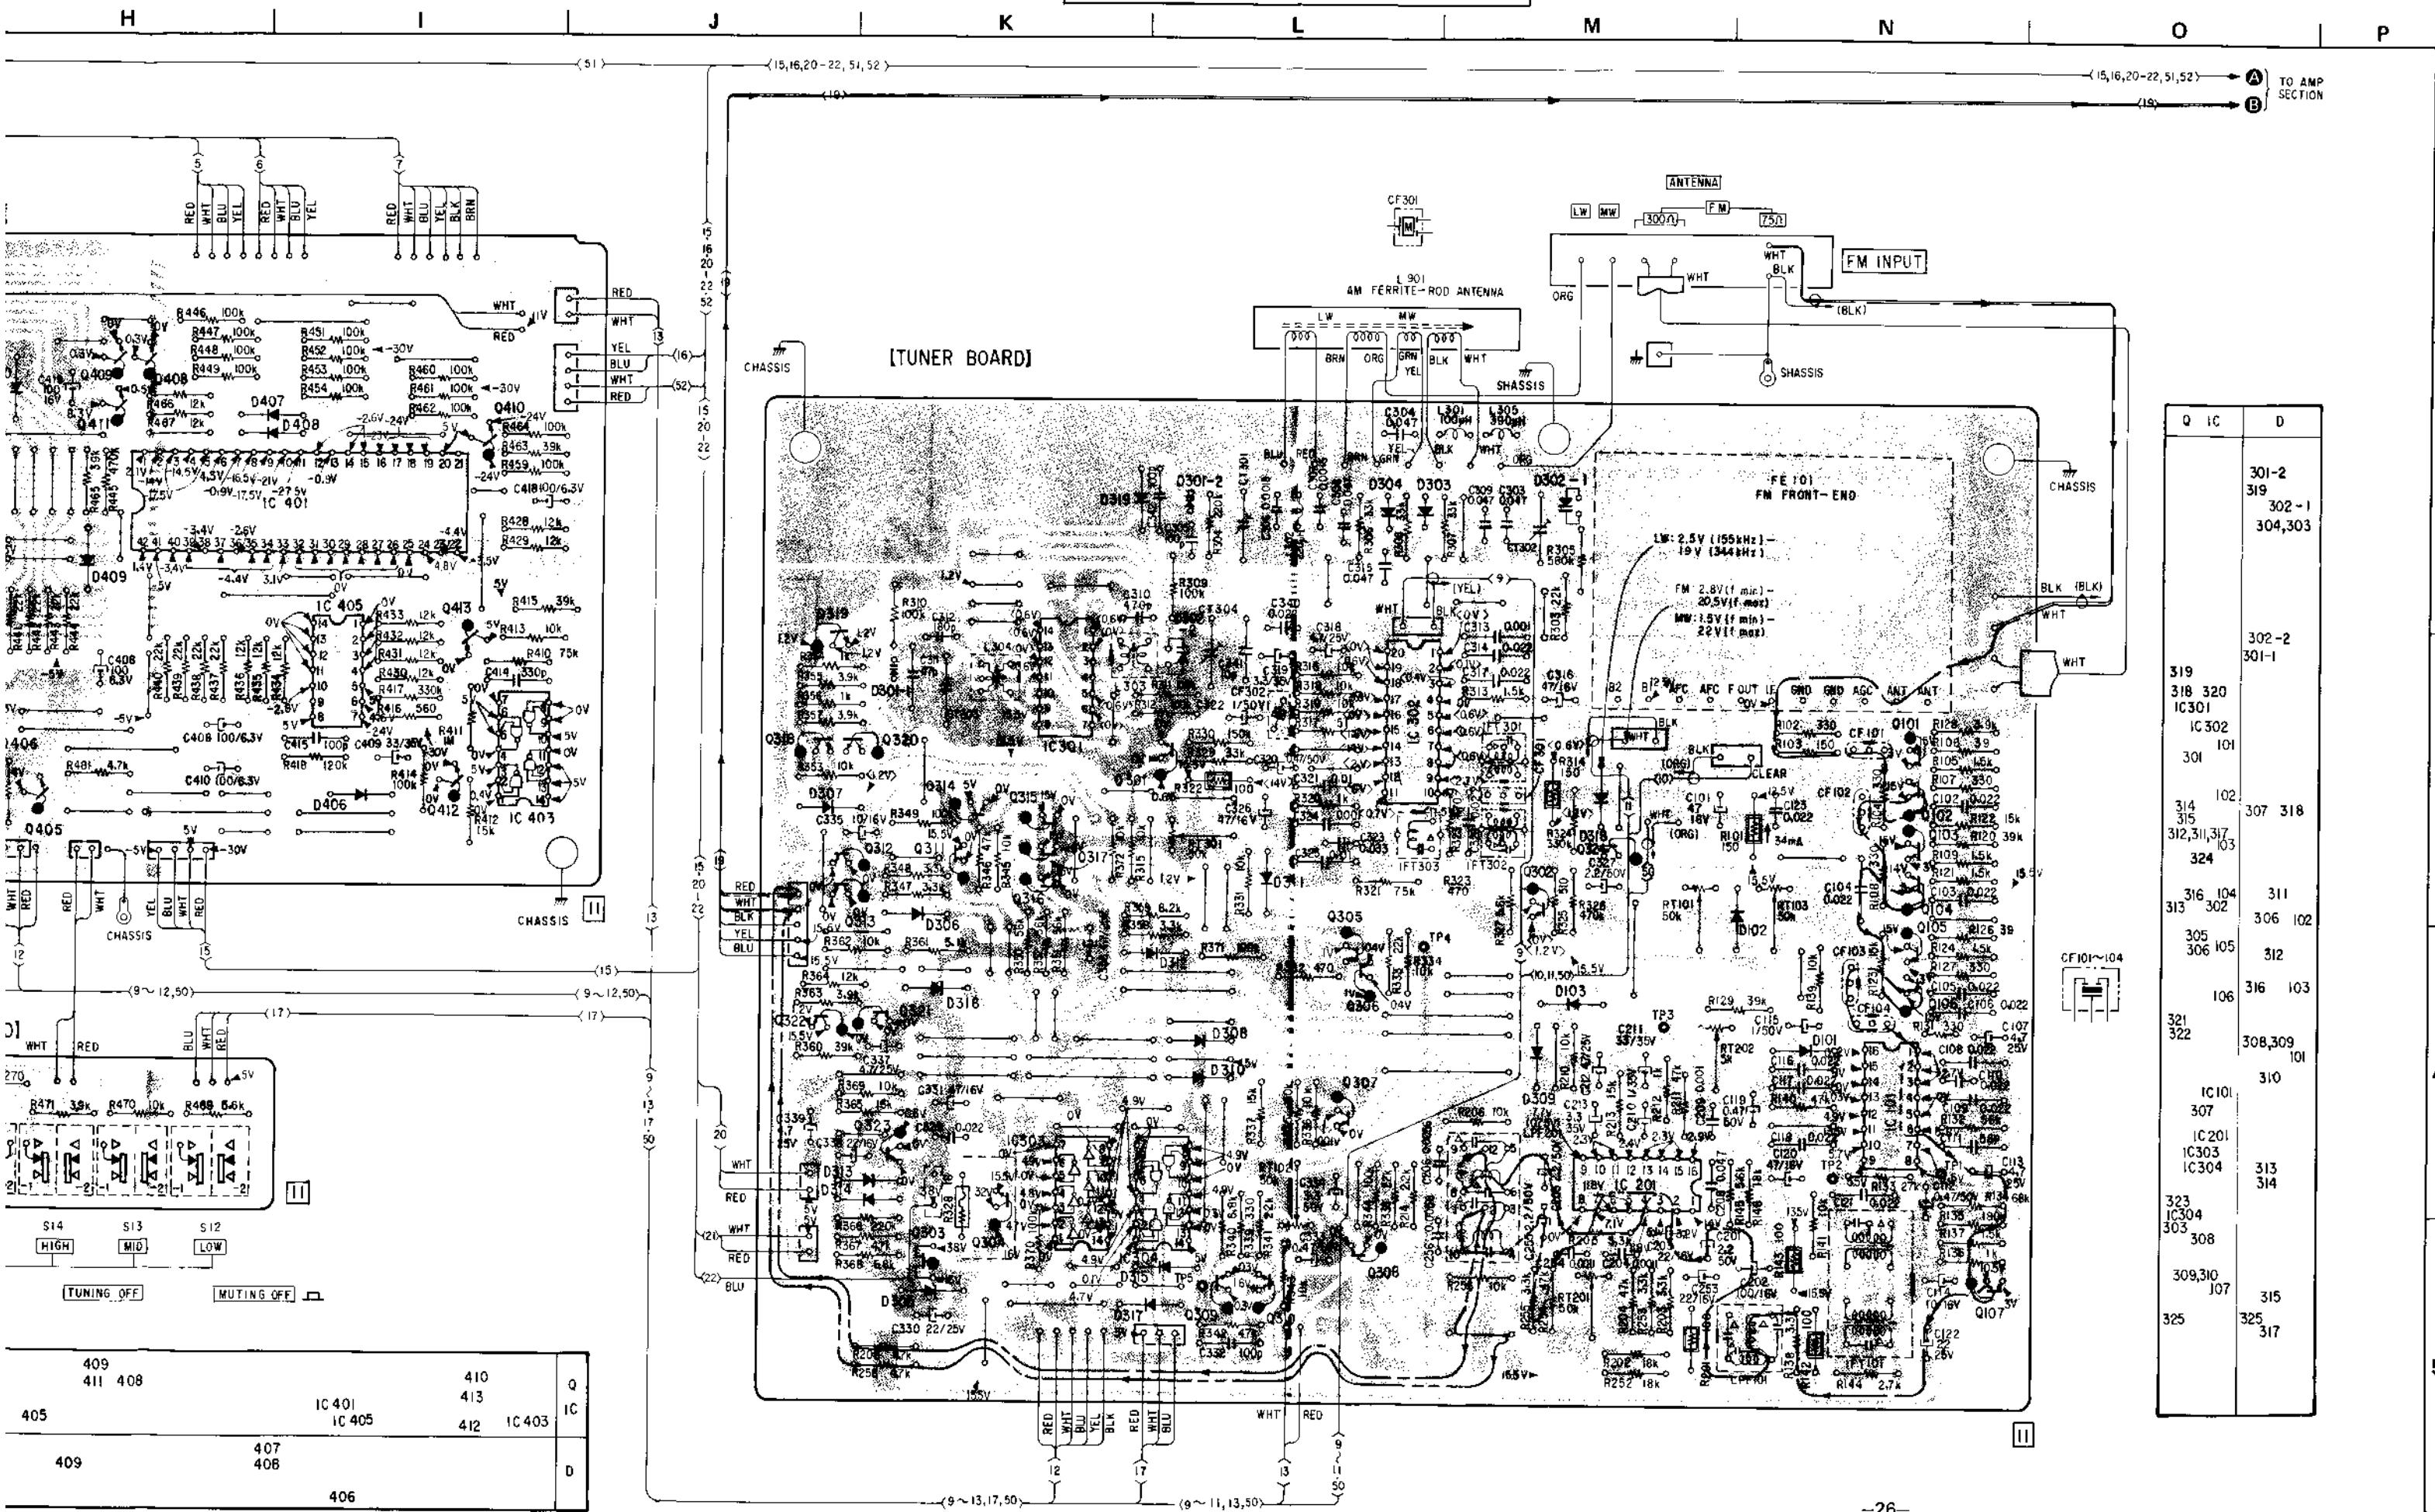

4-2. SCHEMATIC DIAGRAM – Tuner Section –

STR-V45L STR-V45L

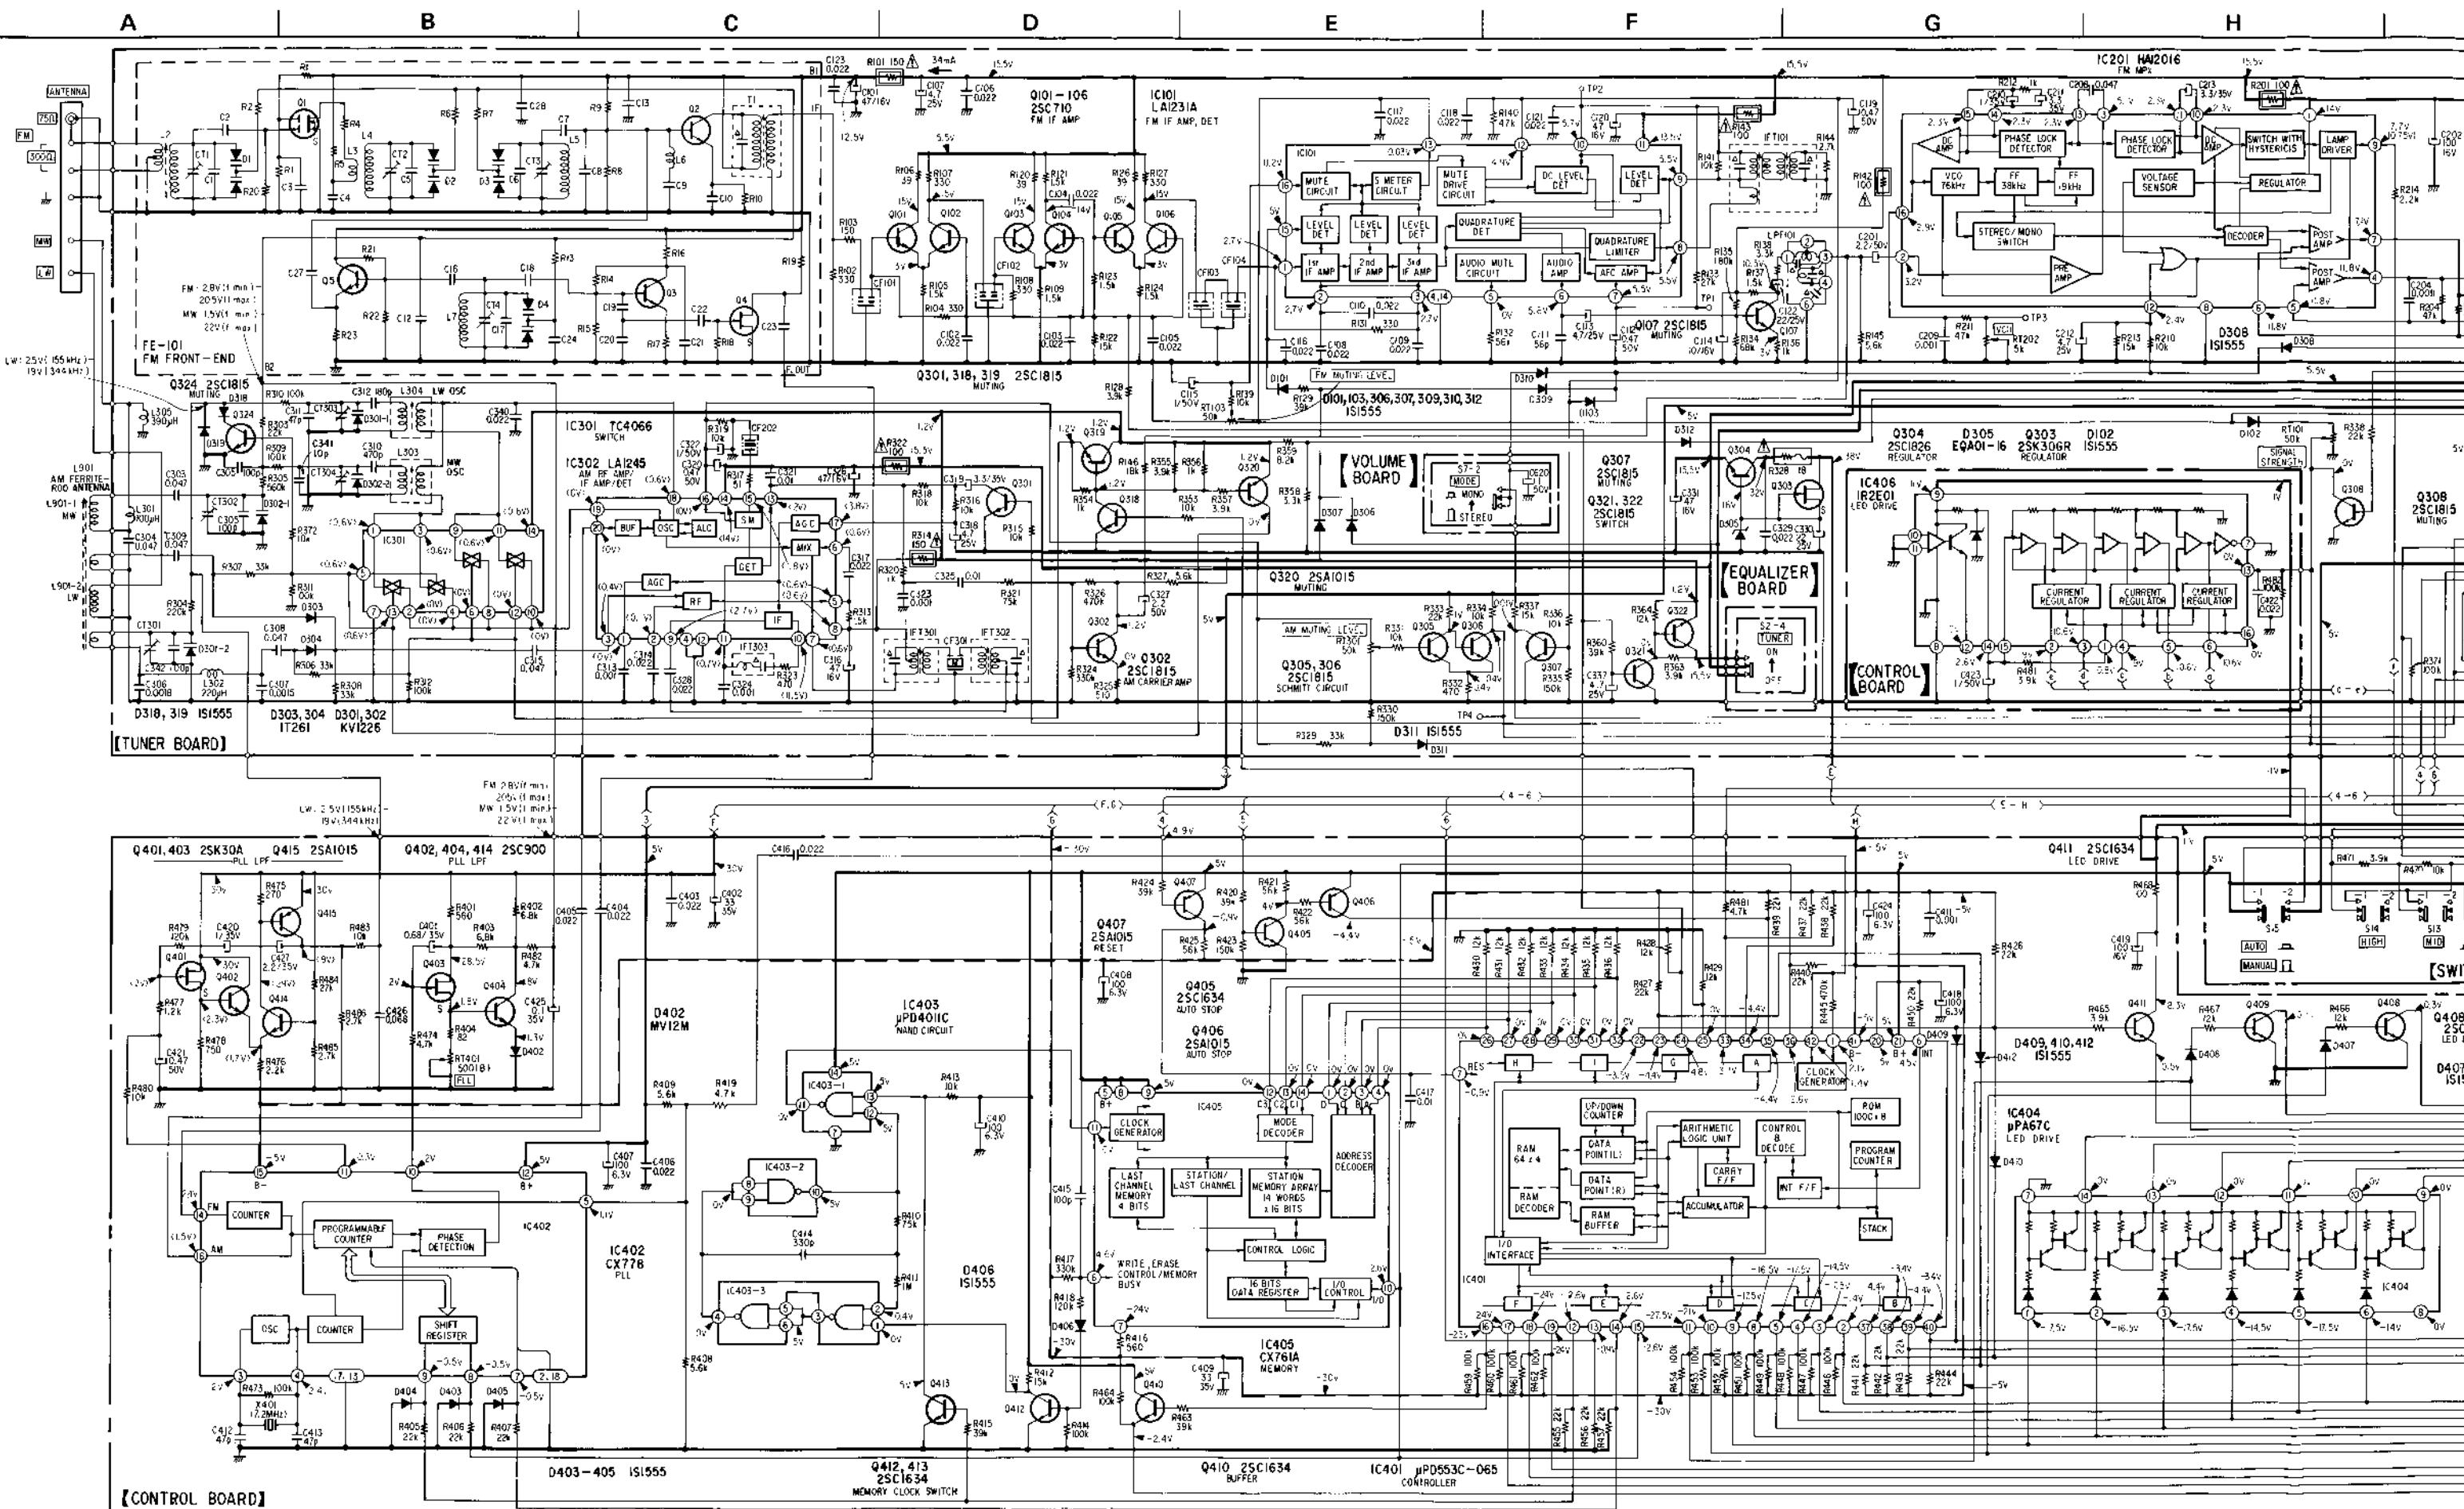

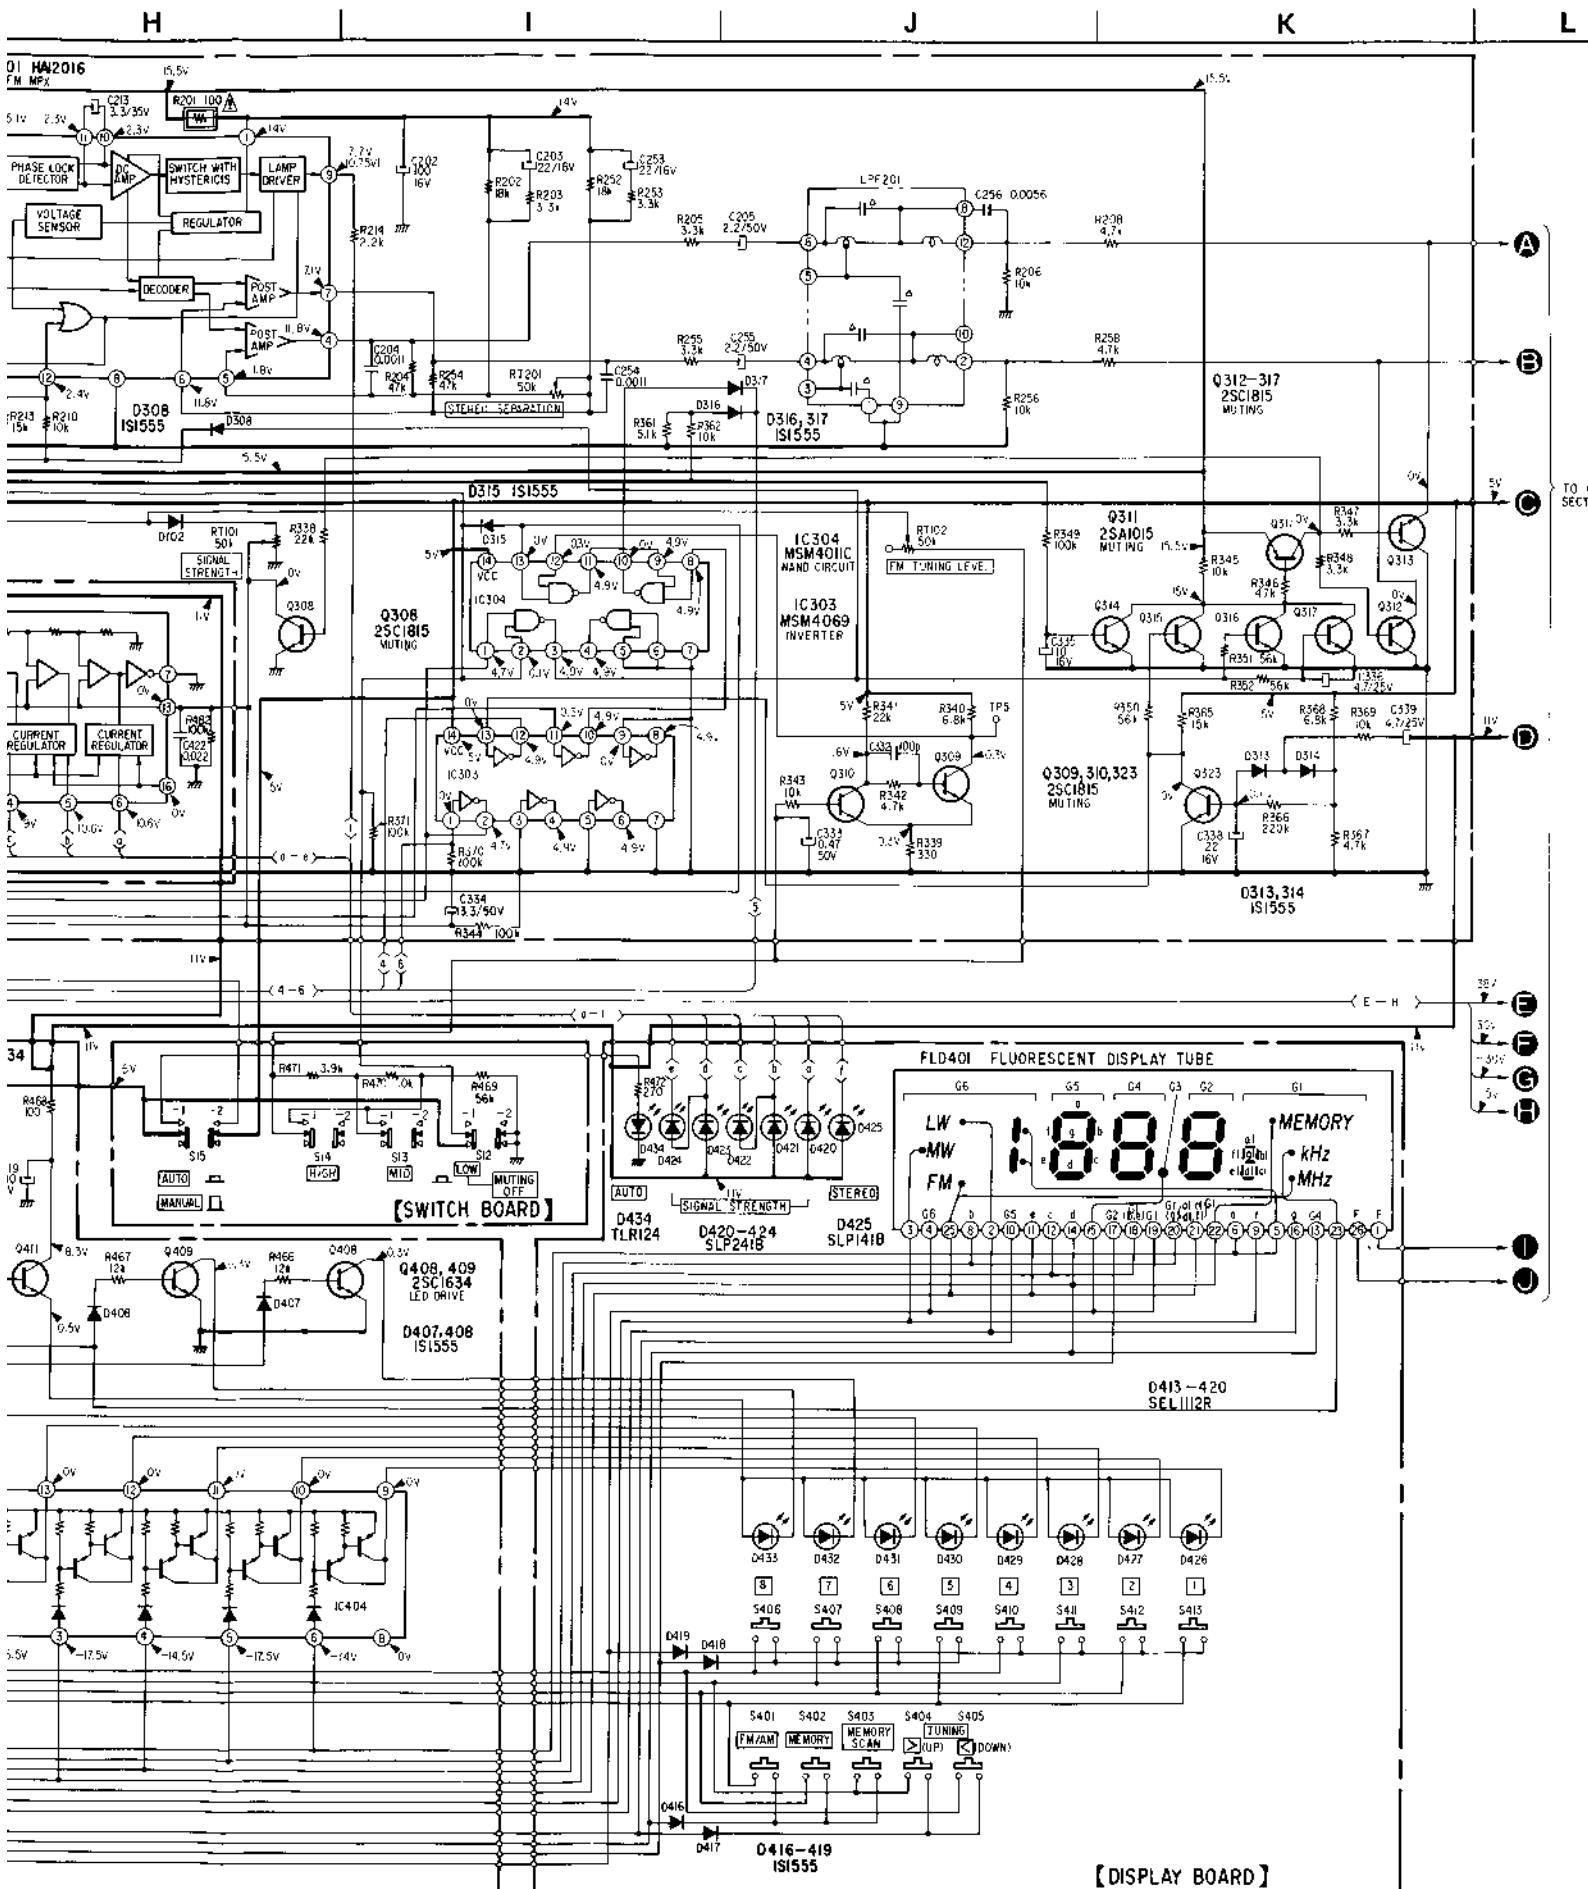

Note:

- All capacitors are in μF unless otherwise noted. pF : μF 50WV or less are not indicated except for electrolytics.
- All resistors are in ohms, $\frac{1}{2}\text{W}$ unless otherwise noted. $\text{k}\Omega$: 1000 Ω , $\text{M}\Omega$: 1000 k Ω
- \triangle : internal component.
- \square : panel designation.
- \square : adjustment for repair.
- $-$: B+ bus.
- $--$: B- bus.
- Voltages are dc with respect to ground unless otherwise noted.
- Voltage variations may be noted due to normal production tolerances.
- Readings are taken under no-signal (detuned) conditions with a VOM (20 k Ω /V).

II : FM STEREO

I : AM

no mark : FM

: signal path



• Switch

Ref. No.	Switch	Position
S2	FUNCTION TUNER	OFF
S7	MODE	STEREO
S12-15	TUNING LEVEL	MANUAL
S401	FM/MW/LW	FM
S402	MEMORY	OFF
S403	MEMORY SCAN	OFF
S404	TUNING (UP)	OFF
S405	TUNING (DOWN)	OFF
S406--413	preset (1-8)	OFF




Note: The components identified by shading and mark \triangle are critical for safety. Replace only with part number specified.

Semiconductor Lead Layouts:



2SA1015

2SK30-GR
2SK30A
2SK30A-GR3



MV12N

2SC710
2SC710-14CX761A
 $\mu\text{PD}553\text{C}065$ 


TLR124

2SC900
2SC1362
2SC1364
2SC1634
2SC1815



CX778

EQA01-16
EQB01-16


HA12016




2SC1826

IR2E01
LA1231
LA1231A
LA1245

2SC1986




SEL1112R

1S1555
1T26
1T261SLP141B
SLP241B


4-3. MOUNTING DIAGRAM – Amp Section –

– Conductor Side –


STR-V45L STR-V45L

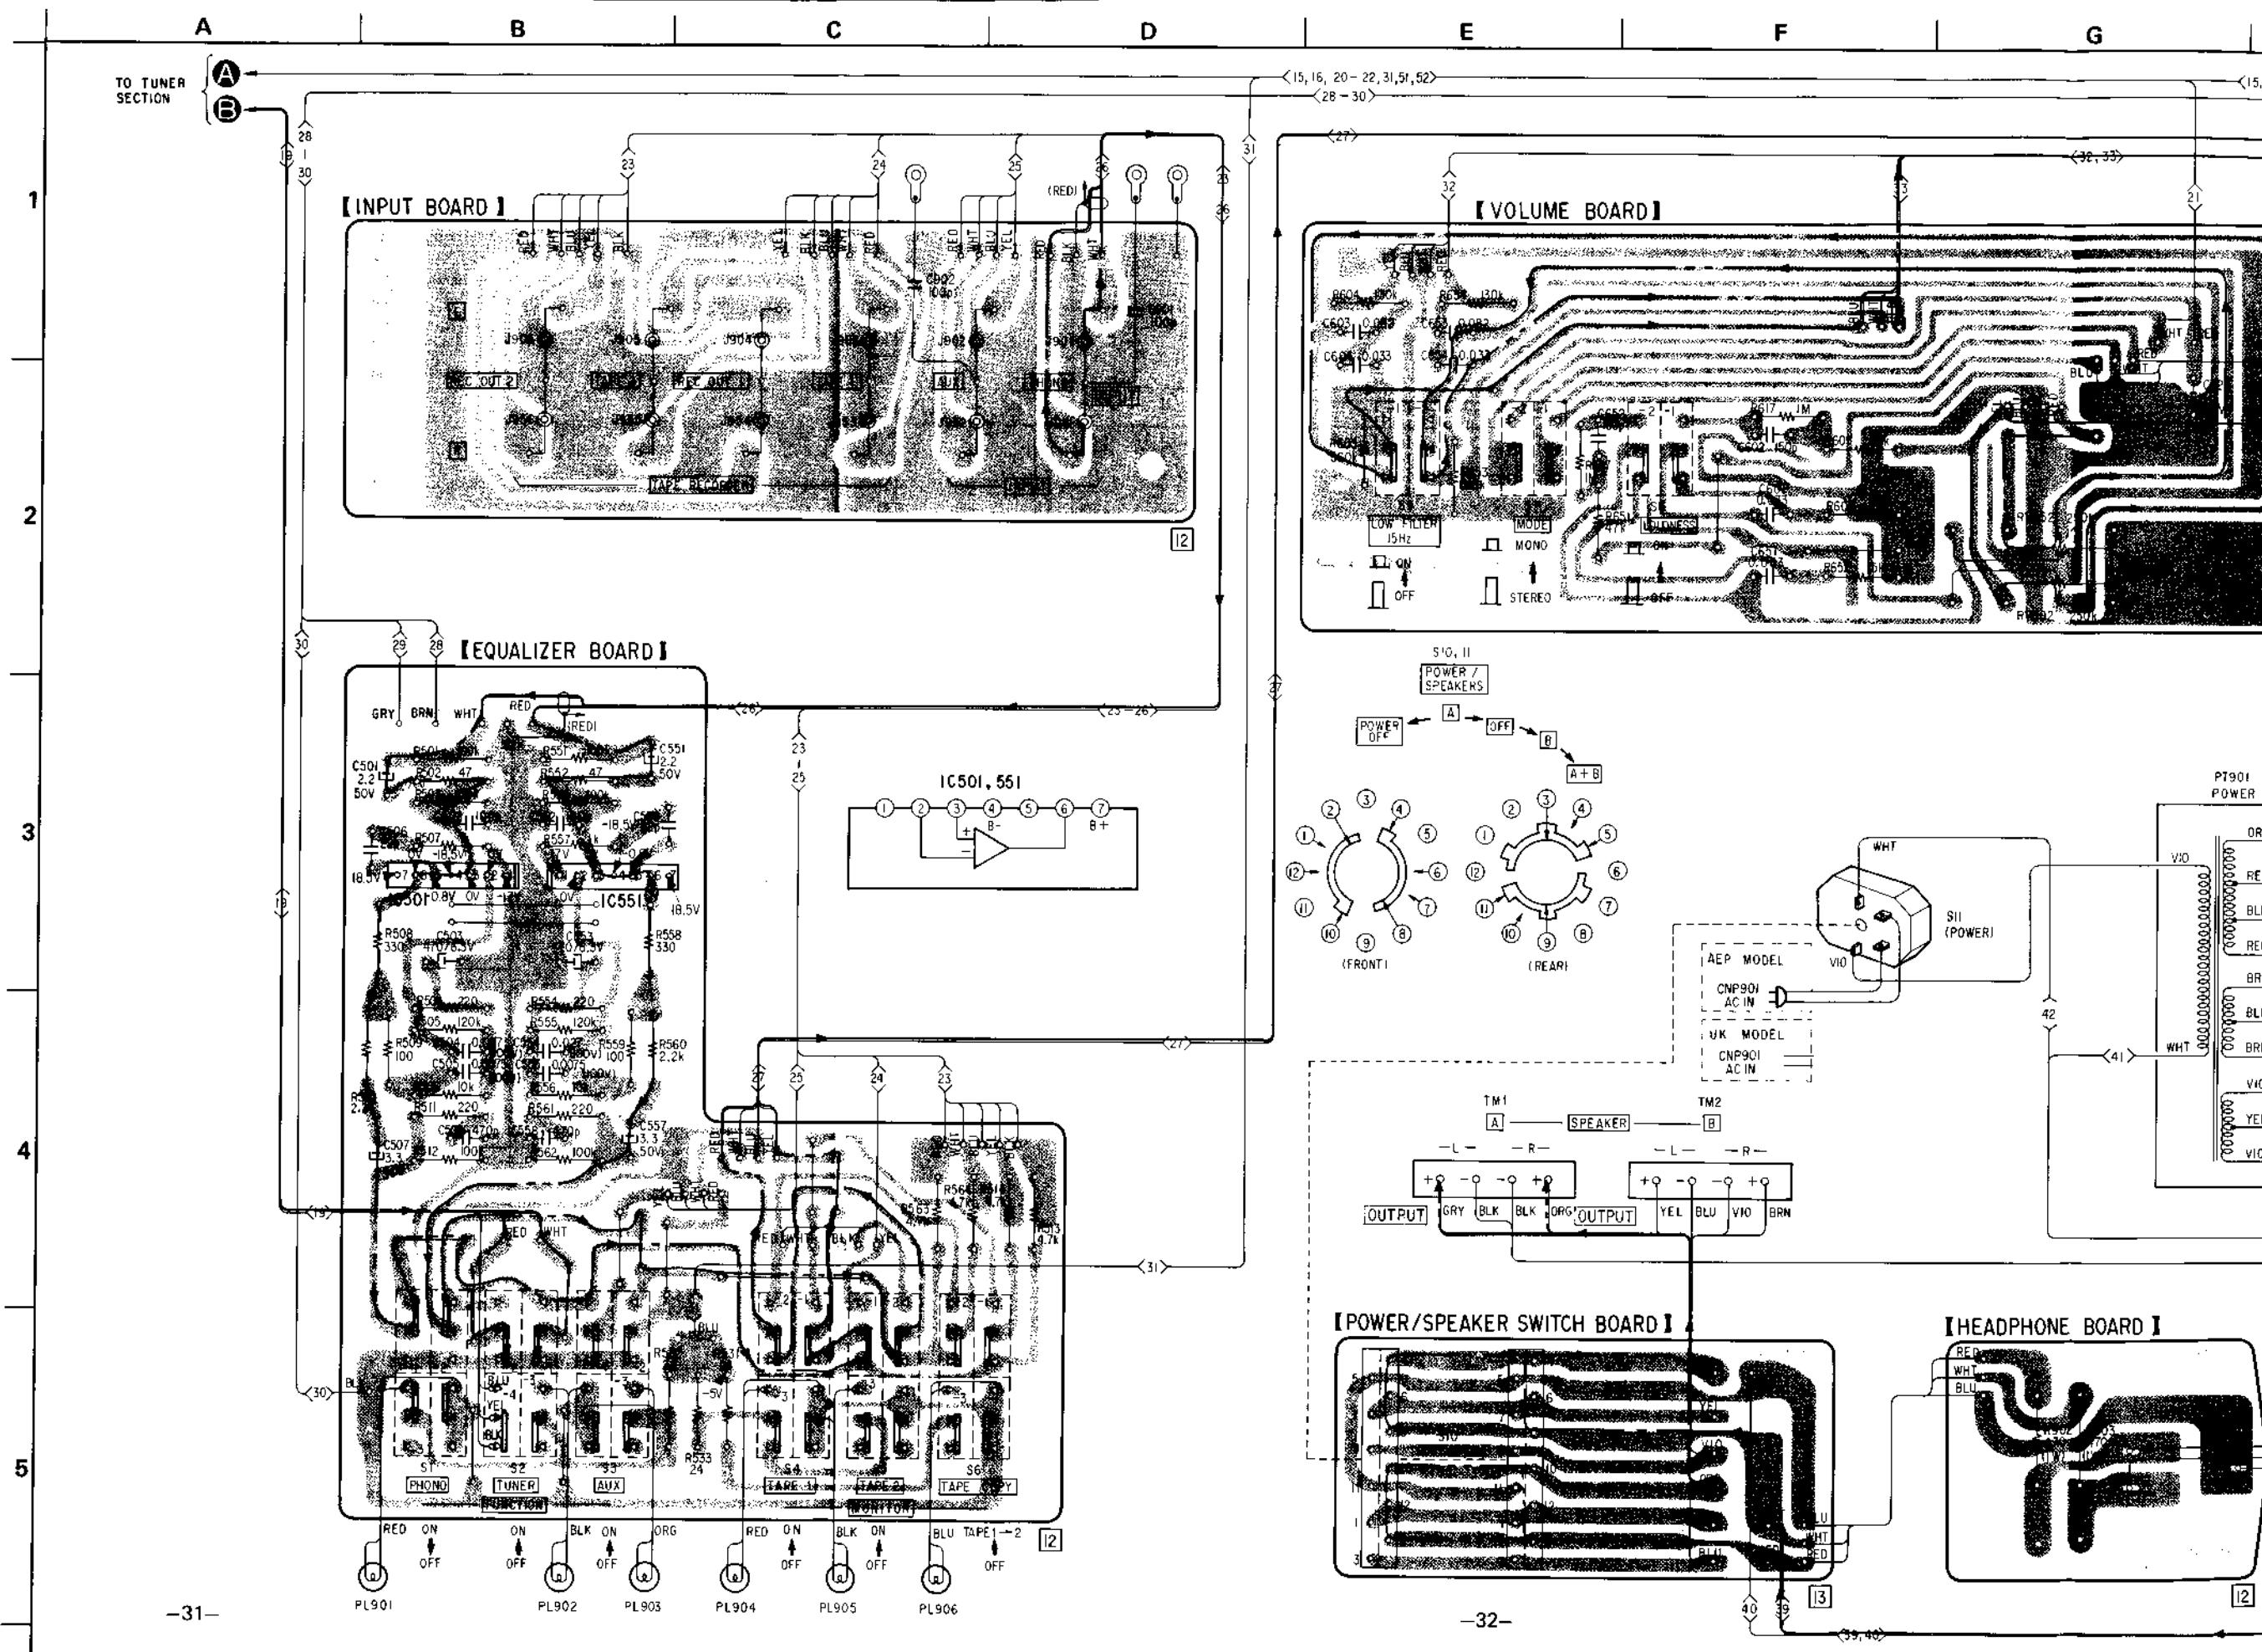


G H I J K L M

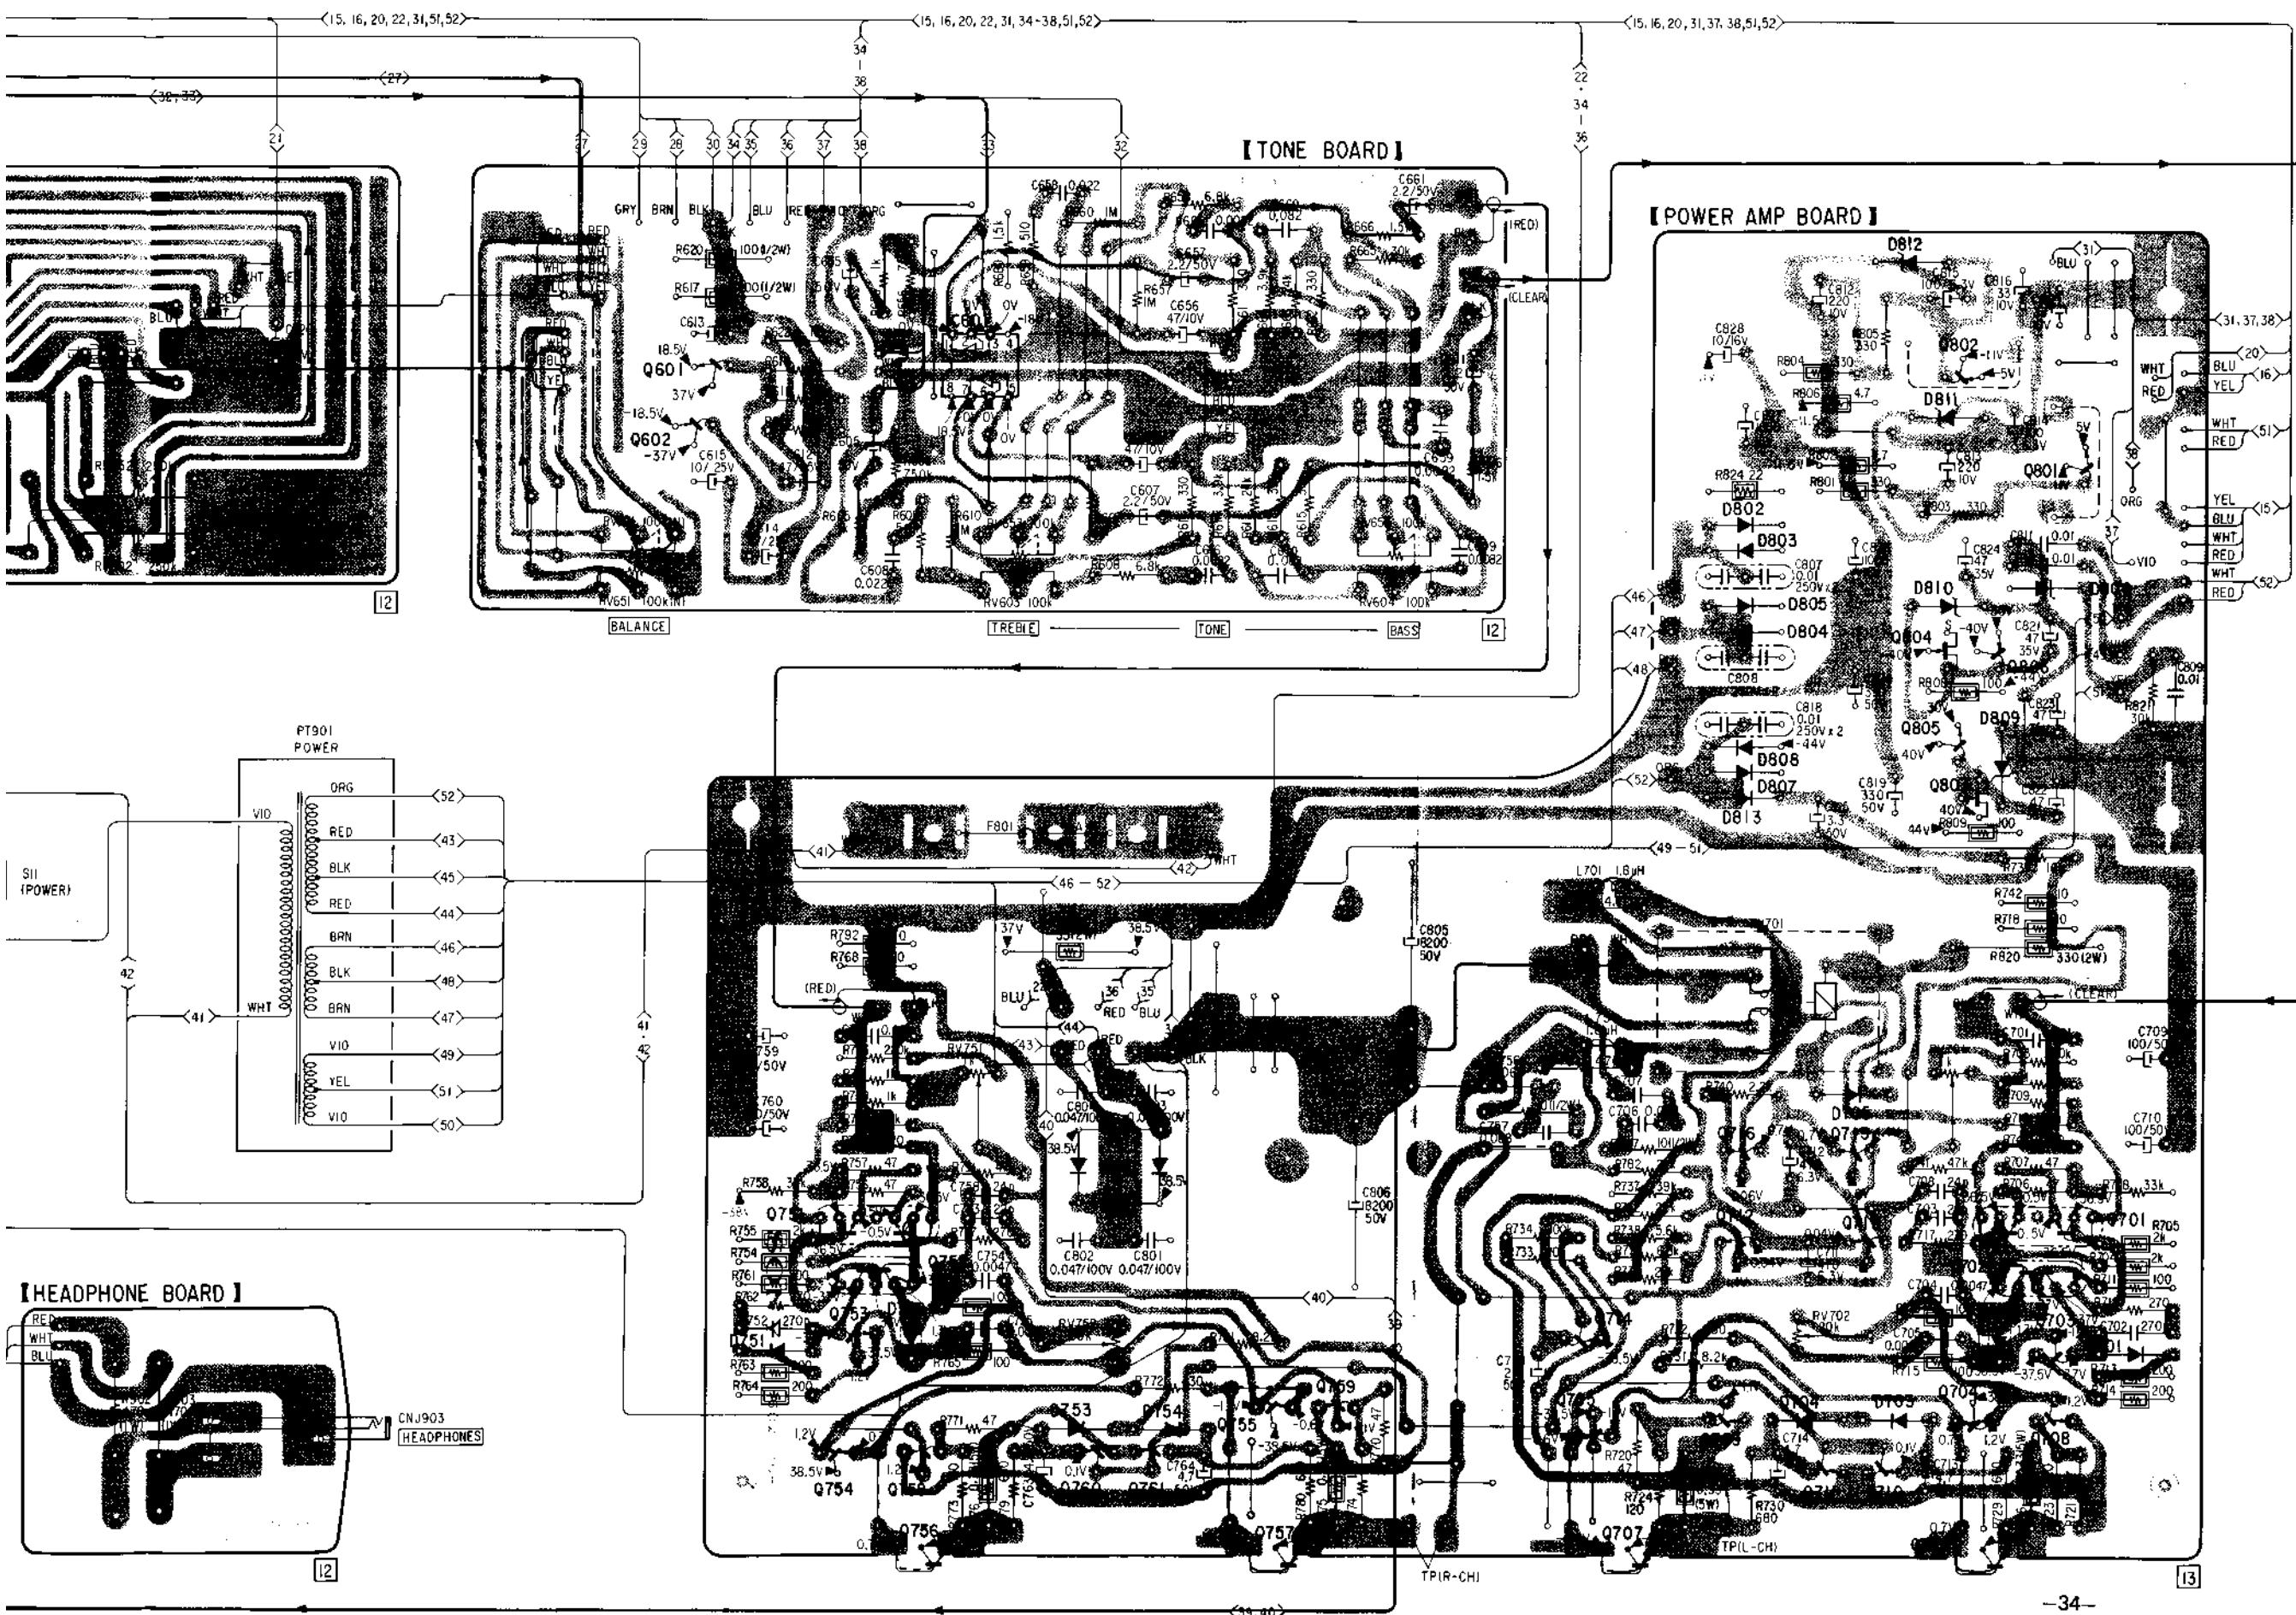


Q	IC	D
		812
601	802 IC601	
602	801	811
		802
		803
		810 806
		805
		804
	804, 806	
		805
		806
		809
	803	807
		813
		705
716, 715		801
751	701	
712, 713		
752	702	
753	714 703	752 702
755, 759		751 701
704, 706		
705, 709		704, 703
754, 758, 760		753, 754
761, 711, 710		
756, 757		
707, 706		

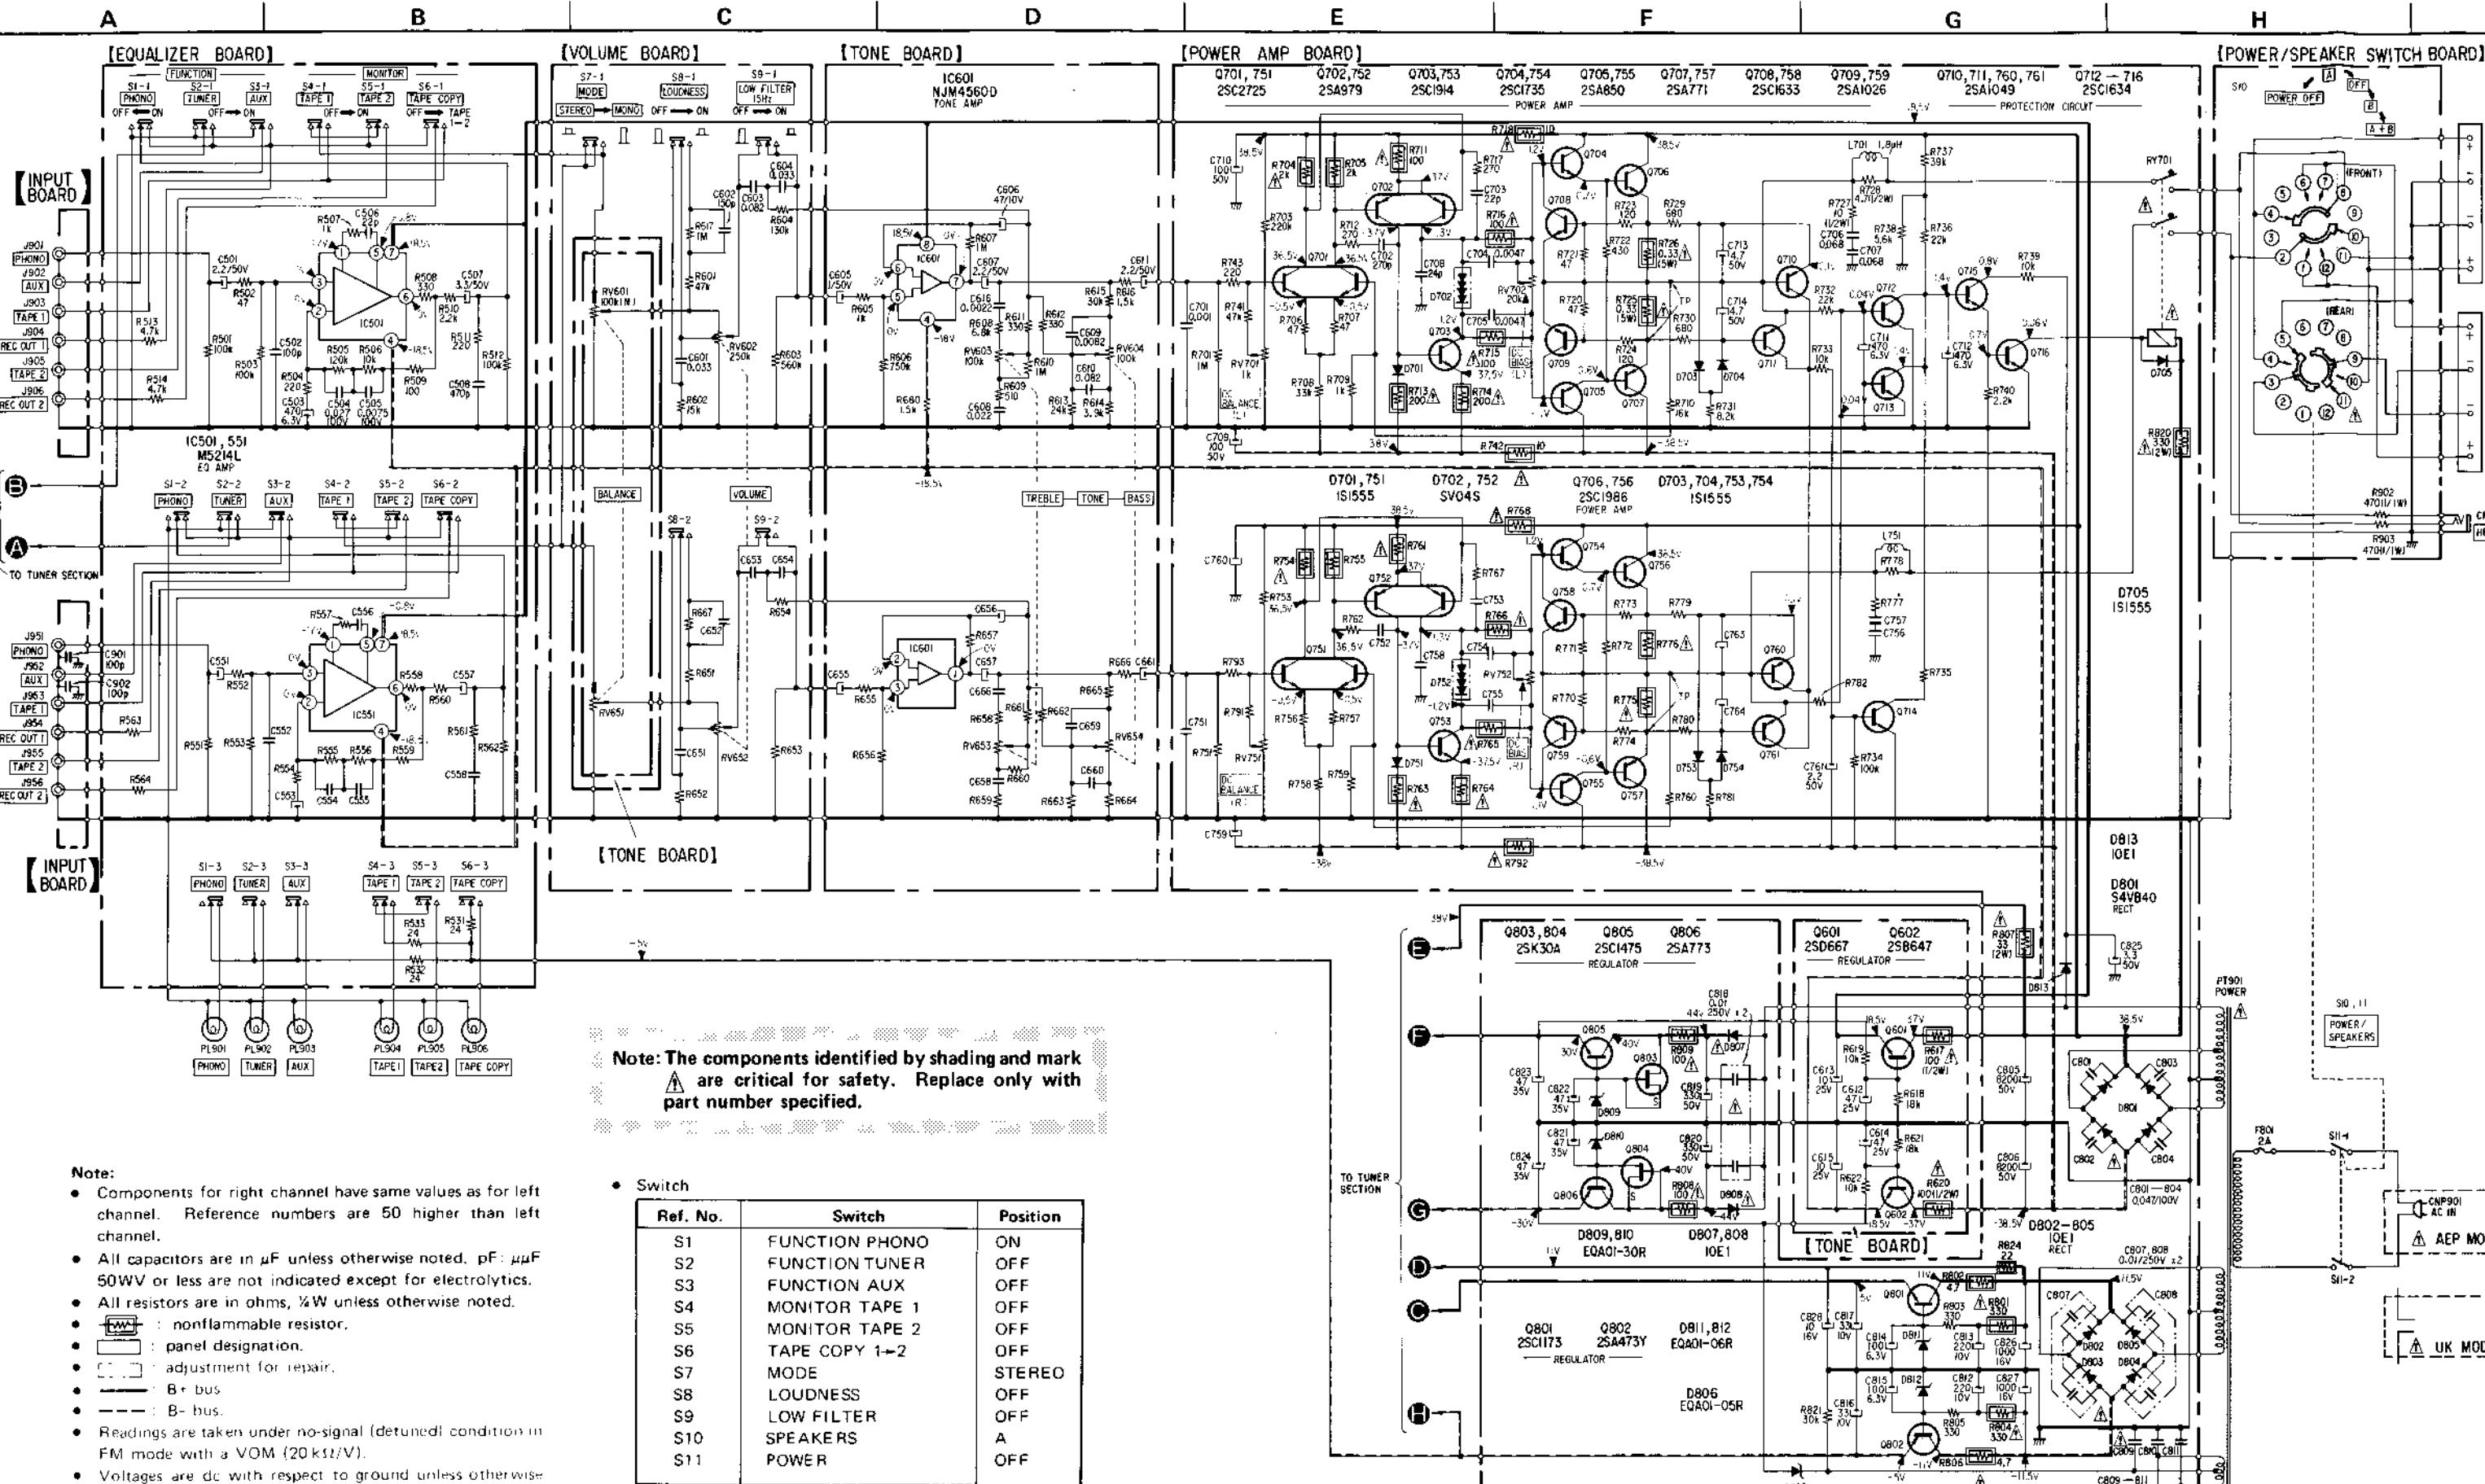

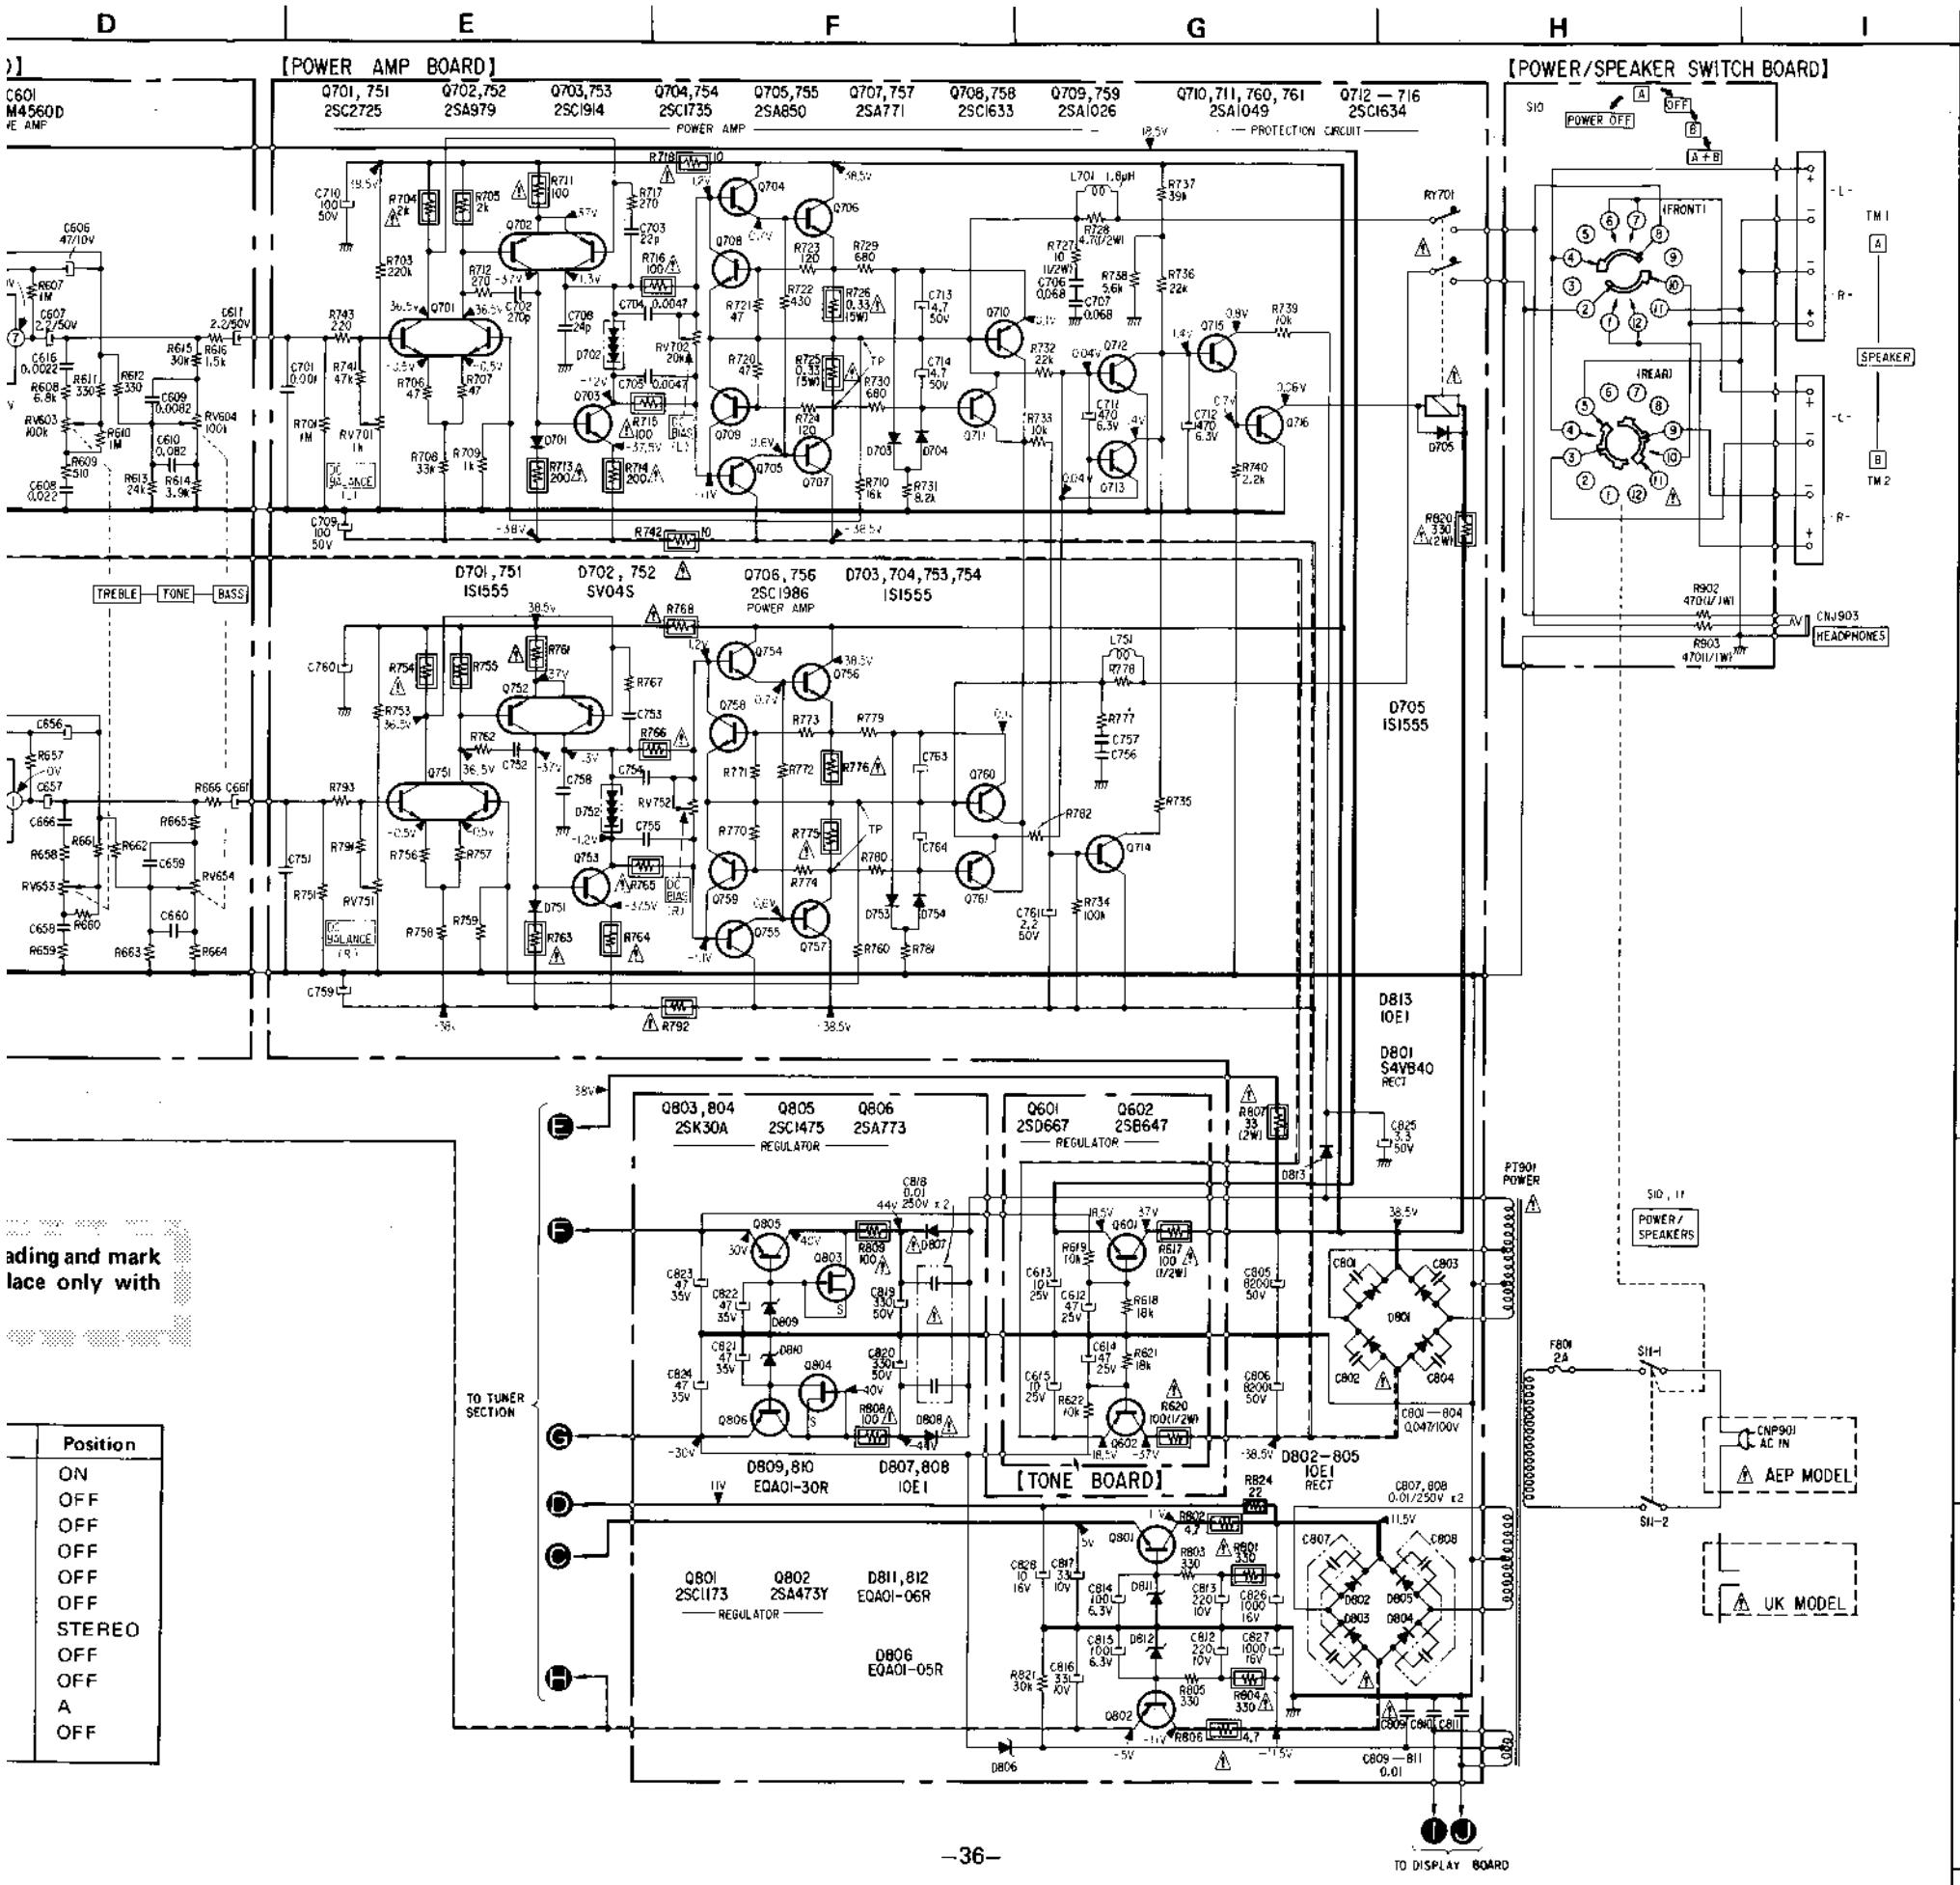

Semiconductor Lead Layouts:

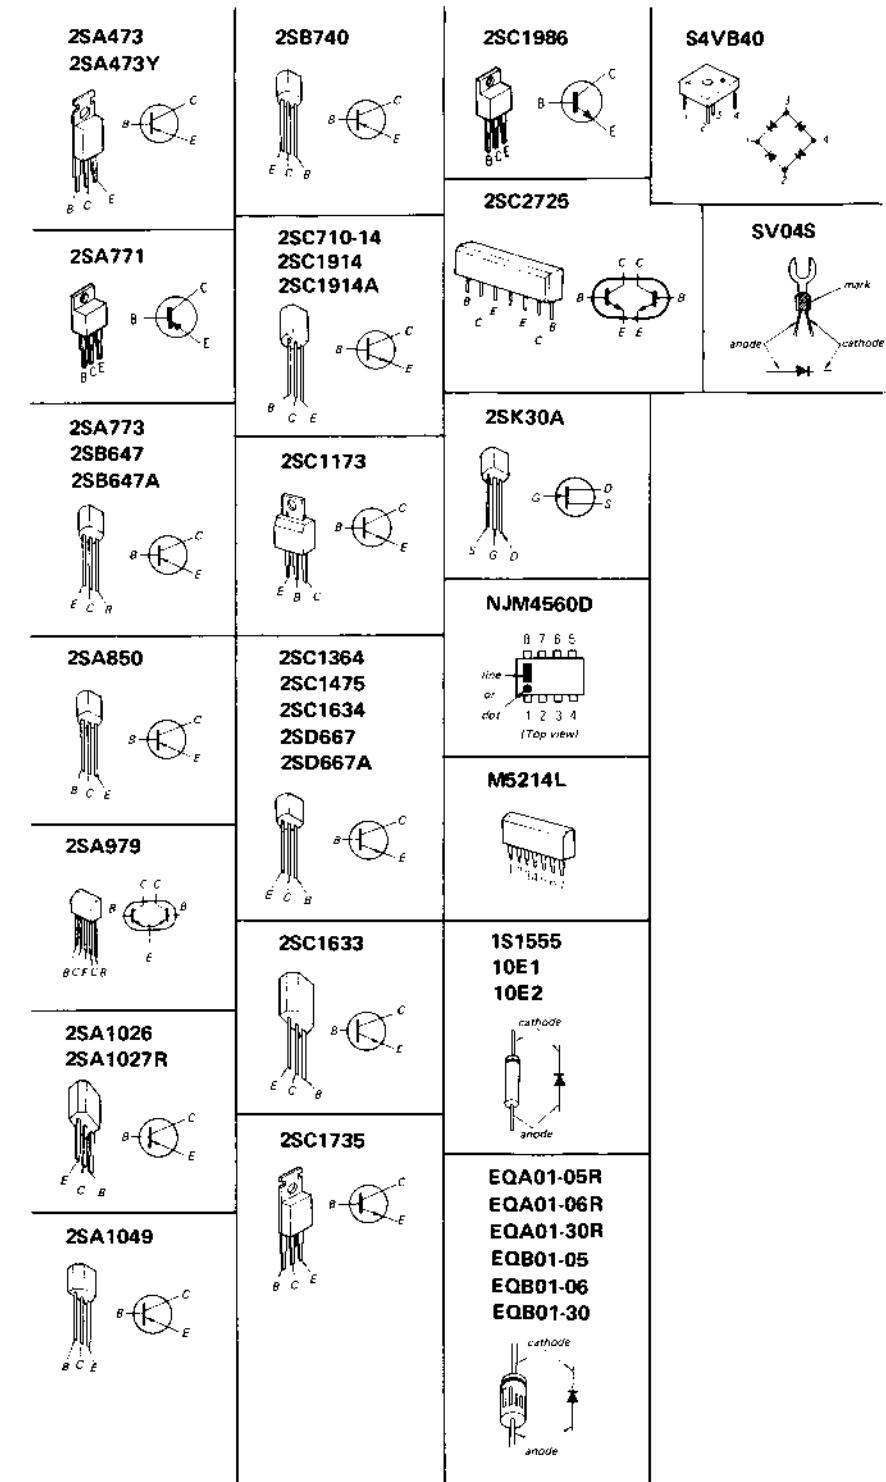

SECTION 5


EXPLODED VIEWS

5-1.

Note:

- Items marked "♦" are not stocked since they are seldom required for routine service. Some delay should be anticipated when ordering these items.
- All screws are Phillips (cross recess) type unless otherwise noted.
(-) = slotted head


Note: The components identified by shading and mark  are critical for safety. Replace only with part number specified.

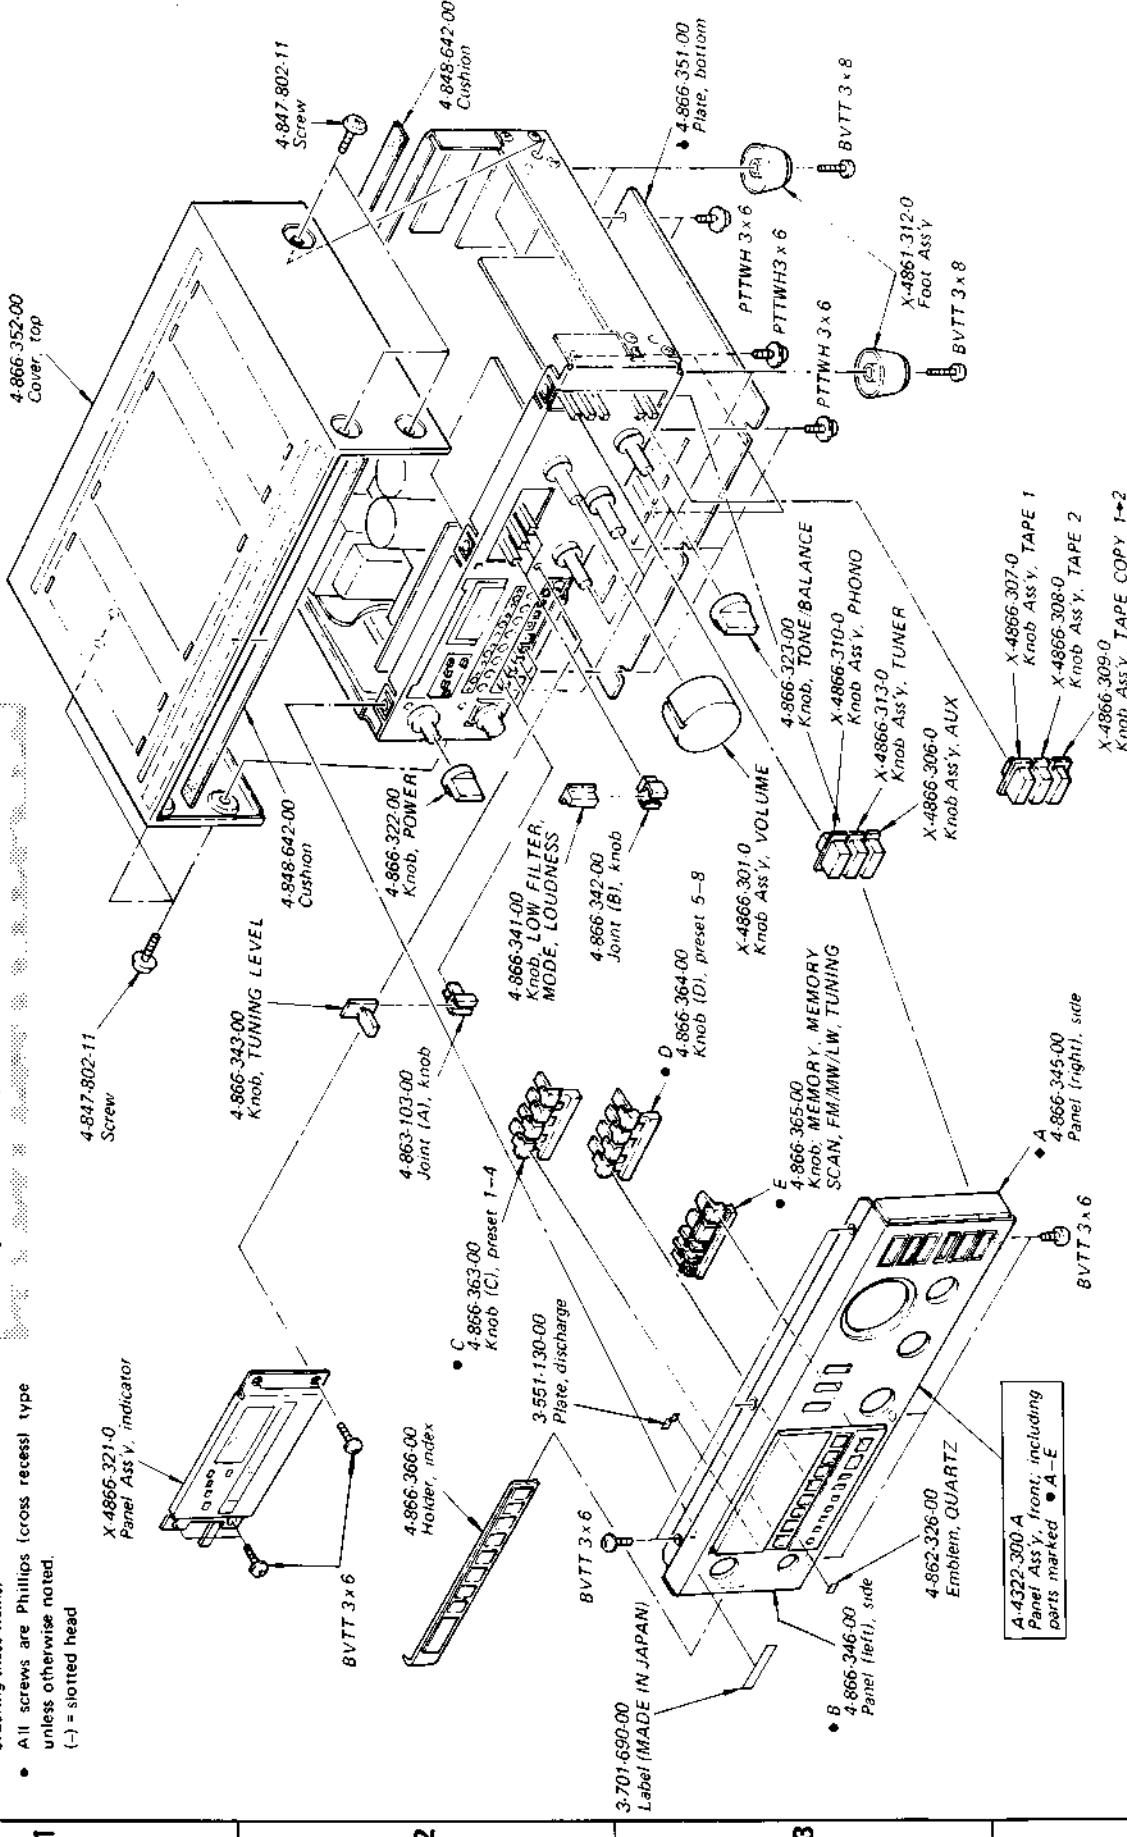

A-4322-300 A
Panel Ass'y. front; including
parts marked • A-E

X-4866-309-0
K0001 ASSY TAPE COPY 1-2

5-2.

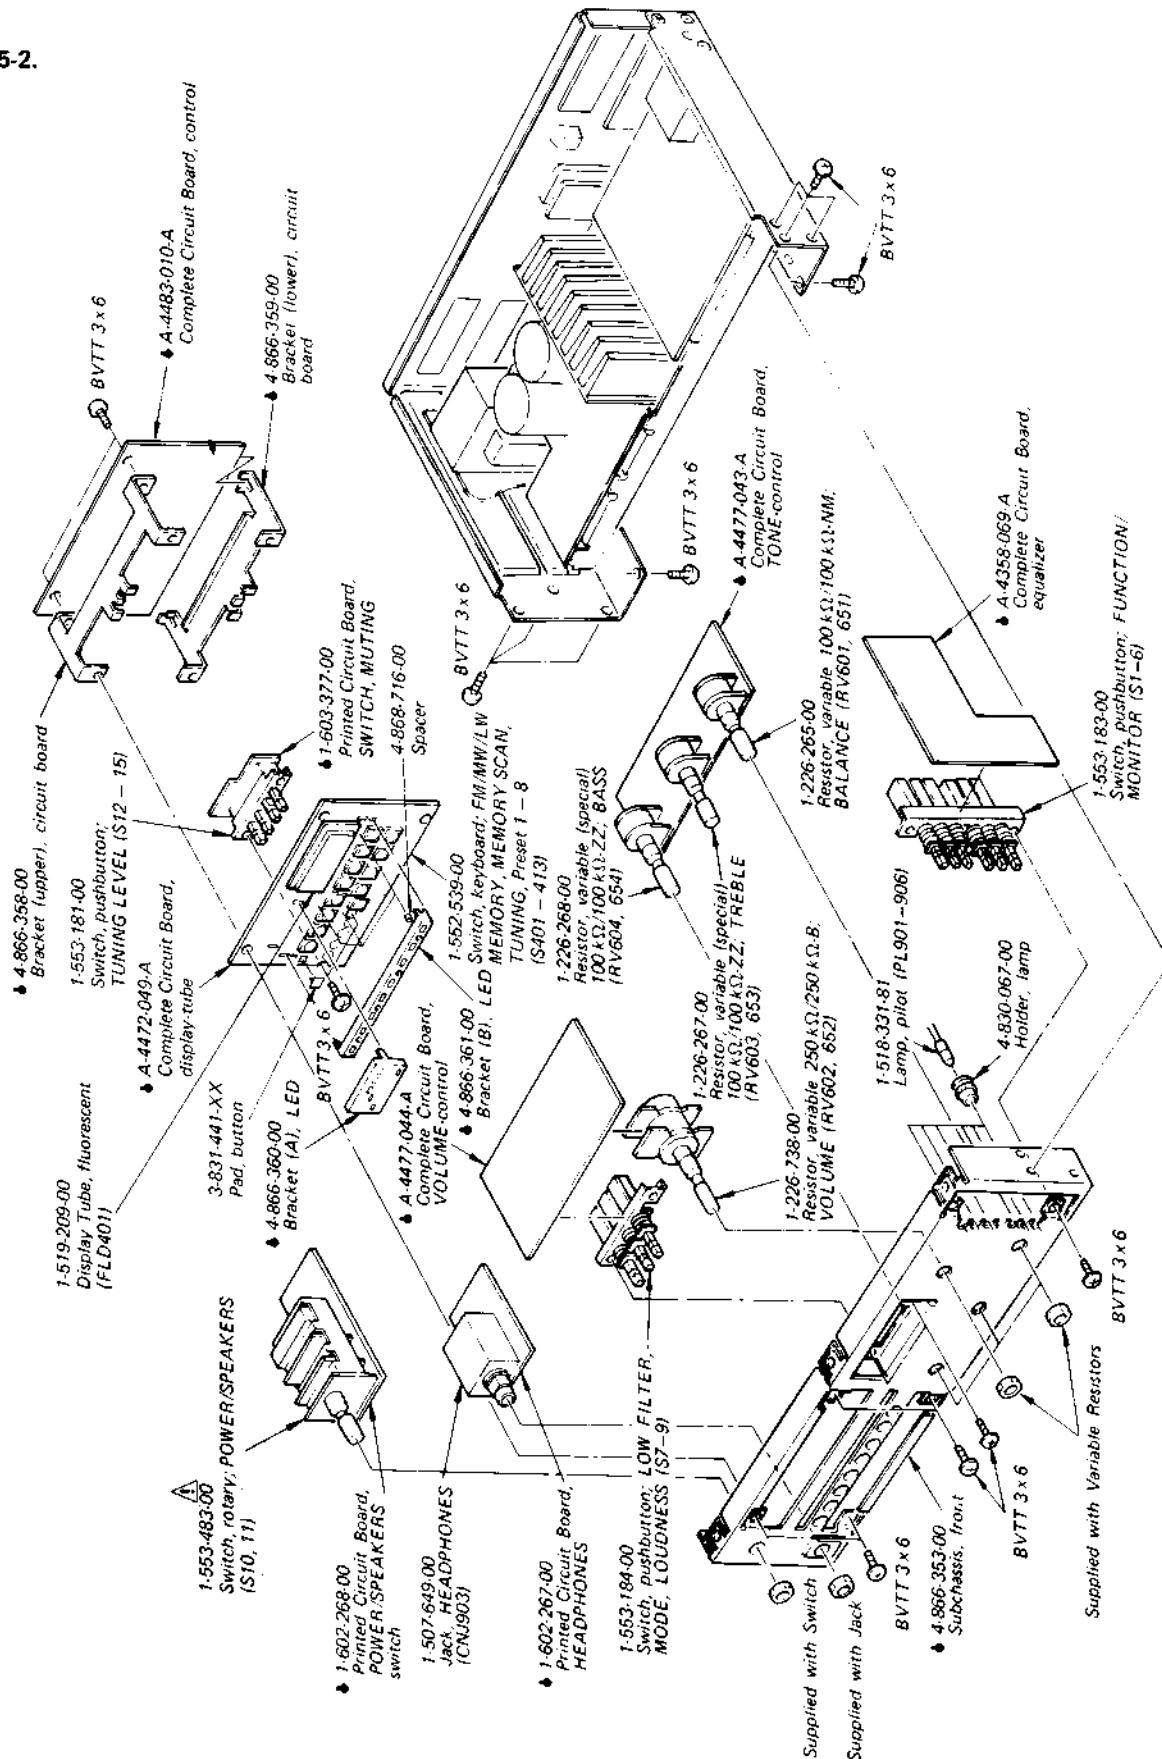

1

2

3

4

E


D

C

B

A

5.3

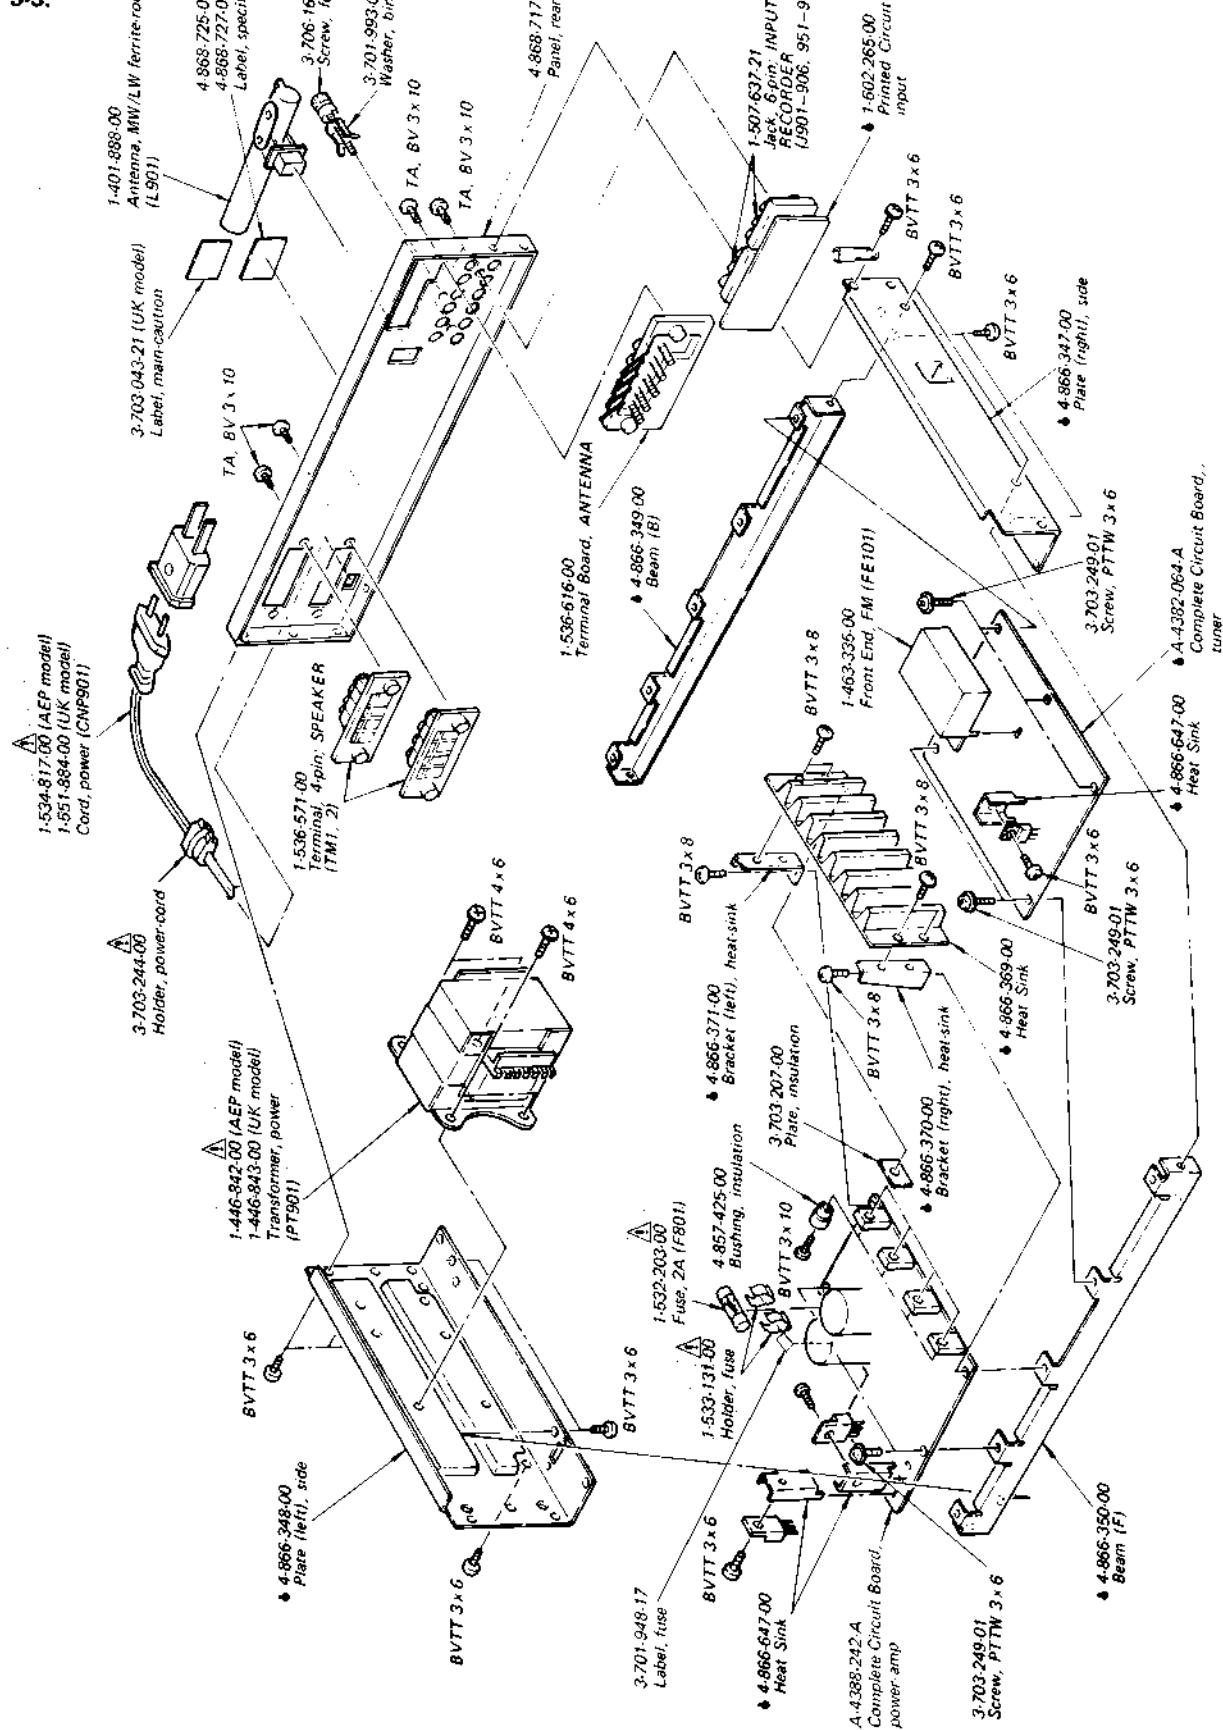

1

2

3

SECTION 6

ELECTRICAL PARTS LIST

<u>Ref. No.</u>	<u>Part No.</u>	<u>Description</u>	<u>Ref. No.</u>	<u>Part No.</u>	<u>Description</u>
SEMICONDUCTORS					
Transistors					
Q101-106	8-729-671-14	2SC710-14	IC101	8-759-812-31	LA1231
Q107	8-729-663-47	2SC1364	IC201	8-759-320-16	HA12016
Q301, 302	8-729-663-47	2SC1364	IC301	8-759-140-66	μ PD4066C
Q303	8-729-203-04	2SK30A	IC302	8-759-812-45	LA1245
Q304	8-729-398-62	2SC1986	IC303	8-759-984-69	MB84069B
Q305-310	8-729-663-47	2SC1364	IC304	8-759-140-11	μ PD4011C
Q311	8-729-201-52	2SA1015	IC401	8-759-153-65	μ PD553C065
Q312-319	8-729-634-47	2SC1364	IC402	8-759-607-78	CX778
Q320	8-729-201-52	2SA1015	IC403	8-759-140-11	μ PD4011C
Q321-324	8-729-634-47	2SC1364	IC404	8-759-100-67	UPA67C
Q401	8-729-203-05	2SK30A-GR3	IC405	8-757-611-00	CX761A
Q402	8-729-665-47	2SC1362	IC406	8-759-920-10	IR2E01
Q403	8-729-203-05	2SK30A-GR3	IC501, 551	8-759-652-14	M5214L
Q404	8-729-665-47	2SC1362	IC601	8-759-745-60	NJM4560D
Q405	8-729-663-47	2SC1364	Diodes		
Q406, 407	8-729-201-52	2SA1015	D101-103	8-719-815-55	1S1555
Q408-413	8-729-663-47	2SC1364	D301, 302	8-719-912-27	KV1226
Q414	8-729-665-47	2SC1362	D303, 304	8-712-600-00	1T26
Q601	8-729-906-72	2SD667A	D305	8-719-931-16	EQB01-16
Q602	8-729-300-72	2SB647A	D306-319	8-719-815-55	1S1555
Q701, 751	8-729-672-52	2SC2725	D402	8-719-912-00	MV-12N
Q702, 752	8-729-697-92	2SA979	D403-412	8-719-815-55	1S1555
Q703, 753	8-729-601-42	2SC1914A	D416-419	8-719-815-55	1S1555
Q704, 754	8-729-673-53	2SC1735	D420-424	8-719-922-41	SLP241B
Q705, 755	8-729-685-03	2SA850	D425	8-719-900-41	SLP141B
Q706, 756	8-729-398-62	2SC1986	D426-433	8-719-311-12	SEL1112R
Q707, 757	8-729-377-12	2SA771	D434	8-719-812-41	TLR124
Q708, 758	8-729-663-47	2SC1364	D701, 751		
Q709, 759	8-729-612-77	2SA1027R	D703, 753		
Q710, 760	8-729-204-91	2SA1049	D704, 754	8-719-815-55	1S1555
Q711, 761			D705		
Q801	8-729-217-33	2SC1173	D702, 752	8-719-300-11	SV04S
Q802	8-729-247-33	2SA473	D801	▲8-719-504-40	S4VB40
Q803, 804	8-729-203-04	2SK30A	D802-805	▲8-719-200-02	10E2
Q805	8-760-413-10	2SC1475	D806	8-719-931-05	EQB01-05
Q806	8-729-374-02	2SB740	D807, 808	▲8-719-200-02	10E2

- Items marked "●" are not stocked since they are seldom required for routine service. Some delay should be anticipated when ordering these items.

Note: The components identified by shading and mark ▲ are critical for safety. Replace only with part number specified.

<u>Ref. No.</u>	<u>Part No.</u>	<u>Description</u>
D809, 810	8-719-931-30	EQB01-30
D811, 812	8-719-931-06	EQB01-06

CAPACITORS

All capacitors are in μF . Common capacitors are omitted. Refer to the lists on pages 44 and 45 for their part numbers.

C801-804	△1-108-385-00	0.047	100V	mylar
C807, 808	△1-102-394-00	0.01	250V	ceramic
C818	△1-161-330-51	0.01	25V	film
C819, 820	△1-123-515-00	330	50V	electrolytic

CT301, 302	1-141-180-00	Trimmer
CT303, 304	1-141-171-00	Trimmer

RESISTORS

All resistors are in ohms. Common $\frac{1}{4}\text{W}$ carbon resistors are omitted. Refer to the list on page 46 for their part numbers.

R101	△1-247-107-00	100	$\frac{1}{4}\text{W}$	carbon (nonflammable)
R142, 143	△1-247-107-00	100	$\frac{1}{4}\text{W}$	carbon (nonflammable)
R201	△1-247-107-00	100	$\frac{1}{4}\text{W}$	carbon (nonflammable)
R314	△1-247-111-00	150	$\frac{1}{4}\text{W}$	carbon (nonflammable)
R322	△1-247-107-00	100	$\frac{1}{4}\text{W}$	carbon (nonflammable)
R328	△1-212-863-00	18	$\frac{1}{4}\text{W}$	fusible (nonflammable)
R617	△1-247-216-00	100	$\frac{1}{4}\text{W}$	carbon (nonflammable)
R620	△1-247-216-00	100	$\frac{1}{4}\text{W}$	carbon (nonflammable)
R704, 754	△1-247-138-00	2k	$\frac{1}{4}\text{W}$	carbon (nonflammable)
R705, 755	△1-247-138-00	2k	$\frac{1}{4}\text{W}$	carbon (nonflammable)

<u>Ref. No.</u>	<u>Part No.</u>	<u>Description</u>
R711, 761		
R715, 765	△1-247-107-00	100 $\frac{1}{4}\text{W}$ carbon (nonflammable)
R716, 766		
R713, 763	△1-247-114-00	200 $\frac{1}{4}\text{W}$ carbon (nonflammable)
R714, 764		
R718, 768	△1-247-083-00	10 $\frac{1}{4}\text{W}$ carbon (nonflammable)
R725, 775	△1-217-157-00	0.33 5W metal oxide
R726, 776		
R727, 777	1-244-825-00	10 $\frac{1}{2}\text{W}$ carbon
R728, 778	1-244-817-00	4.7 $\frac{1}{2}\text{W}$ carbon
R742, 792	△1-247-083-00	10 $\frac{1}{4}\text{W}$ carbon (nonflammable)
R801	△1-247-119-00	330 $\frac{1}{4}\text{W}$ carbon (nonflammable)
R802	△1-247-079-00	4.7 $\frac{1}{4}\text{W}$ carbon (nonflammable)
R804	△1-247-119-00	330 $\frac{1}{4}\text{W}$ carbon
R806	△1-247-079-00	4.7 $\frac{1}{4}\text{W}$ carbon (nonflammable)
R807	△1-206-475-00	33 2W metal oxide (nonflammable)
R808, 809	△1-247-107-00	100 $\frac{1}{4}\text{W}$ carbon (nonflammable)
R820	△1-206-652-00	330 2W metal oxide (nonflammable)
R824	△1-247-091-00	22 $\frac{1}{4}\text{W}$ carbon (nonflammable)
R902, 903	1-213-139-00	470 1W metal oxide (nonflammable)
RT101-103	1-226-238-00	50k-B, adjustable; signal meter, FM tuning level, FM muting level, stereo separation, A-M muting level
RT201, 301		
RT202	1-226-235-00	5k-B, adjustable; VCO
RT401, 402	1-226-427-00	500-B, adjustable; PLL
RV601, 651	1-226-265-00	100k/100k, variable; BALANCE
RV602, 652	1-226-738-00	250k/250k-B, variable; VOLUME
RV603, 653	1-226-267-00	100k/100k, variable; TREBLE
RV604, 654	1-226-268-00	100k/100k, variable; BASS

<u>Ref. No.</u>	<u>Part No.</u>	<u>Description</u>	<u>Ref. No.</u>	<u>Part No.</u>	<u>Description</u>
RV701,751	1-226-233-00	1k-B, adjustable; dc balance	X401	1-527-731-00	Crystal, quartz
RV702,752	1-226-237-00	20k-B, adjustable; dc bias		▲1-533-131-00	Holder, fuse
MISCELLANEOUS					
CF101-104	1-527-344-91	Filter, ceramic	● A-4358-069-A	Equalizer	
CF301	1-527-403-00	Filter, mechanical	● A-4382-064-A	Tuner	
CF302	1-527-732-00	Filter, ceramic	● A-4388-242-A	Power Amp	
CNJ903	1-507-649-00	Jack, HEADPHONES	● A-4472-049-A	Display	
CNP901	▲1-534-817-31 ▲1-551-884-00	Cord, power (AEP model) Cord, power (UK model)	● A-4477-043-A	Tone-Control	
F801	▲1-532-203-00	Fuse, 2A	● A-4477-044-A	VOLUME-Control	
FE101	1-463-335-00	Front End	● A-4483-010-A	Control	
FLD401	1-519-209-00	Tube, fluorescent-display	PRINTED CIRCUIT BOARDS		
IFT101	1-404-258-00	Transformer, discriminator	● 1-602-265-00	Input	
IFT301	1-409-323-00	Coil, mechanical-filter (PRI)	● 1-602-267-00	Headphone	
IFT302	1-409-324-00	Coil, mechanical-filter (SEC)	● 1-602-268-00	POWER/SPEAKERS Switch	
IFT303	1-404-266-00	Transformer, a-m IF	● 1-603-377-00	Switch, Muting	
J901-906	1-507-637-21	Jack, phono; 6-unit	ACCESSORIES AND PACKING MATERIALS		
J951-956)		Part No.	Description	
L301	1-407-169-XX	100μH, microinductor	1-501-161-00	Antenna, FM-feeder	
L302	1-407-173-XX	220μH, microinductor	3-701-630-00	Bag, plastic	
L303	1-405-927-00	Coil, MW OSC	3-783-168-11	Manual, instruction	
L304	1-405-914-00	Coil, LW OSC	3-795-036-11	Manual, instruction (Dutch and Swedish)	
L305	1-407-176-XX	390μH, microinductor	4-809-251-00	Bag, plastic	
● L701, 751	1-420-838-00	Coil, air-wound	4-866-398-00	Cushion, top (front)	
L901	1-401-888-00	Antenna, LW/MW ferrite-rod	4-866-399-00	Cushion, bottom (left)	
LPF101	1-231-729-00	Filter, lowpass	4-868-730-00	Carton	
LPF201	1-231-574-00	Filter, lowpass	4-868-713-00	Cushion, top (back)	
PL901-906	1-518-331-81	Lamp, pilot; 6V 35mA	4-868-714-00	Cushion, bottom (right)	
RY701	▲1-553-227-00	Relay			
S7-9	1-553-184-00	Switch, pushbutton; LOW FILTER, MODE, LOUDNESS			
S10, 11	▲1-553-483-00	Switch, rotary; POWER/SPEAKERS			
S12-15	1-553-181-00	Switch, pushbutton; TUNING LEVEL			
S401-413	1-552-539-00	Switch, keyboard; FM/MW/LW, MEMORY, MEMORY SCAN, TUNING, preset 1-8			
TP901	▲1-446-842-00 ▲1-446-843-00	Transformer, power (AEP model) Transformer, power (UK model)			

SONY-STANDARD CAPACITORS AND RESISTORS

ELECTROLYTIC CAPACITORS

CAP. (μF)	RATING						→ : Use the high voltage rated one.
	6.3 VOLT.	10 VOLT.	16 VOLT.	25 VOLT.	35 VOLT.	50 VOLT.	
PART No.	PART No.	PART No.	PART No.	PART No.	PART No.	PART No.	PART No.
0.47							I-121-726-00
1.0							I-121-391-00
2.2							I-121-450-00
3.3	→	→	→	I-121-392-00			I-121-393-00
4.7	→	→	→	I-121-395-00			I-121-396-00
10	→	→	I-121-651-00	I-121-398-00			I-121-738-00
22	→	→	I-121-479-00	I-121-480-00	I-121-662-00		I-121-152-00
33	→	→	I-121-403-00	I-121-404-00	I-121-652-00		I-121-405-00
47	→	I-121-352-00	I-121-409-00	I-121-410-00	I-121-653-00		I-121-411-00
100	→	I-121-414-00	I-121-415-00	I-121-416-00	I-121-357-00		I-121-417-00
220	I-121-411-00	I-121-420-00	I-121-421-00	I-121-422-00	I-121-261-00		I-121-423-00
330	I-121-751-00	I-121-805-00	I-121-521-00	I-121-654-00	I-121-655-00		I-121-656-00
470	I-121-424-00	I-121-425-00	I-121-426-00	I-121-733-00	I-121-361-00		I-121-810-00
1000	—	I-121-736-00	I-121-245-00	I-121-657-00	I-121-388-00		I-123-061-00
2200	I-121-658-00	I-121-659-00	I-121-660-00	I-123-067-00	I-121-984-00		—
3300	I-121-661-00	I-123-075-00	I-123-071-00	—	—		—

CAP. (μF)	100 VOLT.	160 VOLT.	250 VOLT.	350 VOLT.
	PART No.	PART No.	PART No.	PART No.
0.47	—	—	—	—
1.0	I-123-249-00	I-123-252-00	I-123-003-00	I-121-168-00
2.2	I-123-250-00	I-123-026-00	—	I-123-028-00
3.3	I-121-995-00	—	I-123-004-00	I-123-006-00
4.7	I-123-255-00	I-121-246-00	I-121-759-00	I-123-007-00
10	I-121-126-00	I-121-999-00	I-123-254-00	I-123-008-00
22	I-121-996-00	I-123-253-00	I-123-005-00	I-123-022-00
33	I-121-997-00	I-121-757-00	—	—
47	I-123-251-00	I-121-919-00	—	—
100	I-123-084-00	—	—	—

CERAMIC CAPACITORS

CAP. (pF)	RATING						
	50 VOLT.	CAP. (pF)	50 VOLT.	CAP. (pF)	50 VOLT.	CAP. (μF)	50 VOLT.
PART No.	PART No.		PART No.		PART No.		PART No.
0.5	I-101-837-00	22	I-102-959-00	150	I-101-361-00	0.001	I-102-074-00
0.75	I-101-586-00	24	I-102-960-00	160	I-101-367-00	0.0012	I-102-118-00
1.0	I-102-934-00	27	I-102-961-00	180	I-102-976-00	0.0015	I-102-119-00
1.5	I-101-576-00	30	I-102-962-00	200	I-102-977-00	0.0018	I-102-120-00
2.0	I-102-935-00	33	I-102-963-00	220	I-102-978-00	0.0022	I-102-121-00
3	I-102-936-00	36	I-102-964-00	240	I-102-979-00	0.0027	I-102-122-00
4	I-102-937-00	39	I-102-965-00	270	I-102-980-00	0.0033	I-102-123-00
5	I-102-942-00	43	I-102-966-00	300	I-102-981-00	0.0039	I-102-124-00
6	I-102-943-00	47	I-101-880-00	330	I-102-820-00	0.0047	I-102-125-00
7	I-102-944-00	51	I-101-882-00	360	I-102-821-00	0.0056	I-102-126-00
8	I-102-945-00	56	I-101-884-00	390	I-102-822-00	0.0068	I-102-127-00
9	I-102-946-00	62	I-101-886-00	430	I-102-823-00	0.0082	I-102-128-00
10	I-102-947-00	68	I-101-888-00	470	I-102-824-00	0.01	I-102-129-00
11	I-102-948-00	75	I-101-890-00	510	I-101-059-00	0.022	I-101-005-00
12	I-102-949-00	82	I-102-971-00	560	I-102-115-00	0.047	I-101-006-00
13	I-102-950-00	91	I-102-972-00	680	I-102-116-00		
15	I-102-951-00	100	I-102-973-00	820	I-102-117-00		
16	I-102-952-00	110	I-102-815-00				
18	I-102-953-00	120	I-102-816-00				
20	I-102-958-00	130	I-101-081-00				

0.001 μF = 1,000pF

CERAMIC (SEMICONDUCTOR) CAPACITORS


CAP. (μF)	RATING					→ : Use the high voltage rated one.
	25 VOLT.	50 VOLT.	CAP. (pF)	25 VOLT.	50 VOLT.	
PART No.	PART No.	PART No.	PART No.	PART No.	PART No.	PART No.
0.001	→	I-161-039-00	0.018	I-161-016-00	I-161-054-00	
0.0012	→	I-161-040-00	0.022	I-161-017-00	I-161-055-00	
0.0015		I-161-041-00	0.027	I-161-018-00	I-161-056-00	
0.0018		I-161-042-00	0.033	I-161-019-00	I-161-057-00	
0.0022		I-161-043-00	0.039	I-161-010-00	I-161-058-00	
0.0027	→	I-161-044-00	0.047	I-161-021-00	I-161-059-00	
0.0033	→	I-161-045-00	0.056	→	I-161-060-00	
0.0039	→	I-161-046-00	0.068	→	I-161-061-00	
0.0047	→	I-161-047-00	0.082	I-161-024-00	I-161-062-00	
0.0056	→	I-161-048-00	0.1	I-161-025-00	I-161-063-00	
0.0068	→	I-161-049-00				
0.0082	I-161-012-00	I-161-050-00				
0.01	I-161-013-00	I-161-051-00				
0.012	→	I-161-052-00				
0.015	I-161-015-00	I-161-053-00				

MYLAR CAPACITORS

RATING											
CAP. (μ F)	50 VOLT.	100 VOLT.	200 VOLT.	CAP. (μ F)	50 VOLT.	100 VOLT.	200 VOLT.	CAP. (μ F)	50 VOLT.	100 VOLT.	200 VOLT.
PART No.	PART No.	PART No.	PART No.	PART No.	PART No.	PART No.	PART No.	PART No.	PART No.	PART No.	PART No.
0.001	I-108-227-00	I-108-365-00	I-108-405-00	0.01	I-108-239-00	I-108-377-00	I-108-421-00	0.1	I-108-251-00	I-108-389-00	I-108-433-00
0.0012	I-108-351-00	I-108-366-00	I-108-410-00	0.012	I-108-357-00	I-108-378-00	I-108-422-00	0.12	I-108-363-00	I-108-390-00	I-108-434-00
0.0015	I-108-228-00	I-108-367-00	I-108-411-00	0.015	I-108-240-00	I-108-379-00	I-108-423-00	0.15	I-108-252-00	I-108-391-00	I-108-435-00
0.0018	I-108-352-00	I-108-368-00	I-108-412-00	0.018	I-108-358-00	I-108-380-00	I-108-424-00	0.18	I-108-364-00	I-108-392-00	I-108-436-00
0.0022	I-108-230-00	I-108-369-00	I-108-413-00	0.022	I-108-242-00	I-108-381-00	I-108-425-00	0.22	I-108-254-00	I-108-393-00	I-108-437-00
0.0027	I-108-353-00	I-108-370-00	I-108-414-00	0.027	I-108-359-00	I-108-382-00	I-108-426-00	0.27	I-108-854-00	-	-
0.0033	I-108-232-00	I-108-371-00	I-108-415-00	0.033	I-108-244-00	I-108-383-00	I-108-427-00	0.33	I-108-855-00	-	-
0.0039	I-108-354-00	I-108-372-00	I-108-416-00	0.039	I-108-360-00	I-108-384-00	I-108-428-00	0.39	I-108-856-00	-	-
0.0047	I-108-234-00	I-108-373-00	I-108-417-00	0.047	I-108-246-00	I-108-385-00	I-108-429-00	0.47	I-108-857-00	-	-
0.0056	I-108-355-00	I-108-374-00	I-108-418-00	0.056	I-108-361-00	I-108-386-00	I-108-430-00	-	-	-	-
0.0068	I-108-237-00	I-108-375-00	I-108-419-00	0.068	I-108-249-00	I-108-387-00	I-108-431-00	-	-	-	-
0.0082	I-108-356-00	I-108-376-00	I-108-420-00	0.082	I-108-362-00	I-108-388-00	I-108-432-00	-	-	-	-

**TANTALUM CAPACITORS**

CAP. (μ F)	RATING						→ : Use the high voltage rated one.
	3.15 VOLT.	6.3 VOLT.	10 VOLT.	16 VOLT.	20 VOLT.	25 VOLT.	
PART No.	PART No.	PART No.	PART No.	PART No.	PART No.	PART No.	PART No.
0.01	-	-	-	-	-	-	I-131-396-00
0.015	-	-	-	-	-	-	I-131-397-00
0.022	-	-	-	-	-	-	I-131-398-00
0.033	-	-	-	-	-	-	I-131-399-00
0.047	-	-	-	-	-	-	I-131-400-00
0.068	-	-	-	-	-	-	I-131-401-00
0.1	-	-	-	-	-	-	I-131-402-00
0.15	-	-	-	-	-	-	I-131-403-00
0.22	-	-	-	-	-	-	I-131-404-00
0.33	-	-	-	-	-	-	I-131-405-00
0.47	-	-	-	-	I-131-412-00	-	I-131-406-00
0.68	-	-	-	I-131-415-00	-	I-131-410-00	I-131-407-00
1.0	-	-	I-131-418-00	-	I-131-413-00	-	I-131-408-00
1.5	-	I-131-421-00	-	I-131-416-00	-	I-131-411-00	I-131-348-00
2.2	I-131-424-00	-	I-131-419-00	-	I-131-414-00	-	I-131-355-00
3.3	-	I-131-422-00	-	I-131-417-00	I-131-362-00	I-131-356-00	I-131-350-00
4.7	I-131-425-00	-	I-131-420-00	I-131-369-00	I-131-363-00	I-131-357-00	I-131-351-00
6.8	-	I-131-423-00	I-131-376-00	I-131-370-00	I-131-364-00	I-131-358-00	I-131-352-00
10	I-131-426-00	I-131-383-00	I-131-377-00	I-131-371-00	I-131-365-00	I-131-359-00	I-131-353-00
15	I-131-390-00	I-131-384-00	I-131-378-00	I-131-372-00	I-131-366-00	I-131-360-00	-
22	I-131-391-00	I-131-385-00	I-131-379-00	I-131-373-00	I-131-367-00	-	-
33	I-131-392-00	I-131-386-00	I-131-380-00	I-131-374-00	-	-	-
47	I-131-393-00	I-131-387-00	I-131-381-00	-	-	-	-
68	I-131-394-00	I-131-388-00	-	-	-	-	-
100	I-131-395-00	-	-	-	-	-	-

**TANTALUM CAPACITORS**

CAP. (μ F)	RATING						PART No.
	3 VOLT.	6.3 VOLT.	10 VOLT.	16 VOLT.	20 VOLT.	35 VOLT.	
PART No.	PART No.	PART No.	PART No.	PART No.	PART No.	PART No.	PART No.
0.033	-	-	-	-	-	-	I-131-273-00
0.047	-	-	-	-	-	-	I-131-274-00
0.068	-	-	-	-	-	-	I-131-275-00
0.1	-	-	-	-	-	-	I-131-276-00
0.15	-	-	-	-	-	-	I-131-277-00
0.22	-	-	-	-	-	I-131-262-00	I-131-278-00
0.33	-	-	-	-	-	I-131-263-00	I-131-279-00
0.47	-	I-131-169-00	-	-	-	I-131-264-00	I-131-280-00
0.68	-	-	-	I-131-258-00	-	I-131-265-00	I-131-281-00
1.0	-	I-131-254-00	-	-	-	I-131-266-00	I-131-282-00
1.5	-	I-131-250-00	-	-	-	I-131-267-00	I-131-283-00
2.2	-	-	-	I-131-259-00	-	I-131-268-00	I-131-284-00
3.3	-	-	I-131-255-00	-	-	I-131-269-00	-
4.7	-	I-131-251-00	I-131-171-00	-	-	I-131-270-00	-
6.8	-	-	-	I-131-260-00	-	I-131-271-00	-
10	-	-	I-131-256-00	-	-	I-131-272-00	-
15	-	I-131-252-00	-	-	I-131-261-00	-	-
22	-	-	I-131-257-00	-	-	-	-
33	I-131-176-00	I-131-253-00	I-131-173-00	-	-	-	-
47	I-131-188-00	I-131-174-00	-	-	-	-	-
100	I-131-177-00	-	-	-	-	-	-

STR-V45L

1/16 WATT CARBON RESISTOR

Ω	Part No.	Ω	Part No.	Ω	Part No.	Ω	Part No.	Ω	Part No.	Ω	Part No.	Ω	Part No.
2.0	—	13	—	91	1-210-354-00	620	1-210-367-00	4.3k	1-209-772-00	30k	1-210-380-00	200k	1-210-839-00
2.2	—	15	—	100	1-210-355-00	680	1-210-106-00	4.7k	1-209-773-00	33k	1-210-381-00	220k	1-210-840-00
2.4	—	16	—	110	1-210-356-00	750	1-210-107-00	5.1k	1-209-774-00	36k	1-210-394-00	240k	—
2.7	—	18	1-211-688-00	120	1-210-357-00	820	1-210-108-00	5.6k	1-209-775-00	39k	1-210-382-00	270k	1-210-841-00
3.0	—	20	—	130	1-210-358-00	910	1-210-368-00	6.2k	1-209-776-00	43k	1-210-383-00	300k	—
3.3	—	22	—	150	1-210-102-00	1.0k	1-204-122-00	6.8k	1-209-777-00	47k	1-210-384-00	330k	1-210-842-00
3.6	—	24	—	160	1-210-359-00	1.1k	1-210-369-00	7.5k	1-209-778-00	51k	1-210-385-00	360k	—
3.9	—	27	—	180	1-210-360-00	1.2k	1-209-765-00	8.2k	1-209-779-00	56k	1-210-386-00	390k	1-210-843-00
4.3	—	30	1-210-845-00	200	1-210-361-00	1.3k	1-210-370-00	9.1k	1-209-780-00	62k	1-210-387-00	430k	—
4.7	—	33	1-210-846-00	220	1-210-362-00	1.5k	1-209-766-00	10k	1-209-781-00	68k	1-210-388-00	470k	1-210-844-00
5.1	—	36	1-210-847-00	240	1-209-762-00	1.6k	1-210-371-00	11k	1-210-374-00	75k	1-210-389-00	510k	—
5.6	—	39	1-210-848-00	270	1-210-363-00	1.8k	1-209-878-00	12k	1-210-111-00	82k	1-210-390-00	560k	1-211-695-00
6.2	—	43	1-210-849-00	300	1-210-364-00	2.0k	1-209-767-00	13k	1-210-375-00	91k	1-210-391-00	620k	—
6.8	—	47	1-210-395-00	330	1-209-763-00	2.2k	1-209-768-00	15k	1-210-112-00	100k	1-210-115-00	680k	1-211-696-00
7.5	—	51	1-210-101-00	360	1-210-103-00	2.4k	1-209-769-00	16k	1-210-376-00	110k	—	750k	—
8.2	—	56	1-210-351-00	390	1-210-365-00	2.7k	1-209-770-00	18k	1-210-113-00	120k	1-210-836-00	820k	1-211-698-00
9.1	—	62	1-210-352-00	430	1-210-366-00	3.0k	1-210-372-00	20k	1-210-377-00	130k	—	910k	—
10	—	68	1-210-353-00	470	1-209-764-00	3.3k	1-204-123-00	22k	1-210-114-00	150k	1-210-837-00	1M	—
11	—	75	1-210-392-00	510	1-210-104-00	3.6k	1-210-373-00	24k	1-210-378-00	160k	—		
12	—	82	1-210-393-00	560	1-210-105-00	3.9k	1-209-771-00	27k	1-210-379-00	180k	1-210-838-00		


1/8 WATT CARBON RESISTOR

Ω	Part No.												
2.0	—	13	1-246-821-00	91	1-246-831-00	620	1-246-841-00	4.3k	1-246-851-00	30k	1-246-861-00	200k	1-246-871-00
2.2	1-246-751-00	15	1-246-761-00	100	1-246-771-00	680	1-246-781-00	4.7k	1-246-791-00	33k	1-246-801-00	220k	1-246-811-00
2.4	—	16	1-246-822-00	110	1-246-832-00	750	1-246-842-00	5.1k	1-246-852-00	36k	1-246-862-00	240k	1-247-054-00
2.7	1-246-752-00	18	1-246-762-00	120	1-246-772-00	820	1-246-782-00	5.6k	1-246-792-00	39k	1-246-802-00	270k	1-247-046-00
3.0	—	20	1-246-823-00	130	1-246-833-33	910	1-246-843-00	6.2k	1-246-853-00	43k	1-246-863-00	300k	1-247-055-00
3.3	1-246-753-00	22	1-246-763-00	150	1-246-773-00	1.0k	1-246-783-00	6.8k	1-246-793-00	47k	1-246-803-00	330k	1-247-047-00
3.6	—	24	1-246-824-00	160	1-246-834-00	1.1k	1-246-844-00	7.5k	1-246-854-00	51k	1-246-864-00	360k	1-247-056-00
3.9	1-246-754-00	27	1-246-764-00	180	1-246-774-00	1.2k	1-246-784-00	8.2k	1-246-794-00	56k	1-246-804-00	390k	1-247-048-00
4.3	—	30	1-246-825-00	200	1-246-835-00	1.3k	1-246-845-00	9.1k	1-246-855-00	62k	1-246-865-00	430k	1-247-057-00
4.7	1-246-755-00	33	1-246-765-00	220	1-246-775-00	1.5k	1-246-785-00	10k	1-246-795-00	68k	1-246-805-00	470k	1-247-049-00
5.1	—	36	1-246-826-00	240	1-246-836-00	1.6k	1-246-846-00	11k	1-246-856-00	75k	1-246-866-00	510k	1-247-058-00
5.6	1-246-756-00	39	1-246-766-00	270	1-246-776-00	1.8k	1-246-786-00	12k	1-246-796-00	82k	1-246-806-00	560k	1-247-050-00
6.2	—	43	1-246-827-00	300	1-246-837-00	2.0k	1-246-847-00	13k	1-246-857-00	91k	1-246-867-00	620k	1-247-059-00
6.8	1-246-757-00	47	1-246-767-00	330	1-246-777-00	2.2k	1-246-787-00	15k	1-246-797-00	100k	1-246-807-00	680k	1-247-051-00
7.5	1-246-818-00	51	1-246-828-00	360	1-246-838-00	2.4k	1-246-848-00	16k	1-246-858-00	110k	1-246-868-00	750k	1-247-060-00
8.2	1-246-758-00	56	1-246-768-00	390	1-246-778-00	2.7k	1-246-788-00	18k	1-246-798-00	120k	1-246-808-00	820k	1-247-052-00
9.1	1-246-819-00	62	1-246-829-00	430	1-246-839-00	3.0k	1-246-849-00	20k	1-246-859-00	130k	1-246-869-00	910k	1-247-061-00
10	1-246-759-00	68	1-246-769-00	470	1-246-779-00	3.3k	1-246-789-00	22k	1-246-799-00	150k	1-246-809-00	1M	1-247-053-00
11	1-246-820-00	75	1-246-830-00	510	1-246-840-00	3.6k	1-246-850-00	24k	1-246-860-00	160k	1-246-870-00		
12	1-246-760-00	82	1-246-770-00	560	1-246-780-00	3.9k	1-246-790-00	27k	1-246-800-00	180k	1-246-810-00		

1/4 WATT CARBON RESISTORS

Ω	Part No.										
1.0	1-246-401-00	10	1-246-425-00	100	1-246-449-00	1.0k	1-246-473-00	10k	1-246-497-00	100k	1-246-521-00
1.1	1-246-402-00	11	1-246-426-00	110	1-246-450-00	1.1k	1-246-474-00	11k	1-246-498-00	110k	1-246-522-00
1.2	1-246-403-00	12	1-246-427-00	120	1-246-451-00	1.2k	1-246-475-00	12k	1-246-499-00	120k	1-246-523-00
1.3	1-246-404-00	13	1-246-428-00	130	1-246-452-00	1.3k	1-246-576-00	13k	1-246-500-00	130k	1-246-524-00
1.5	1-246-405-00	15	1-246-429-00	150	1-246-453-00	1.5k	1-246-577-00	15k	1-246-501-00	150k	1-246-525-00
1.6	1-246-406-00	16	1-246-430-00	160	1-246-454-00	1.6k	1-246-578-00	16k	1-246-502-00	160k	1-246-526-00
1.8	1-246-407-00	18	1-246-431-00	180	1-246-455-00	1.8k	1-246-579-00	18k	1-246-503-00	180k	1-246-527-00
2.0	1-246-408-00	20	1-246-432-00	200	1-246-456-00	2.0k	1-246-580-00	20k	1-246-504-00	200k	1-246-528-00
2.2	1-246-409-00	22	1-246-433-00	220	1-246-457-00	2.2k	1-246-581-00	22k	1-246-505-00	220k	1-246-529-00
2.4	1-246-410-00	24	1-246-434-00	240	1-246-458-00	2.4k	1-246-582-00	24k	1-246-506-00	240k	1-246-530-00
2.7	1-246-411-00	27	1-246-435-00	270	1-246-459-00	2.7k	1-246-583-00	27k	1-246-507-00	270k	1-246-531-00
3.0	1-246-412-00	30	1-246-436-00	300	1-246-460-00	3.0k	1-246-584-00	30k	1-246-508-00	300k	1-246-532-00
3.3	1-246-413-00	33	1-246-437-00	330	1-246-461-00	3.3k	1-246-585-00	33k	1-246-509-00	330k	1-246-533-00
3.6	1-246-414-00	36	1-246-438-00	360	1-246-462-00	3.6k	1-246-586-00	36k	1-246-510-00	360k	1-246-534-00
3.9	1-246-415-00	39	1-246-439-00	390	1-246-463-00	3.9k	1-246-587-00	39k	1-246-511-00	390k	1-246-535-00
4.3	1-246-416-00	43	1-246-440-00	430	1-246-464-00	4.3k	1-246-488-00	43k	1-246-512-00	430k	1-246-536-00
4.7	1-246-417-00	47	1-246-441-00	470	1-246-465-00	4.7k	1-246-489-00	47k	1-246-513-00	470k	1-246-537-00
5.1	1-246-418-00	51	1-246-442-00	510	1-246-466-00	5.1k	1-246-490-00	51k	1-246-514-00	510k	1-246-538-00
5.6	1-246-419-00	56	1-246-443-00	560	1-246-467-00	5.6k	1-246-491-00	56k	1-246-515-00	560k	1-246-539-00
6.2	1-246-420-00	62	1-246-444-00	620	1-246-468-00	6.2k	1-246-492-00	62k	1-246-516-00	620k	1-246-540-00
6.8	1-246-421-00	68	1-246-445-00	680	1-246-469-00	6.8k	1-246-493-00	68k	1-246-517-00	680k	1-246-541-00
7.5	1-246-422-00	75	1-246-446-00	750	1-246-470-00	7.5k	1-246-494-00	75k	1-246-518-00	750k	1-246-542-00
8.2	1-246-423-00	82	1-246-447-00	820	1-246-471-00	8.2k	1-246-495-00	82k	1-246-519-00	820k	1-246-543-00
9.1	1-246-424-00	91	1-246-448-00	910	1-246-472-00	9.1k	1-246-496-00	91k	1-246-520-00	910k	1-246-544-00


HARDWARE NOMENCLATURE



Indicated slotted-head only.

Unless otherwise indicated, it means cross-recessed head (Phillips type).

Nut, Washer, Retaining ring:



Reference Designation	Shape	Description	Remarks
SELF-TAPPING SCREWS			
TA		self-tapping screw	ex. TA, P 3 x 10
PTP		pan-head self-tapping screw	binding-head self-tapping (TA, B) screw for replacement
PTPWH		pan-head self-tapping screw with washer face	binding-head self-tapping (TA, B) screw and flat washer for replacement
PTTWH		pan-head thread-rolling screw with washer face	binding-head (B) screw and flat washer for replacement
SET SCREWS			
SC		set screw	
SC		hexagon-socket set screw	ex. SC 2.6 x 4, hexagon socket
NUT			
N		nut	
WASHERS			
W		flat washer	
SW		spring washer	
LW		internal-tooth lock washer	ex. LW3, internal
LW		external-tooth lock washer	ex. LW3, external
RETAINING RINGS			
E		retaining ring	
G		grip-type retaining ring	

Reference Designation	Shape	Description	Remarks
SCREWS			
P		pan-head screw	binding-head (B) screw for replacement
PWH		pan-head screw with washer face	binding-head (B) screw and flat washer for replacement
PS		pan-head screw with spring washer	binding-head (B) screw and spring washer for replacement
PSPW		pan-head screw with spring and flat washers	binding-head (B) screw and spring and flat washers for replacement
R		round-head screw	binding-head (B) screw for replacement
K		flat-countersunk-head screw	
RK		oval-countersunk-head screw	
B		binding-head screw	
T		truss-head screw	binding-head (B) screw for replacement
F		flat-filister-head screw	
RF		filister-head screw	
BV		braizer-head screw	