

A.R.T. - MODD. « G 851 » - « RG 851 »

Modd. « G851 » « RG851 »

## GAMME D'ONDA

Onde corte I<sup>a</sup> 13 ÷ 22 m.  
» corte II<sup>a</sup> 22 ÷ 36 m.  
» corte III<sup>a</sup> 36 ÷ 65 m.  
» medie 190 ÷ 570 m.  
» lunghe 1000 ÷ 2000 m.  
Preso fono - Uscita: 8 W.

## VALVOLE

$V_1 = \text{ECH4}$   
 $V_2 = \text{EF9}$   
 $V_3 = \text{EM4}$   
 $V_4 = \text{EBC3}$   
 $V_5 = \text{EF9}$   
 $V_6 = \text{EL3}$   
 $V_7 = \text{EL3}$   
 $V_8 = 5Y3 \text{ sul Mod. G 851}$   
 $5X4 \text{ sul Mod. RG 851}$

MF = 467 kHz.


Bobina di campo dell'elettrodinamico = 2000  $\Omega$ .

## RESISTORI

$R_1 = 0,5 \text{ M}\Omega \text{ } 1/2 \text{ W}$   
 $R_2 = 200 \text{ } \Omega \text{ } 1 \text{ W}$   
 $R_3 = 50.000 \text{ } \Omega \text{ } 1/2 \text{ W}$   
 $R_4 = 30.000 \text{ } \Omega \text{ } 1 \text{ W}$   
 $R_5 = 30.000 \text{ } \Omega \text{ } 1 \text{ W}$   
 $R_6 = 300 \text{ } \Omega \text{ } 1/2 \text{ W}$   
 $R_7 = 0,1 \text{ M}\Omega \text{ } 1 \text{ W}$

$R_8 = 2 \text{ M}\Omega \text{ } 1/2 \text{ W}$   
 $R_9 = 1 \text{ M}\Omega \text{ } 1/2 \text{ W}$   
 $R_{10} = 1 \text{ M}\Omega \text{ } 1/2 \text{ W}$

$R_{11} = 500 \text{ } \Omega \text{ } 1/2 \text{ W}$   
 $R_{12} = 50.000 \text{ } \Omega \text{ } 1/2 \text{ W}$   
 $R_{13} = 0,25 \text{ M}\Omega \text{ } 1/2 \text{ W}$

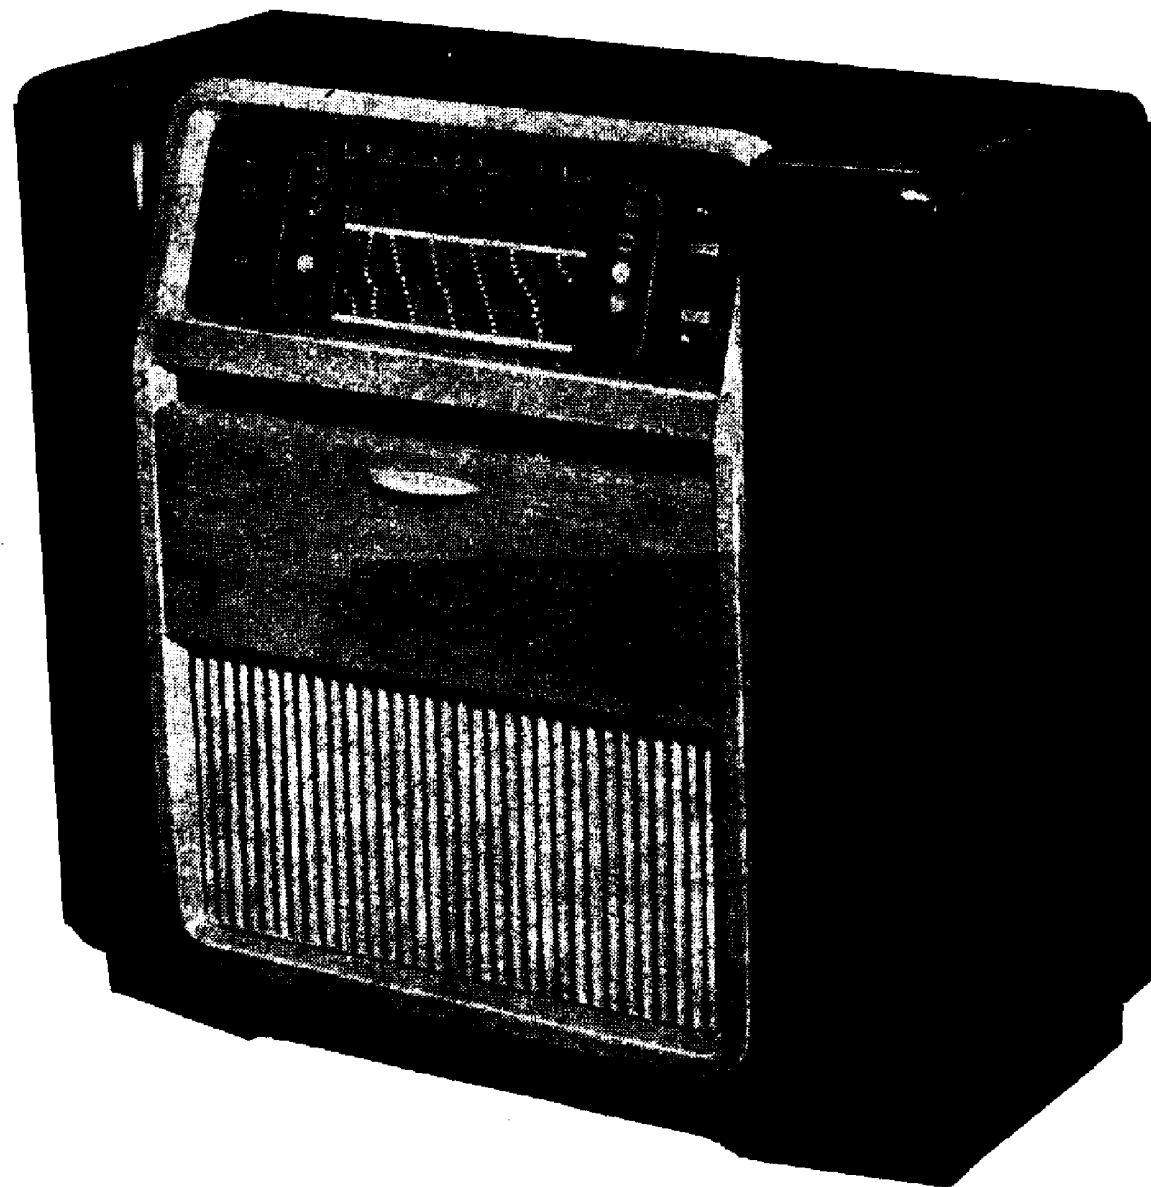


Il mod. « RDG 532 » Depaphon.

$R_{11} = 1 \text{ M}\Omega \text{ Pot. c. i.}$   
 $R_{12} = 0,75 \text{ M}\Omega \text{ 1 W}$   
 $R_{13} = 1 \text{ M}\Omega \text{ 1/2 W}$   
 $R_{14} = 1 \text{ M}\Omega \text{ 1/2 W}$   
 $R_{15} = 0,25 \text{ M}\Omega \text{ 1 W}$   
 $R_{16} = 0,25 \text{ M}\Omega \text{ 1 W}$   
 $R_{17} = 2 \text{ M}\Omega \text{ 1 W}$   
 $R_{18} = 1 \text{ M}\Omega \text{ Potenz.}$   
 $R_{19} = 1 \text{ M}\Omega \text{ 1/2 W}$   
 $R_{20} = 1 \text{ M}\Omega \text{ c. i.}$   
 $R_{21} = 2 \text{ M}\Omega \text{ 1 W}$   
 $R_{22} = 150 \text{ }\Omega \text{ 4 W}$   
 $R_{23} = 50.000 \text{ }\Omega \text{ 1/2 W}$   
 $R_{24} = 1 \text{ M}\Omega \text{ 1/2 W}$

## CONDENSATORI

$C_1 = 100 \text{ pF mica}$   
 $C_2 = 200 \text{ pF mica}$   
 $C_3 = 0,1 \text{ }\mu\text{F 1000 V} + 8$   
 $\text{ }\mu\text{F elett.}$   
 $C_4 = C_7 = \text{CVA}$   
 $C_5 = 0,1 \text{ }\mu\text{F 1000 V}$   
 $C_6 = 25 \text{ pF mica}$   
 $C_8 = 350 \text{ pF mica}$   
 $C_9 = 170 \text{ pF mica}$   
 $C_{10} = 0,1 \text{ }\mu\text{F 1500 V}$   
 $C_{11} = 0,1 \text{ }\mu\text{F 1500 V}$   
 $C_{12} = 250 \text{ pF mica}$   
 $C_{13} = 125 \text{ pF mica}$   
 $C_{14} = 0,1 \text{ }\mu\text{F 1000 V}$   
 $C_{15} = 0,1 \text{ }\mu\text{F 1500 V}$   
 $C_{16} = 0,1 \text{ }\mu\text{F 1000 V}$   
 $C_{17} = 250 \text{ pF mica}$   
 $C_{18} = 50.000 \text{ }\mu\text{F 1000 V}$   
 $C_{19} = 200 \text{ pF mica}$   
 $C_{20} = 250 \text{ pF mica}$

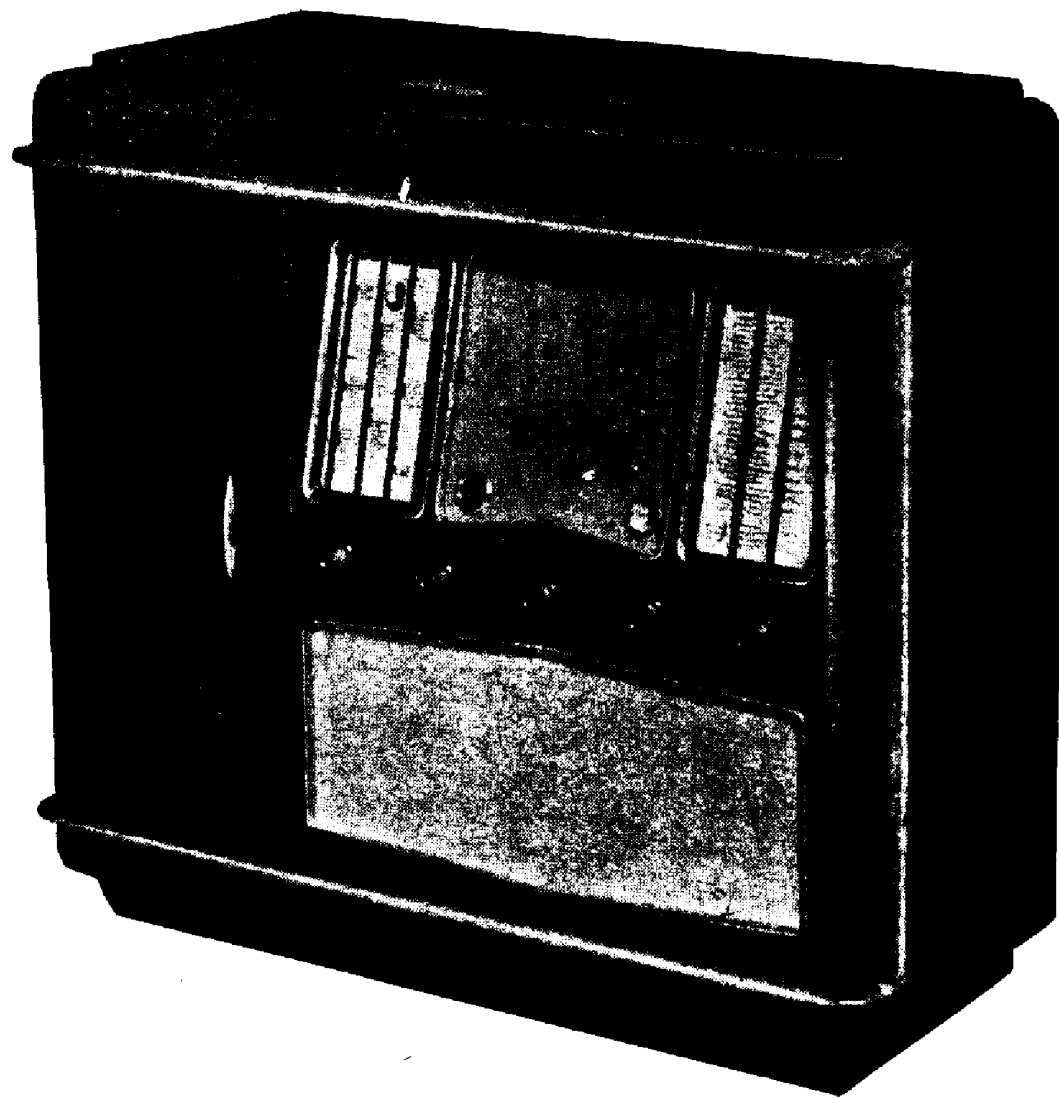

Il mod. « RG 851 » A.R.T.

$C_{21} = 0,1 \text{ }\mu\text{F 1500 V}$   
 $C_{22} = 100 \text{ pF mica}$   
 $C_{23} = 10 \text{ }\mu\text{F elett.}$   
 $C_{24} = 10 \text{ }\mu\text{F elett.}$   
 $C_{25} = 50.000 \text{ pF 1500 V}$   
 $C_{26} = 50.000 \text{ pF 1500 V}$   
 $C_{27} = 5000 \text{ pF 1500 V}$

$C_{28} = 0,1 \text{ }\mu\text{F 1000 V}$   
 $C_{29} = 24 \text{ }\mu\text{F elett.}$   
 $C_{30} = 32 \text{ }\mu\text{F elett.}$   
 $C_{31} = 10 \text{ }\mu\text{F elett.}$   
 $C_{32} = 5000 \text{ pF 1500 V}$   
 $C_{33} = 10.000 \text{ pF 1500 V}$   
 $C_{34} = 100 \text{ pF mica}$