


TENSIONI MISURATE TRA
ELETTRODI E MASSA CON
VOLMETRO 20.000Ω X VOLTA

VALVOLA	PIAGGA	G. S.	G. C.	P. O.	K	F. F.
V	V	V	V	V	V	V
6A8 GT	195	70	-0.4	140	2.2	6
6K7	195	70	-0.4	/	/	6
6Q7	60	/	-0.3	/	/	6
6V8 GT	185	195	/	/	8	6
6X5 GT	250 ~	/	/	/	285	6

IRRADIO B. M. 20

LAMPADINA
V. 6.3 A. 0.25

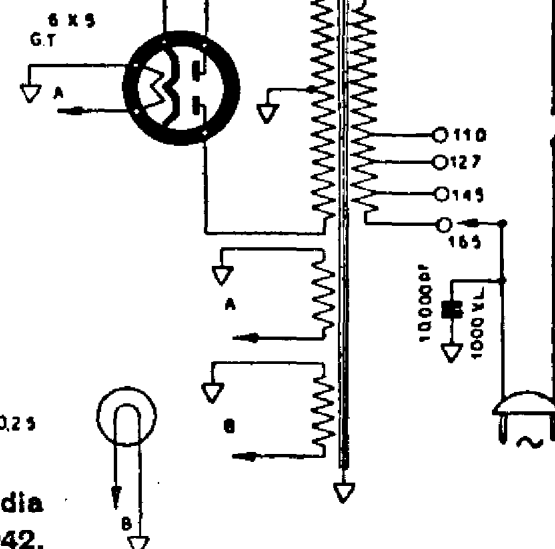

IRRADIO. — Mod. BM20. — Ricevitore di piccole dimensioni: 24 × 18 × 14. — Media
frequenza: 450 kHz. — Potenza d'uscita: 2 W. — Consumo: 35 W. — Produzione 1941-1942.
— Onde medie e corte.