


ZF = 130 KHZ

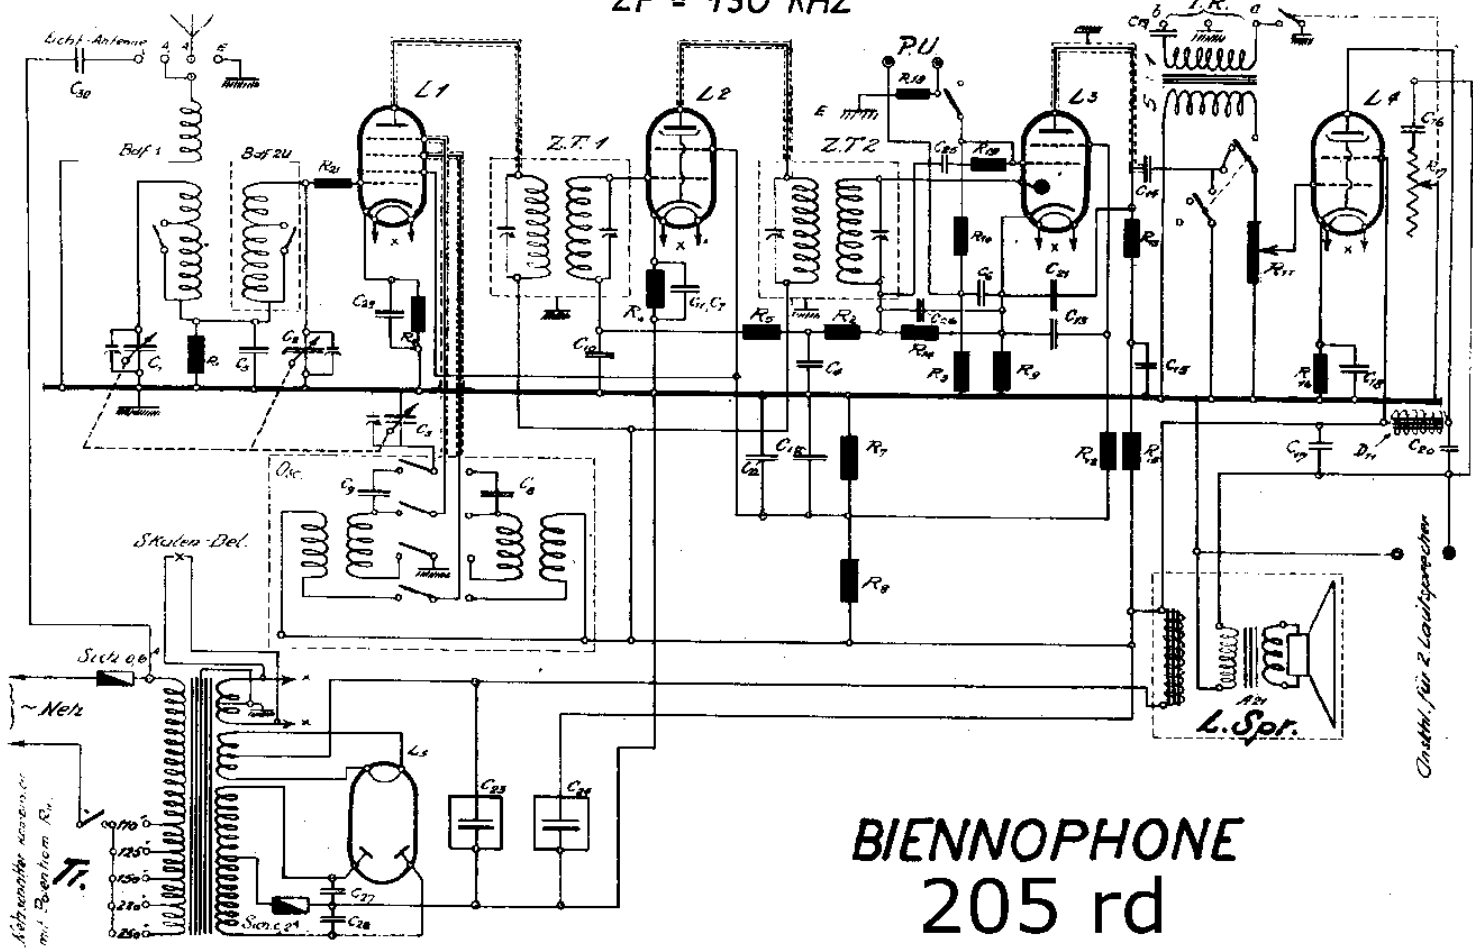

BIENNOPHONE 205 rd

Kondensatoren und Widerstände zu Biennophone Mod. 205 RD

Pos.	Wert	Pos.	Wert
C-4	0,2 MF	C-28	2 x 0,1 MF
C-5	10000 cm	C-29	1 x 0,1 MF
C-6	0,1 MF	C-30	500 cm
C-7	0,1 MF	R-1	0,01 MOhm
C-8	500-650 cm	R-2	1,0 MOhm
C-9	1700-1800 cm	R-3	0,5 MOhm
C-10	0,1 MF	R-4	300 Ohm
C-11	2 x 0,1 MF	R-5	1,0 MOhm
C-12	2 x 0,2 MF	R-6	300 Ohm
C-13	1 MF	R-7	0,02 MOhm
C-14	7200 cm	R-8	0,015 MOhm
C-15	1 MF	R-9	1250 Ohm
C-16	45000 cm	R-10	1,0 MOhm
C-17	1000 cm	R-11	0,5 MOhm
C-18	5 MF	R-12	0,1 MOhm
C-19	0,5 MF	R-13	0,05 MOhm
C-20	0,2 MF	R-14	0,5 MOhm
C-21	250 cm	R-15	0,02 MOhm
C-22	1 x 0,2 MF	R-16	700 Ohm
C-23	8 MF	R-17	20000 Ohm
C-24	8 MF	R-18	0,2 MOhm
C-25	10000 cm	R-19	1,0 MOhm
C-26	100 cm	R-20	0,05 MOhm
C-27	2 x 0,1 MF	R-21	200 Ohm