

TV5-303E/T

TV5-202E
TV5-202V



B & W TV

E: For Continental Europe (excl. France, Monaco, Italy & OIRT members) T: For Italy

Specifications


- Picture Tube: 5", 70° Deflection, Aluminized Screen
Transistor: 25 (5 Silicon—including 3 Epitaxial 20 Germanium)
Diode: 20 (including 4 Selenium)
Channel Coverage: E-2 to E-11 (5-303E), A to H (5-303T)
Maximum Sensitivity: 10 μ V (10Vpp at Picture Tube Cathode)
IF Circuit: 4 Stages with 5 stagger tuned elements
Video IF 26.75 Mc, Sound IF 21.25 Mc, Bandwidth 3.75 Mc/-3 dB—6 dB
Resolution: Vertical 400 lines, Horizontal 300 lines
Sound System: 5.5 Mc Intercarrier System
Power Output Stage OTL System 150 mW.
Speaker 3", 70 Ω Voice Coil
Automatic Control: Pulse-operated AGC, Diode AFC,
Sync. ANS (Automatic Noise Suppressor)
Power Requirement: AC 220V, 50c/s, DC 12V Battery (3.5 AH)
Power Consumption: AC 13W, DC 9.6W (0.8A)
Dimensions: 7-5/8" (W) X 4-1/4" (H) X 7-1/4" (D)
Weight: 8 lb
Glare Proofing: Smoked Filter, 70% Transparency




SONY®
SERVICE MANUAL

CONTENTS


	Page
Specifications for the SONY Micro-TV 5-303E and 5-303T	1
THE SONY MICRO-TV MODEL 5-303E and 5-303T	4
GENERAL	4
THE TUNER	7
SIGNAL CIRCUIT BOARD SECTION	9
DEFLECTION CIRCUIT BOARD AND HIGH-VOLTAGE BLOCK SECTIONS	11
POWER SUPPLY SECTION	14
METHOD OF DISASSEMBLING THE SET	
To Remove the Front Control Panel	15
To Remove the Back Cabinet Cover.....	15
To Remove the Telescopic Antenna and the Tuner.....	15
To Remove the Signal Circuit Board.....	16
To Remove the Deflection Circuit Board	17
To Remove the Chassis from the Front Panel	18
To Remove the Picture Tube.....	19
To Remove the High Voltage Block	19
TROUBLE SHOOTING	
Raster	20
Video Output and Synchronization	22
Sound.....	24

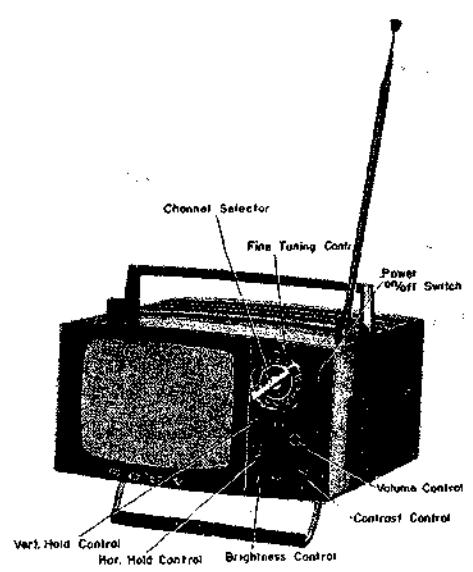


(Fig. 1)

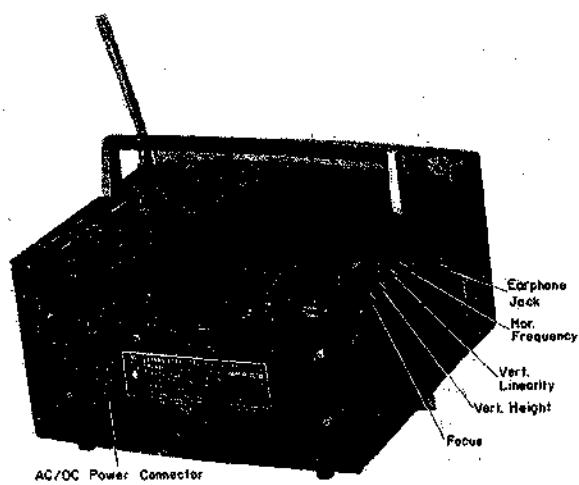

(Fig. 2)

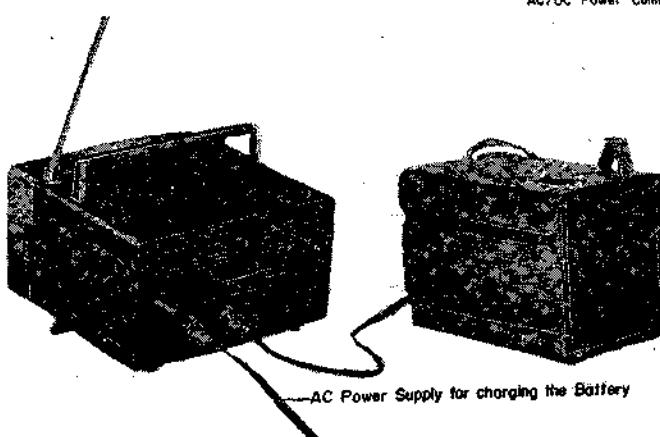

(Fig. 3)

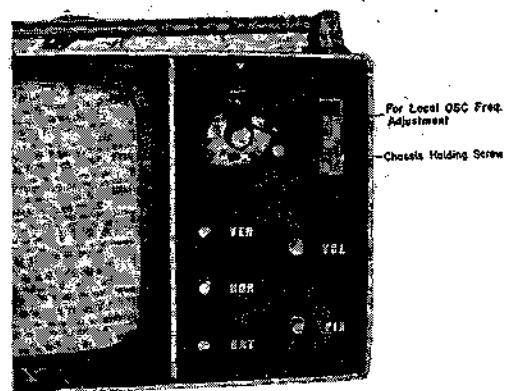

(Fig. 4)

THE SONY MICRO-TV MODEL 5-303E and 5-303T

General

The aim in the designing of the SONY Micro-TV Model 5-303E (5-303T) was the creation of a completely new type of TV set which could be achieved only by the use of transistors.

The concrete requirements given to be met from the start of the design were as follows:

- 1) To be small in size and light in weight.
- 2) To have the lowest power consumption of any mass produced TV set.
- 3) To operate perfectly as a completely portable TV set under all conditions.
- 4) To provide facilities for easy servicing.

To fulfil these requirements, many developments and improvements were made on the components and the circuit arrangements as explained below.

1. Picture Tube 140CB4 (see Fig. 6)

The resolution of the picture depends greatly upon the construction of the picture tube, and the power consumption of the TV set is much influenced by the construction of the electron gun in the tube. Therefore, the key point of success in making a superior TV set is the improvement of the picture tube. The 140CB4 picture tube was specially developed for the SONY Micro-TV 5-303E (5-303T) and has the following features.

a) Resolution

Horizontal 28 lines per cm. (300 lines for full picture)

Vertical 45 lines per cm. (400 lines for full picture)

b) Deflection power

70 degree deflection and a neck diameter of 20 mm (3/4") result in lower deflection power although the anode voltage is as high as 8 KV. This gives a brightness of 500 lux.


c) The power required for the heater is less than 1 watt.

d) The overall length of tube is only 161mm (6-5/16").

e) The cut-off voltage at the first grid is made very low by introducing techniques developed in transistor manufacturing into the assembly of the electron gun. Consequently, satisfactory contrast is obtained at lower video signal output.

f) The square corners of the tube give a larger picture for the size of the tube.

Block Diagram

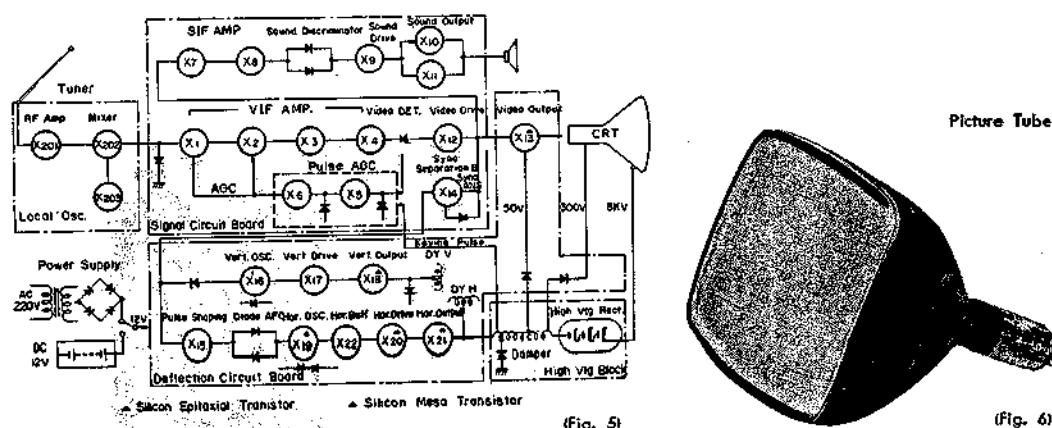

Specifications of Picture Tube 140CB4

Type :	Rectangular Frame	Diagonal Dimension :	137 mm (5-3/8")
Neck Diameter :	20 mm (3/4")	Full Length :	161mm (6-5/16")

Deflection :	Electromagnetic	Focusing :	Electrostatic Automatic
Deflection Angle :	70-degree	Ion Trap :	Unnecessary
Heater Voltage :	12.0V, 70 mA	Anode Voltage :	8 KV
Anode Current :	50μA	2nd Grid Voltage :	300 V
Focusing Voltage :	0~120 V	1st Grid Cut-off Voltage	Appr. -25 V

2. The SONY Epitaxia Transistor 2SC140 (See Fig. 7)

Silicon transistors have been used in high powered circuits in TV sets, such as Video Output Stage, Vertical Output Stage and for the Horizontal Oscillator, Horizontal Drive and Horizontal Output because of their higher working voltage, stable operation at high temperatures and lower ICBO (Low Leakage Current). The disadvantage has been that the internal resistance (Collector Saturation Resistance, RS) was high (app. 70Ω) causing high power consumption. The new SONY Epitaxial Transistor of the Mesa Silicon Type was developed to overcome this disadvantage. The RS of the 2SC140 is 2Ω. Three of these special transistors are used in the Micro-TV Model 5-303E (5-303T). One each is used in the Vertical Output, Horizontal Oscillator and Horizontal Drive. One result of the use of these transistors is that the SONY Micro-TV will operate satisfactorily at an ambient temperature of 35°C (95°F).

Brief Specifications of the SONY Epitaxial Transistor 2SC140

Maximum Collector-Base Voltage :	60 V
Maximum Collector Current :	1A
Collector Dissipation (Max.) :	1.7 W (without heat sink)
Collector Saturation Resistance (RS) :	2Ω
Maximum Junction Temperature :	175°C

3. Automatic Gain Control Circuit

The AGC system is of the pulse type and an Automatic Noise Suppression (ANSI) circuit is included in the synchronizing pulse separation circuit. With the use of these circuit the SONY Micro-TV 5-303 E(5-303T) will maintain synchronization even in a moving car where the signal strength varies suddenly and almost continuously, and even in the presence of strong engine noise radiation.


4. Provision for Easy Servicing

Small size usually means difficult servicing. The SONY Micro-TV Model 5-303E (5-303T) is divided into five sections for easy service. (See the Block Diagram shown in Fig. 5). The sections are : Tuner, Signal Circuit Board, Deflection Circuit Board, High Voltage Block and Power Supply. The Signal Circuit Board and the Deflection Circuit Board are of the Plug-in type so that either of these Boards may be removed as a unit and replaced with a new one for easy and rapid repairing.

Epitaxial Transistor




Level Diagram for Video

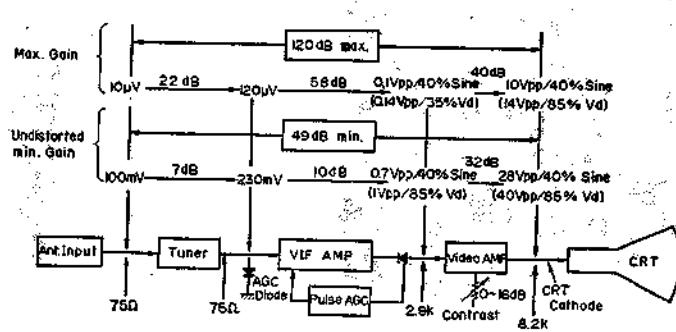

(Fig. 8)


[Fig. 7]

For 5-303E

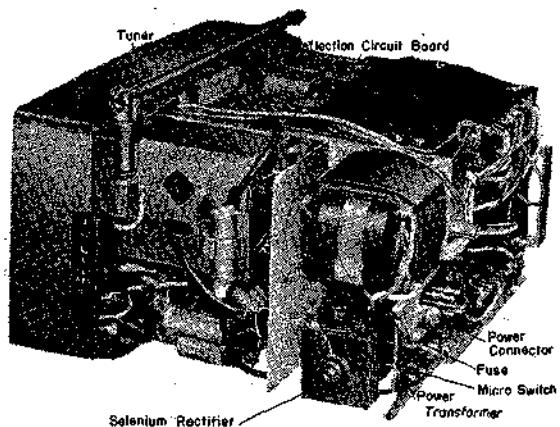


(Fig. 9-1)


For 5-303T

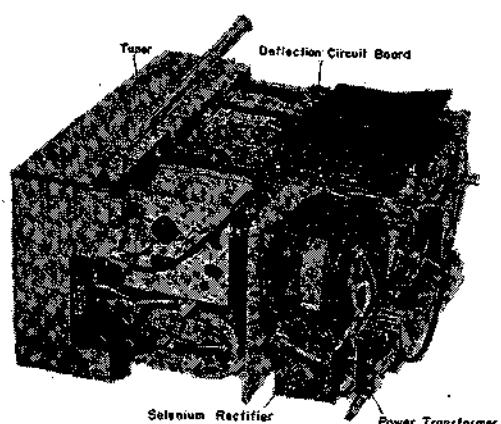


(Fig. 9-2)

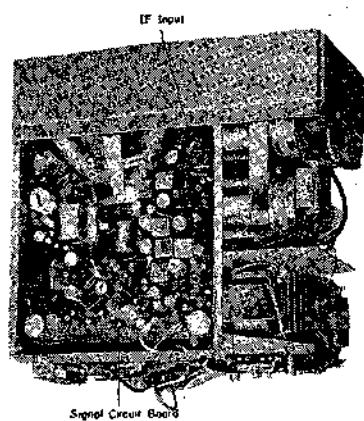


(Fig. 10-1)

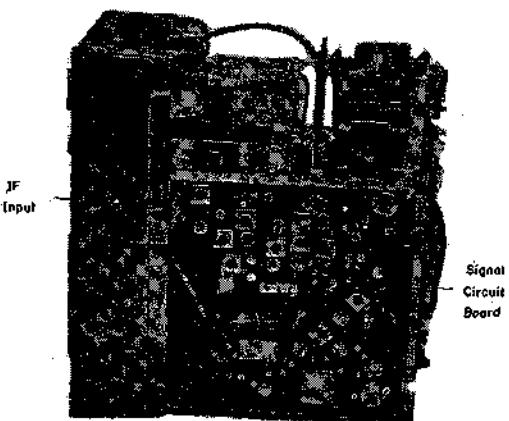


(Fig. 10-2)

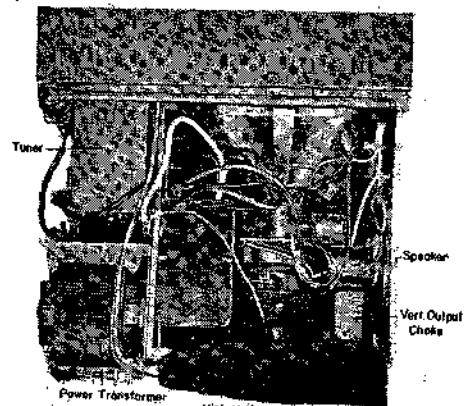


(Fig. 11-1)

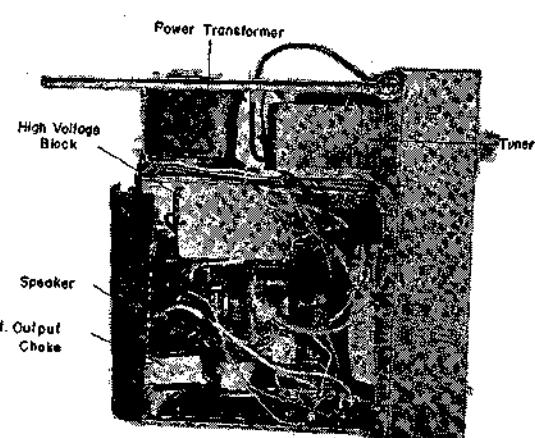

(Fig. 11-2)

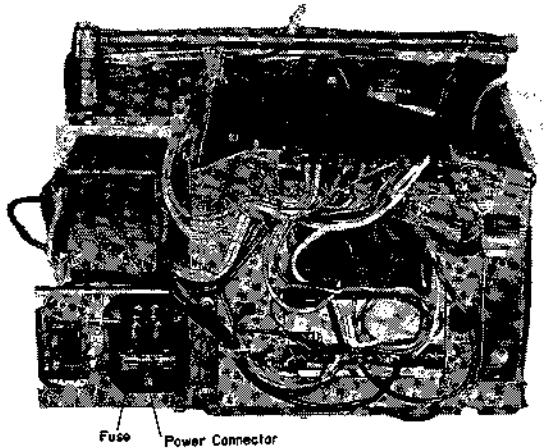

(Fig. 12)

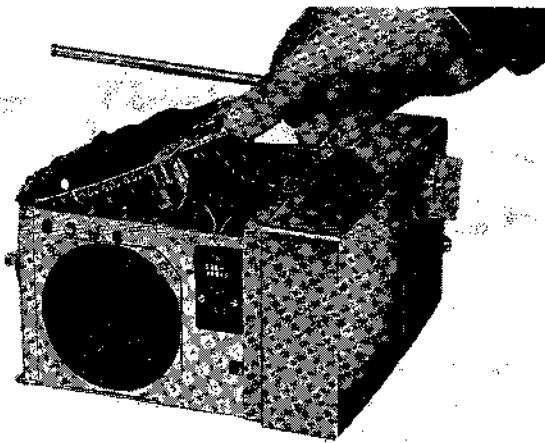


(Fig. 13)


The Tuner

The Tuner uses three PNP Mesa Type Germanium Transistors (2SA161). One is used in the RF Amplifier, one in the Mixer and one in the Local Oscillator. A Disc Type Turret is used for mounting all the coils and contacts for Channel Selection. Special Contact Points have been designed for easy and positive channel selection. The Transistors and other circuit parts are mounted directly above the Channel Switch and are enclosed within the Tuner Shield. The RF coils for each channel are connected in series but the Oscillator Coil for each channel can be adjusted independently. The AGC characteristics of the set is excellent and though the Input Attenuator has been dispensed with, the set with the Telescopic Antenna extended to its full length can be operated at a field strength of as much as 100 mv/m without overloading the circuits. This maximum field strength allowable can be extended further to 1v/m by retracting the Telescopic Antenna. The AGC Diode (D1) acts as a load for the Tuner and limits the output of the tuner to prevent overloading of the following circuits when the signal input level to the tuner is high.


Block Diagram of Tuner

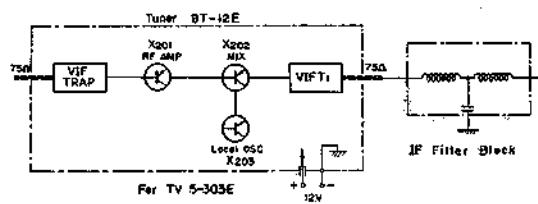


For 5-303E (Fig. 14-1)

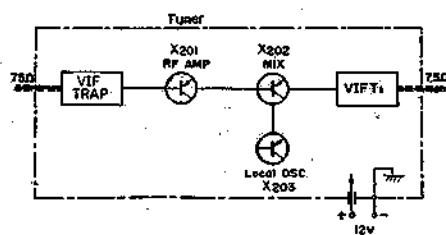


For 5-303T (Fig. 14-2)

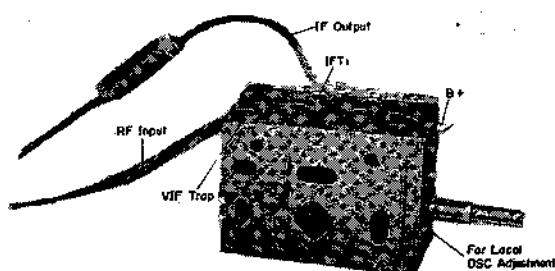

For 5-303E (Fig. 15-1)

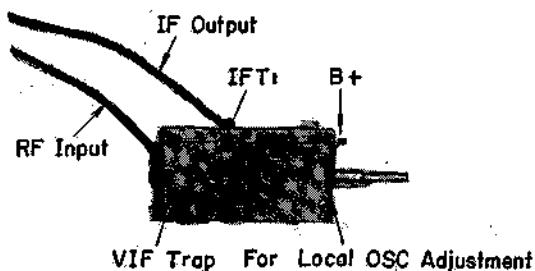

For 5-303T (Fig. 15-2)

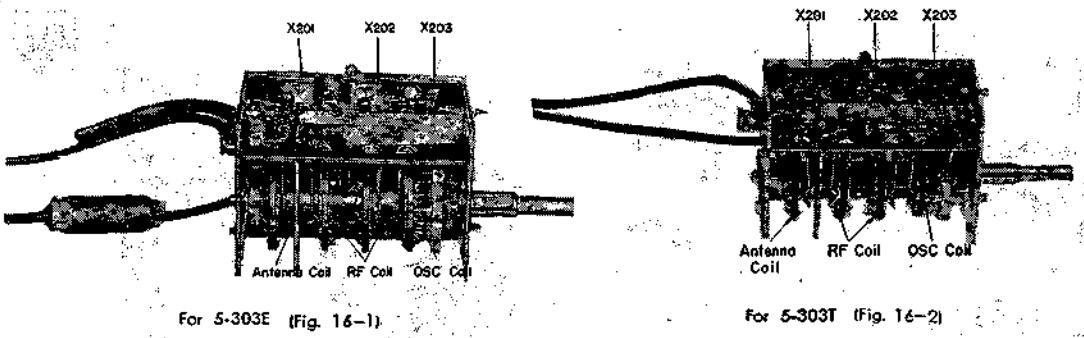


1. The RF Amplifier

The Antenna Impedance is low (75Ω) and the Input Impedance to the RF Transistor is also low. Between the Antenna and the Transistor Input is a tuned circuit of which the resonant impedance is from $1K$ to $4K\Omega$. Taps are used on both sides of the Tuned Circuit for correct impedance matching which is very important. A tap on the Inductance is made on the Antenna side and a tap is made on the Capacitance on the Transistor side for the impedance matching. The RF Transistor output circuit is double tuned with mutual coupling (Double Peaks). This in combination with the single peak of the input circuit gives an essentially flat Bandwidth of 6 Mc for this stage. A Base-grounded Circuit is used for the following reasons.

- 1) The difference in gain between the lower frequencies and the higher frequencies is less in the Base-ground Circuit.
- 2) The adjustment of neutralizing capacitance is very critical in the emitter-grounded circuit so that stability is reduced.
- 3) The Base-grounded Circuit with transistor corresponds to the grounded-grid circuit with vacuum tube. The undesirable feed back between the collector and emitter is greatly reduced in this circuit because the base is grounded. This keeps the amplifier stable even at higher frequencies.


A neutralizing capacitor is used in the emitter circuit as shown in Fig. 17 to prevent oscillation due to stray capacitance. R_{ch} in Fig. 17-1 is used for a choke coil which grounds the neutralizing point for DC while keeping it at an appropriate AC potential.

Basic Circuit for RF Stage

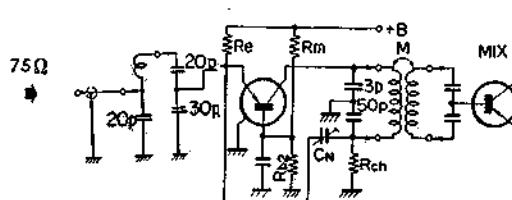


For 5-303E (Fig. 17-1)

Neutralizing Circuit for RF Stage



(Fig. 17-3)

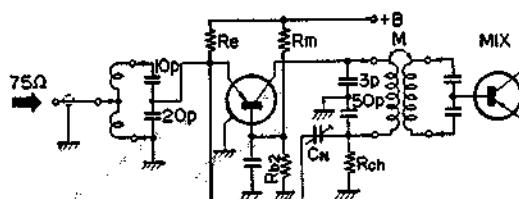

For 5-303T (Fig. 17-2)

A gain of 14 dB is possible at 200 Mc with a circuit of this type but too much gain tends to make the set unstable and hence the gain has been kept to be about 10 dB in our circuit. The gain on the lower channels tends to be higher than that on the higher channels, and so the damping resistors are inserted in the circuit of the lower channels to make the gain difference between the higher and lower channels within ± 1.5 dB.

2. The Mixer Circuit

The Mixer Transistor 2SA161 is emitter-grounded. Impedance matching is made by a capacitance divider in the same way as in the RF Amplifier. The local oscillator signal is injected into the base of the transistor. The power dissipated in the mixer transistor is very much less (about $1/30 \sim 1/50$) than the plate loss of the tube mixer. The voltage of the Local Oscillator signal injected is about 0.2 Vrms, which is also much smaller ($1/10 \sim 1/20$) than that in tube mixer. Furthermore, the Gm of the transistor mixer is high and hence the troubles with mixer noise encountered in tube circuits are of no consequence here in our circuit. This circuit is also neutralized to prevent undesired oscillation.

3. The Local Oscillator

The Local Oscillator uses a Colpitts circuit. This circuit is well suited for this use as it does not require a tap on the oscillator coil. The transistor (2SA161) is base-grounded. The thermistor in the base circuit serves to prevent oscillator drift due to temperature changes. The drift is kept within 200 Kc. As mentioned before, each oscillator coil is independent of the others so that the oscillation frequency can be adjusted from outside the tuner by adjusting the screw type cores. The cylindrical Fine Tuning Capacitors are separately shielded to prevent radiation from the set. The adjustable range of the Local Oscillation is approx. 1.5 Mc for Channel 2 (channel A for 5-303T) and approx. 3 Mc for channel 11 (channel H for 5-303T).

Signal Circuit Board Section

The Signal Circuit Board includes the Video IF, AGC, Sound Amplifier, Video Drive and Synchronizing Pulse Separation circuits. (Fig. 18)

1. Video IF Section

- ☆ The Video IF Section consists of four stages with five stagger tuned elements.
- ☆ The Video IF is 26.75 Mc while the Sound IF is 21.25 Mc.
- ☆ The bandwidth of this section is 3.75 Mc. (Fig. 19-1)

2. Automatic Gain Control (Fig. 19-2)

The Pulse AGC developed by SONY and the Diode AGC are used together in this set.

The operation of the Pulse AGC Circuit is as follows:

The AGC signal is supplied to the Base of X5 from the Video Detector. The pulse which is generated at the Fly Back Transformer is rectified by D6 and applied to the Collector of X5 so that X5 operates only during the synchronizing period. The AGC signal is amplified by X5 and rectified by D3 and is then applied to the Base of X6 through a Filter Circuit. The Time Constant of this circuit is made very small so that the AGC response is extremely fast, thus permitting operation in moving cars where the signal level may vary with extreme rapidity. Then the AGC current from X6 controls the base bias voltage for X1 and X2, and thus the gain of the Video IF stages. The main features of the Pulse AGC are:

1) Quick response

The AGC action is much faster than in conventional circuits because the Time Constant of the filter circuit is very small (approx. $1/1000$ second) compared to that in the conventional one ($1/10 \sim 1/20$ sec.).

Accordingly, stable reception is achieved even when the input signal level varies at a rate of $1/100$ second.


2) Noise free AGC action

The AGC action is hardly influenced by noise since the synchronizing pulses only of the Signal are utilized. On the contrary, in the ordinary peak value AGC system, the AGC voltage varies considerably with the noise content of the video signal.

3) Effective AGC action

The AGC action is quite effective due to higher gain in the AGC loop. Stability against the variation of the temperature and of the power supply voltage is secured also. The AGC Diode D1 (1T22G) connected in parallel with VIFT2 conducts to lower the Q of the IFT2 when the input level exceeds 10 mV.


Block Diagram of Signal Circuit Board

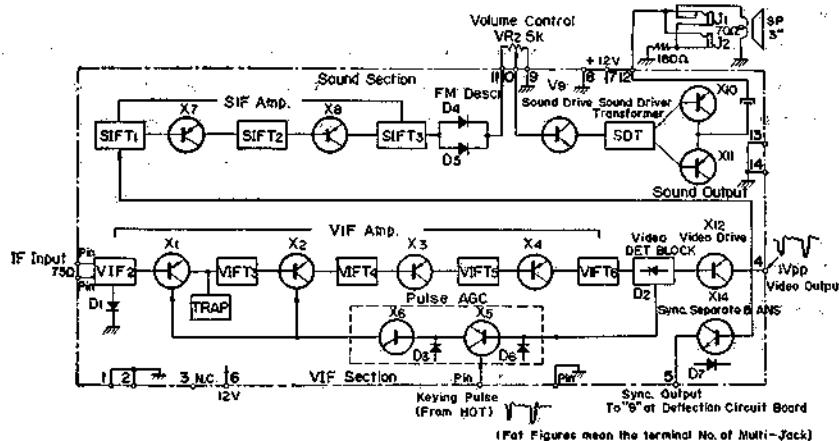

(Fig. 18)


{Fig. 18}

VIF Freq. Response

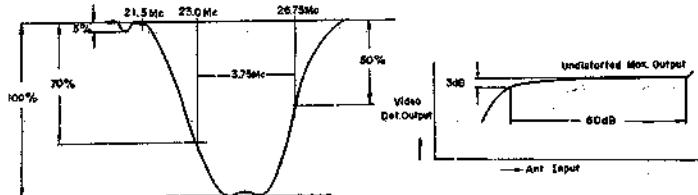

{Fig. 19-3}

AGC Characteristics



(Fig. 19-2)


3. Sound Amplifier Section

The Sound Amplifier Section has two IF stages, a Foster-Seeley Discriminator and two Audio Amplifier Stages. The Output Stage uses the SEPP-OTL (Single Ended Push-pull, No Output Transformer) system. The speaker diameter is 7.5 cm (3") and its impedance is 70Ω . There is a shield plate on SIFT3 to prevent the pulse from the Picture Tube Deflection Yoke to interfere with the sound. The maximum output is 1.50 mW.

4. Video Driver

The Video Driver Circuit is of the Emitter Follower Type (Collector-grounded). The Output Impedance is very low.

Signal Circuit Board (Mounted Side)

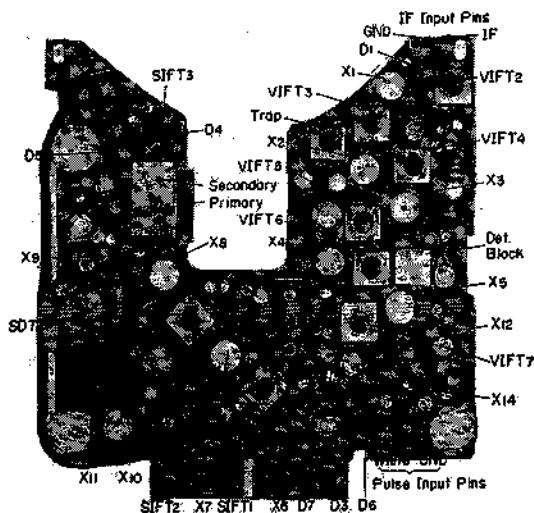

(Fig. 20)

low and this circuit has good frequency characteristics. The Video Signal, Synchronizing Pulse and the Sound are separated at the Emitter of X12 (2SA601).

5. Synchronizing Pulse Separation

The synchronizing pulse is separated at X14 which has the Base-grounded and a Bias Current of approximately Zero. The Vertical Synchronizing Pulse is taken from the collector. This stage includes the ANS (Automatic Noise Suppressor) for the synchronizing pulse in which the Diode D7 serves to shortcircuit the pulsing noises of excessive amplitude. This permits stable operation of the set in a car without fear of interference from the ignition sparks and other pulsive noises.

Deflection Circuit Board and High-Voltage Block Sections


The Deflection Circuit Board contains the Video Output and the Vertical and Horizontal D. C. Drive Circuits.

1. Video Output Circuit (See Fig. 21)

A Mesa Type Silicon Transistor (2SC15, X13) is used in the Video Output Circuit. Over 40 Vpp of output is obtained from this circuit. The Picture Tube requires 30 Vpp for sufficient contrast. The Contrast Control is obtained by varying the feedback current by means of the Variable Resistor VR3 which is located in the Emitter Circuit of X13. The gain of the stage can be varied by 16 dB with this control. The Frequency Response is almost flat to 3 Mc by the use of Shunt-peaking (L501-R508) and Series-peaking (L502-R509). Since the Video IF Bandwidth is 3.75 Mc and the beam spot of the Picture Tube is very small, a very sharp picture is obtained. The Horizontal resolution is more than 300 lines and the Vertical, 400 lines. X13 is cut-off during the Blanking Period by the application of pulses from the Horizontal and Vertical Deflection Circuits. The Blanking Pulses are applied to the Emitter of X13.


Reflection Block

(Fat figures mean the terminal No. of Multi-locus)

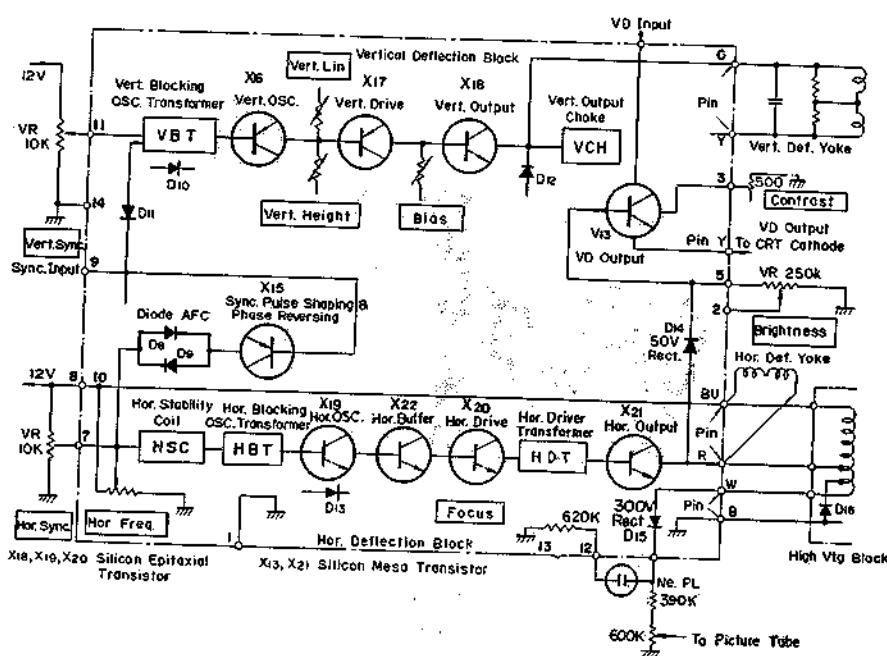


(Fig. 21)

Deflection Circuit Board (Mounted Side)

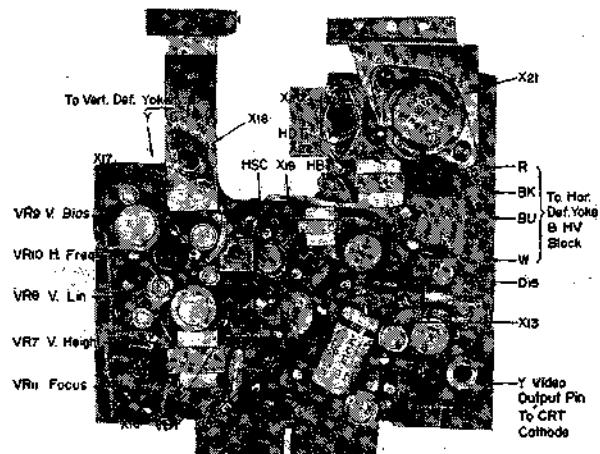


(Fig. 22)

High Voltage Block



(Fig. 23)

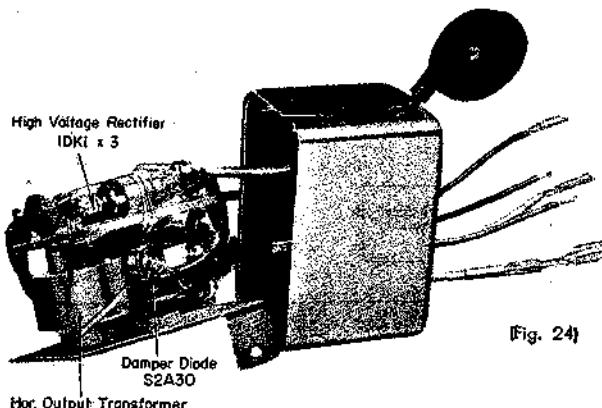

(Fig. 24)

2. Vertical Deflection Section (See Fig. 21)

The Vertical Deflection Sawtooth Wave is generated by blocking oscillations in the circuit of X16. It is then amplified by X17 and X18 and applied to the Vertical Deflection Yoke of the Picture Tube. Vertical Amplitude and Linearity are adjusted by Variable Resistors VR7 and VR8 in the Base Circuit of X17. An Epitaxial Transistor X18 (2SC140) is used in the Vertical Deflection Output Circuit. The Epitaxial Transistor is used in this circuit because of the characteristics of being able to withstand the high pulse voltages present in this circuit and because of freedom from temperature effects. The amplitude of the vertical pulses will not decrease with

a rise in temperature. The Vertical Deflection Coil on the Picture Tube is of the Toroidal Type which is more efficient than the conventional type.

3. Horizontal Deflection Section (See Fig. 21)

The Horizontal Deflection Pulse is generated by blocking oscillations in the circuit of X19 and is amplified by X22 and X20 which drives X21. X21 in turn generates the Sawtooth Wave which drives the Horizontal Deflection Coil. The Horizontal Output Transistor (X21) is also connected to the Hor. Output Transformer and supplies the input for the High Voltage Circuit with the Flyback Pulse during Cut-Off. All of the Transistors in the Horizontal Deflection Circuit are of the Silicon Type. This assures stable operation almost free from temperature effects.

4. High Voltage Block


The High Voltage Block consists of the Horizontal Output Transformer, Damper and the High Voltage Rectifier. All are housed together in one metal case. The Flyback Pulse is stepped up, rectified and the resulting voltages of 8 KV, 300 V and 50 V are applied to the Anode of the Picture Tube, the Second Grid of the Picture Tube and the Video Transistor (X13) respectively. The 8 KV is obtained by means of the three rectifier tubes in voltage tripler circuit.

5. Focus Adjustment


The voltage for the Second Grid of the Picture Tube goes also to the Potentiometer VR11 through the Neon pilot Lamp (Ne-PL). The Focusing Voltage is obtained from this Potentiometer and is variable between 0 and 180 V DC.

Power Supply Section


117 V AC input is converted to 12 V DC by four (4) Selenium Rectifiers in a Bridge Connection as shown in Fig. 26. The Power Transformer is located very near the Picture Tube. Power Transformer with oriented-core is used in this set to prevent any trouble from Flux Leakage.

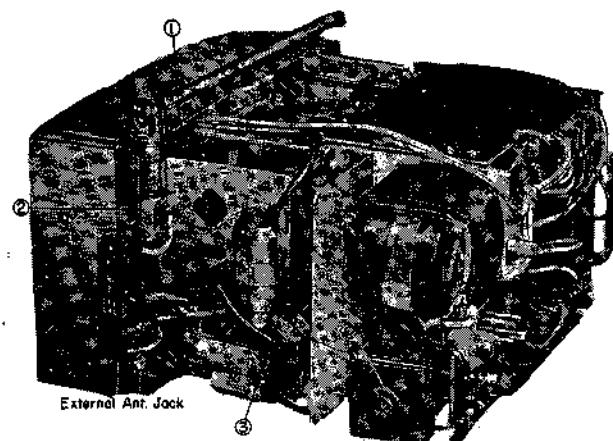

[Fig. 25]

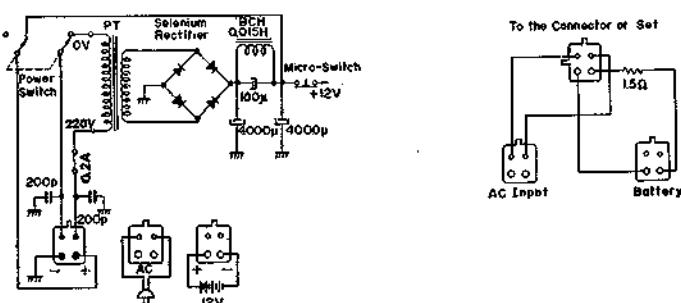

[Fig. 26]



[Fig. 27]


Method of Disassembling the Set

To Remove the Front Control Panel:


1. Pull all Control Knobs straight out. The Fine Tuning Knob may be somewhat difficult to remove—use force.
2. Remove the two small screws on the Front Control Panel. The Front Control Panel can now be removed. (Fig. 28)

To Remove the Back Cabinet Cover:

Remove screw ① (located on the top) and ② (located on the left side). Remove screws ③, ④, ⑤ and ⑥ on the back. The Back Cover can now be removed by pulling straight back. (Fig. 29)

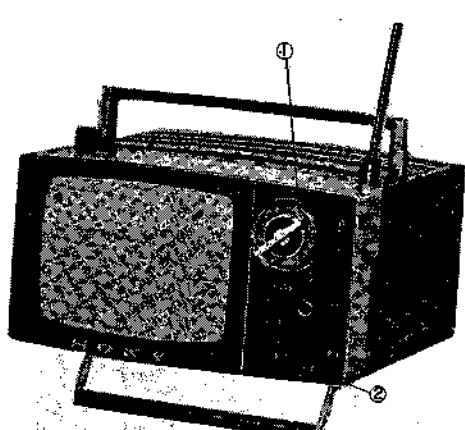


[Fig. 28]

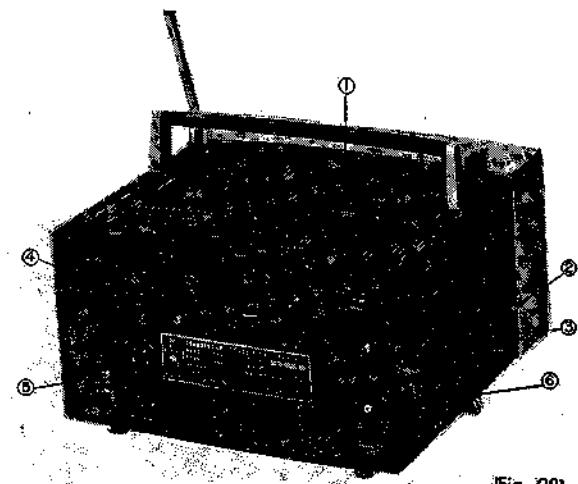

[Fig. 29]


To Remove the Telescopic Antenna and the Tuner:

1. Pull off the Pin Connectors of the Tuner IF Lead Wire and the shielded Ground Wire from the Terminals on the Signal Circuit Board as shown in Fig. 30.
2. Remove screws ①, ② and ③. ③ holds the back of the Tuner. (Fig. 30)
3. Push the Telescopic Antenna and the External Antenna Connectors in the direction shown by the Arrows in Fig. 30. The Telescopic Antenna and the Connectors can now be detached.

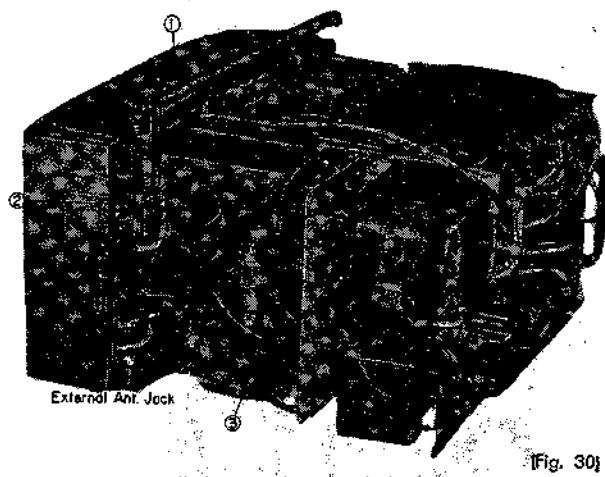


[Fig. 30]

4. The Tuner can be detached by removing two screws on the Front located near the Tuning Control Shaft. One screw is on the Front Panel and the other is inside on the Tuner as shown in Fig. 31:

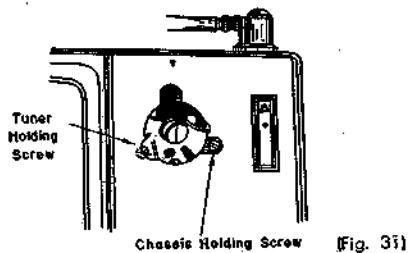


[Fig. 31]

5. The Tuner, Telescopic Antenna and Antenna Connectors can be removed from the set by unsoldering the Red Wire to the Front of the Tuner, the Black Wire to the Chassis and the Yellow Wire with the Resistor to the Antenna Jack. The IF Lead Wire to the Tuner with the Pin Connectors can be pulled through from the back of the Picture Tube. (Fig. 32~33)

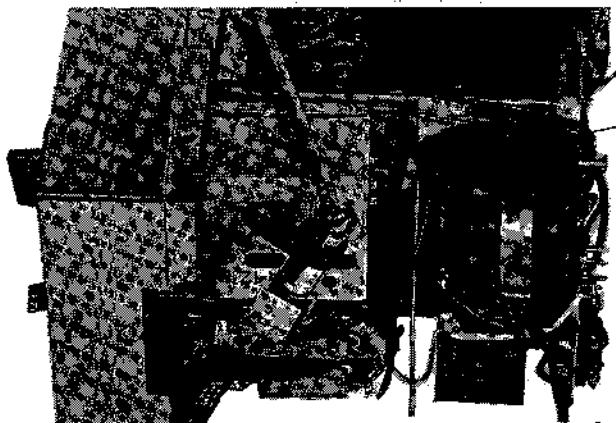


[Fig. 32]

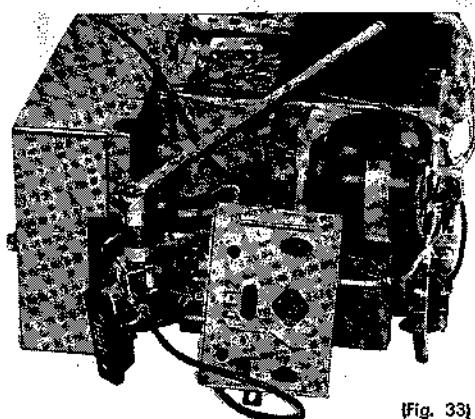

[Fig. 33]

To Remove the Signal Circuit Board:


Remove Screws ① and ②. Slightly loosen the Screw ③ holding the Connector Socket on the back of the Chassis (Fig. 34). Pull out the two Connectors from the Pins on the back side of the Signal Circuit Board. The Block can be removed as a unit by pulling directly away from the Connector Socket.

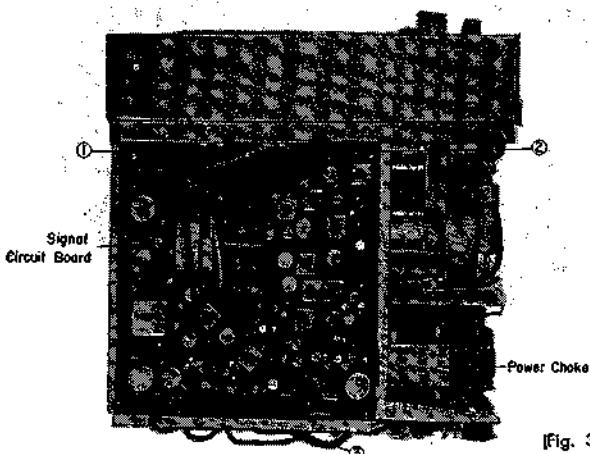

[Fig. 34]


To Remove the Deflection Circuit Board:

1. Remove Screws ①, ② and ③. (Fig. 35)

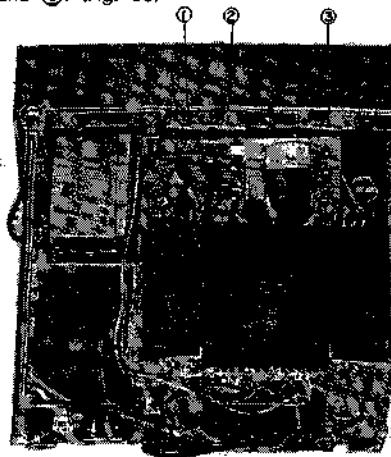


[Fig. 35]

2. Pull out the connectors shown in Fig. 36 & Fig. 37.

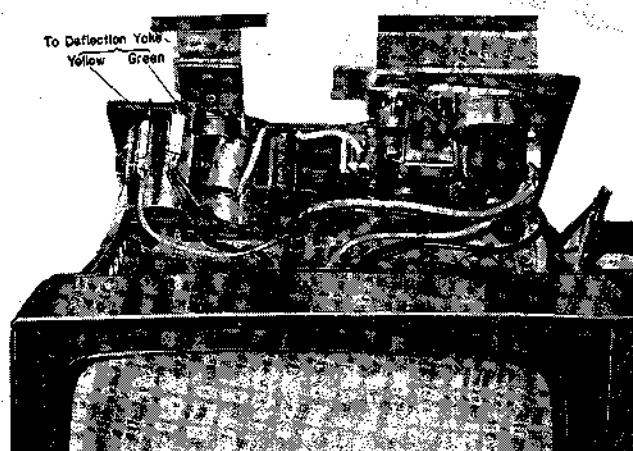


[Fig. 36]

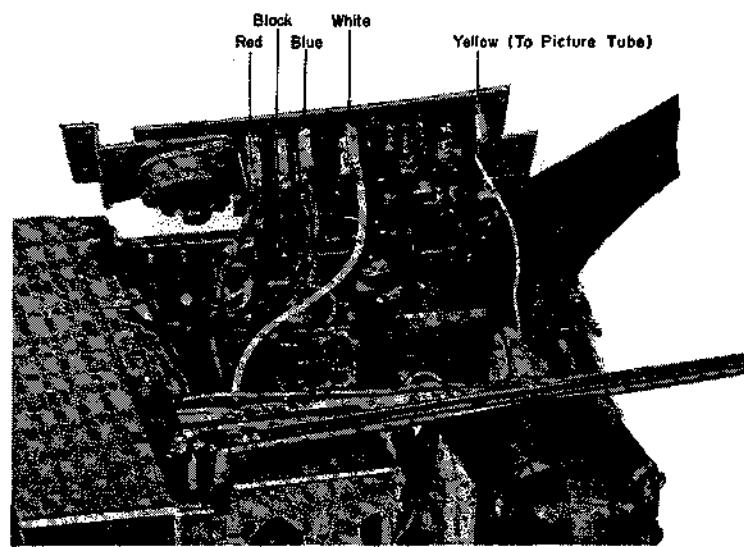


[Fig. 37]

Note: SONY Extension Cable and Circuit Connector are available to make service on the Circuit Boards more convenient. (Fig. 38 & Fig. 39)

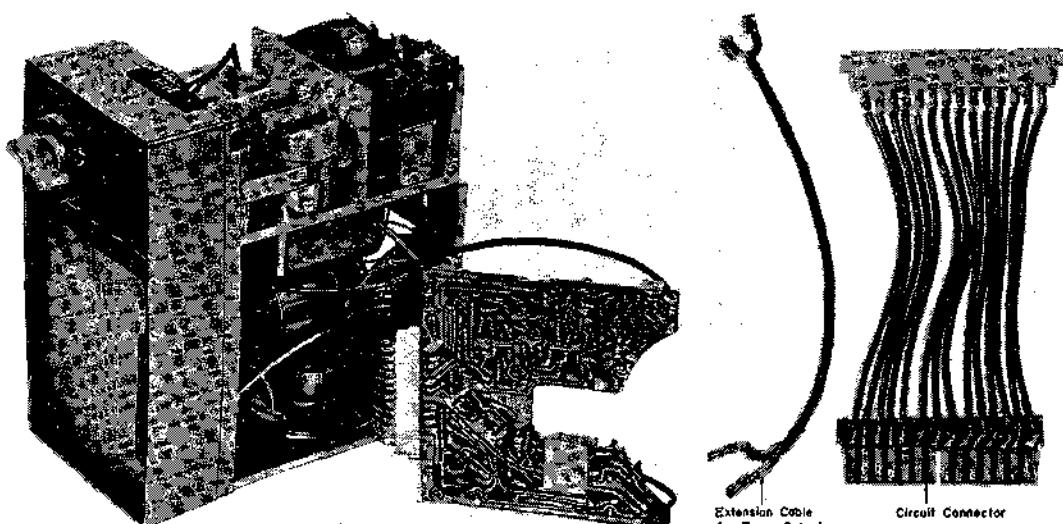

(Fig. 38)

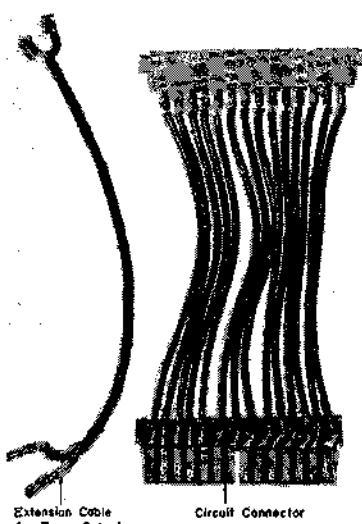


(Fig. 39)


To Remove the Chassis from the Front Panel: (Fig. 40)

Remove Screws ②, ③ and ④. Remove the Screw ① from the front side after pulling off the Channel Selector Knob and the Fine Tuning Knob (Refer to Fig. 4 on page 3).

Unsolder the Red, Blue and Black Wires from the Pin Connectors. These wires go to the Picture Tube Yoke. Also unsolder the Green Wire from the Choke Coil located just below the Speaker. Pull off the High Voltage Anode Connector from the side of the Picture Tube. This is a Snap Fastener but use caution in removing it. Pull off the Socket of the Picture Tube straight back.

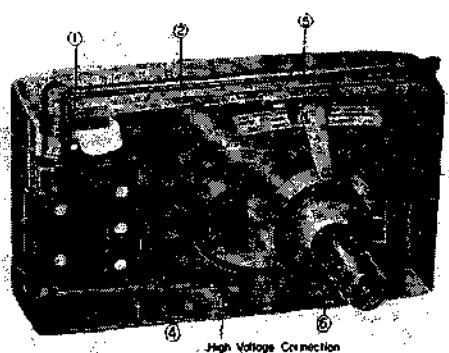

(Fig. 40)

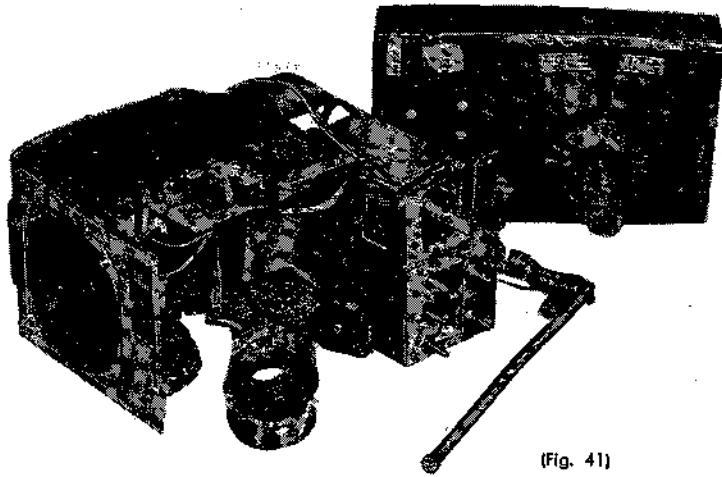

(Fig. 41)

To Remove the Picture Tube:

Remove the Screws and Nuts ⑤ and ⑥ shown in Fig. 40 and lift up the Picture Tube.

To Remove the High Voltage Block:

1. Unsolder three lead wires (Red, Blue & Black).
2. Pull off the Anode Cap.
3. Pull off the Pulse Supplying Pin Connectors coming from the Signal Circuit Board.
4. Remove the Phillips Screw

NOTE: It is not recommended that the High Voltage Block be disassembled because a special Insulating Material is used inside to coat all High Voltage Points.

Trouble Shooting

by Replacement of the Defective Block

Provisions have been made in this Micro TV for easy servicing. The main part of the set is made of the four blocks of the Tuner, the Signal Circuit Board, the Deflection Circuit Board, and the High Voltage Block. Each of these blocks has complete interchangeability and hence the servicing can be performed by simply replacing the defective Block with a new one.

The ways of judging which Block is defective and the method of replacing the Blocks will be given below. In servicing according to this method, the following tools and parts are needed.

Replacement Blocks : (See Fig. 42)

Tuner, Signal Circuit Board, Deflection Circuit Board, and High Voltage Block

Tools and Meters :

Circuit-tester, of internal resistance around $20\text{ K}\Omega/\text{V}$ Cord with Clips.....2 pieces

Electrolytic Condenser, $3\mu\text{F}$, 50 V or more.....1 piece

Resistor, around $15\text{ K}\Omega$1 piece

Screw Drivers

For 3 mm Screws, Phillips and ordinary

For 2.6 mm Screws, Phillips and ordinary

No. 3 for watches (for adjustment of local oscillator)

Tweezers

Soldering Iron

Raster

1. No Raster and No Sound

Suspectable Item : \star Power Supply

Check the power supply. If there is no trouble in the power supply, there must be two or more Blocks defective. Then, proceed with the checking according to the following.

2. No Raster

See first whether the Neon Lamp is lit.

1) The Neon Lamp is OFF.

Suspectable Items : \star Deflection Circuit Board

\star High Voltage Block

a) Replace the Deflection Circuit Board.

b) If the Neon Lamp is not lit after (a), replace the High Voltage Block.

2) The Neon Lamp is lit.


Suspectable Items : \star High Voltage Block

\star The Picture Tube

\star The Brightness Control Circuit

a) See whether the filament of the Picture Tube is ON. If the filament is OFF, check the socket of the Picture Tube. The pins for the filament are Nos. 3 and 4.

b) If the filament is ON, the trouble is probably with the High Voltage Block. Before proceeding on to replace the High Voltage Block, see whether the cathode circuit of the Picture Tube (the Brightness Control Circuit) is all right.

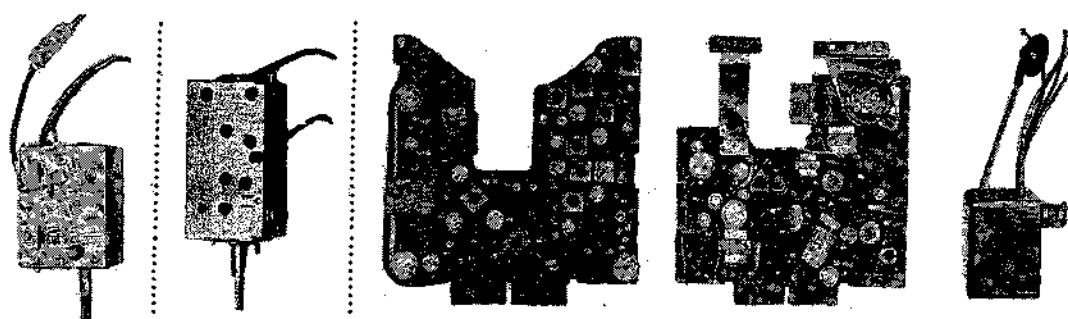

Tuner
For 5-303E

Tuner
For 5-303T


Signal Circuit Board

Deflection Circuit Board

High Voltage

(Fig. 42)

Circuit Diagram for Video Amp. (Fat Figures mean the terminal No. of Multi-Jack)

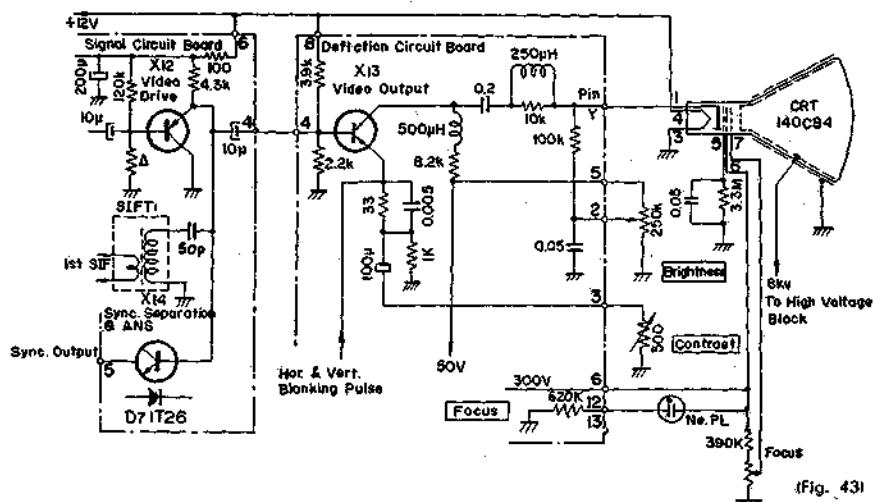

(Fig. 43)

To do this, measure the cathode voltage from the copper-clad side of the Deflection Circuit Board. (Refer to Fig. 43) If this voltage is varied between 0 and 40 to 50 volts by an adjustment of the Brightness Control, the cathode circuit is all right, and the High Voltage Block is to be replaced.

If this voltage is abnormal, the Brightness Control Circuit on the Deflection Circuit Board must be checked.

- c) If the raster still does not appear after replacing the High Voltage Block, the Picture Tube may be defective.

CAUTION

NEVER ATTEMPT TO CHECK THE HIGH VOLTAGE (8 KV) CIRCUIT BY SPARK TEST

The high voltage is often tested by a Spark Test. But, in Transistor TV this is likely to cause damage not only to the Horizontal Deflection Circuits but also to other seemingly not related parts of the set. Especially, the High Voltage spark will adversely affect the transistors on the Signal Circuit Board because of the Pulse AGC circuit employed.

3. Raster appears but is abnormal.

First of all, check the 12 V DC Power Supply.

- 1) Too small Raster

Suspectable Item : ☆ Deflection Circuit Board

Replace the Deflection Circuit Board

2) Raster is dark.

Suspectable Items : Picture Tube
 High Voltage Block

a) When the Raster Size is normal but is not bright enough, the trouble is almost certainly with the Picture Tube.

b) When the Raster spreads out and gets dark while the brightness is meant to be increased, the trouble is with the reduced emission of the High Voltage Rectifier Tube and the High Voltage Block must be replaced.

3) The left side of the Raster is elongated and gets dark.

Suspectable Item : High Voltage Block

This is an indication of broken Damper Diode, and hence the High Voltage Block must be replaced.

Video Output and Synchronization

1. No Picture (Sound is normal)

Suspectable Items : Deflection Circuit Board
 Signal Circuit Board

Since the Video Output Circuit of this set is on the Deflection Circuit Board, check the Video Output Circuit as follows:

Apply AC test voltage taken from the secondary winding of the transformer through a $15\text{ K}\Omega$ Resistor and a $3\mu\text{F}$, 50 WV or more, Electrolytic Capacitor, to the Terminal No. 4 (The input terminal to the Video Output Circuit) of the Deflection Circuit Board as shown in Fig. 44. If the AC hum appears on the Picture Tube, replace the Signal Circuit Board. If not, replace the Deflection Circuit Board.

2. Failure of Synchronization

1) Failure of both Horizontal and Vertical Synchronization

Suspectable Items : Deflection Circuit Board
 Signal Circuit Board

Measure the voltage at Terminal No. 5 of the Signal Circuit Board and decide whether the trouble is with the Signal Circuit Board or with the Deflection Circuit Board. The normal value of the voltage is around 10.5 V. (Fig. 44)

If the voltage is more than 10.5 V, replace the Signal Circuit Board.

If it is abnormally low, replace the Deflection Circuit Board.

2) Failure of either Horizontal or Vertical Synchronization alone

Suspectable Item : Deflection Circuit Board

In this case replace the Deflection Circuit Board.

3. No Picture and No Sound

Suspectable Items : Tuner
 Signal Circuit Board

a) Replace the Signal Circuit Board and see the result.

b) Apply the output from another tuner to the Input Terminal of the Signal Circuit Board as shown in Fig. 45, and see the result. The power to this Tuner is to be taken from the set with a length of cord with clips.

4. Only one or a few Channels are defective

Suspectable Item : ★ Tuner

If the Antenna System and the Fine Tunings are all right, the trouble is with the Tuner. This can be checked by use of another Tuner as mentioned in 3 (b).

5. Other Troubles


Suspectable Items : ★ Tuner

 ★ Signal Circuit Board.


 ★ Deflection Circuit Board

For troubles like low contrast, poor signal-to-noise ratio and poor resolution, replace the Signal Circuit Board first. Then, if the signal-to-noise ratio is still poor, replace the Tuner. If the contrast is low, replace the Deflection Circuit Board.

To Check Video Amp. & Synchronization Circuit

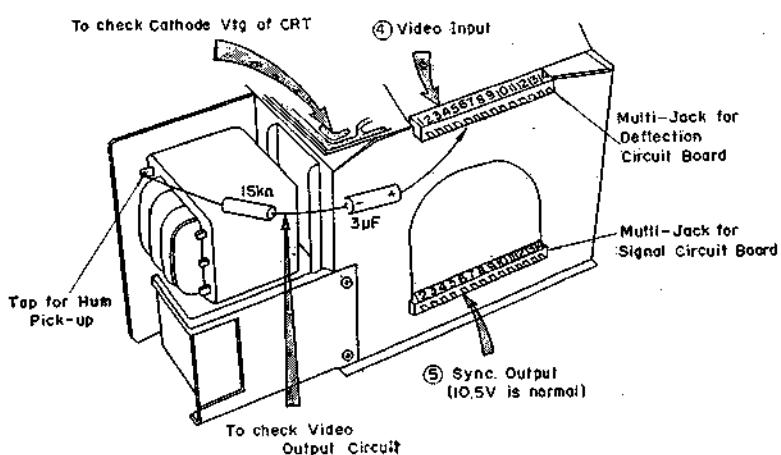

[Fig. 44]

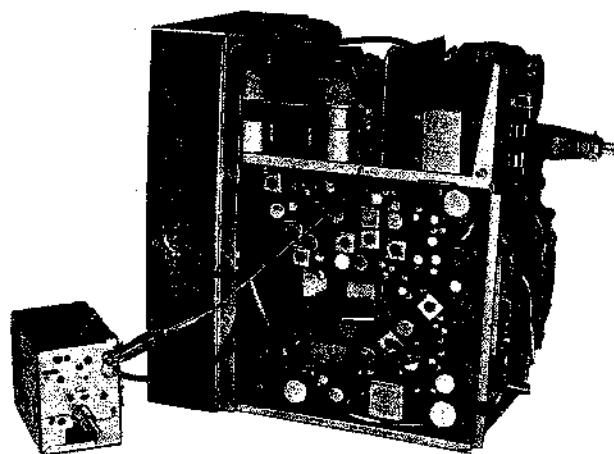

[Fig. 45]

Sound (Picture is normal)

1. No Sound

Suspectable Items :

- ☆ Speaker
- ☆ Signal Circuit Board

Listen with the earphone.

- a) Check the Speaker and the Earphone Jack if sound is heard through the earphone
- b) If still no sound can be heard replace the Signal Circuit Board.

2. Sound is distorted.

Suspectable Items :

- ☆ Speaker
- ☆ Signal Circuit Board

Judge by hearing the sound whether the trouble is with the defective Speaker. If the trouble is not caused by the Speaker, replace the Signal Circuit Board.

3. Buzzing

Suspectable Items :

- ☆ Antenna
- ☆ Fine Tuning
- ☆ SIFT3
- ☆ Signal Circuit Board

- a) If the Buzz appears only on some specific channel, the trouble is not with the set itself. Adjust the Antenna and the Fine Tuning.
- b) If the Buzz appears on all channels, adjust the blue core of SIFT3.
- c) Then, if the Buzz still exists, replace the Signal Circuit Board.

4. Other troubles with Sound

Suspectable Item :


- ☆ Signal Circuit Board

For other troubles with the sound, replace the Signal Circuit Board.

SONY®

SUPPLEMENT TO SERVICING GUIDE

MICRO TV 5-303E

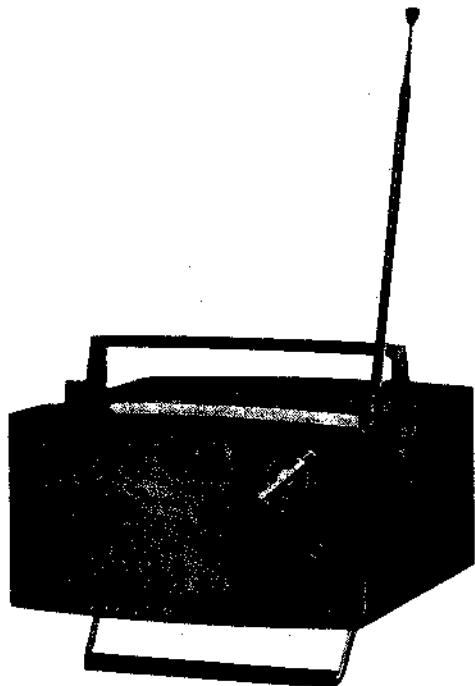


CONTENTS

	Page
Mounting Diagram	2
Signal Block	2
Deflection Block	3
Schematic Diagram	5, 6
Voltage Distribution Chart	
Tuner	4
VIF AMP Circuit	4
Sound Circuit	7
SYNC SPLIT Circuit	7
SYNC SEP, AMP & NOISE LIMIT Circuit	7
VERT Deflection Circuit	8
Video Output Circuit	8
HOR DEF Circuit	9
Electrical Parts List (A).....	10, 11, 12
Electrical Parts List (B)	12, 13
Mechanical Parts List	13, 14


Mounting Diagram

— Signal Block —

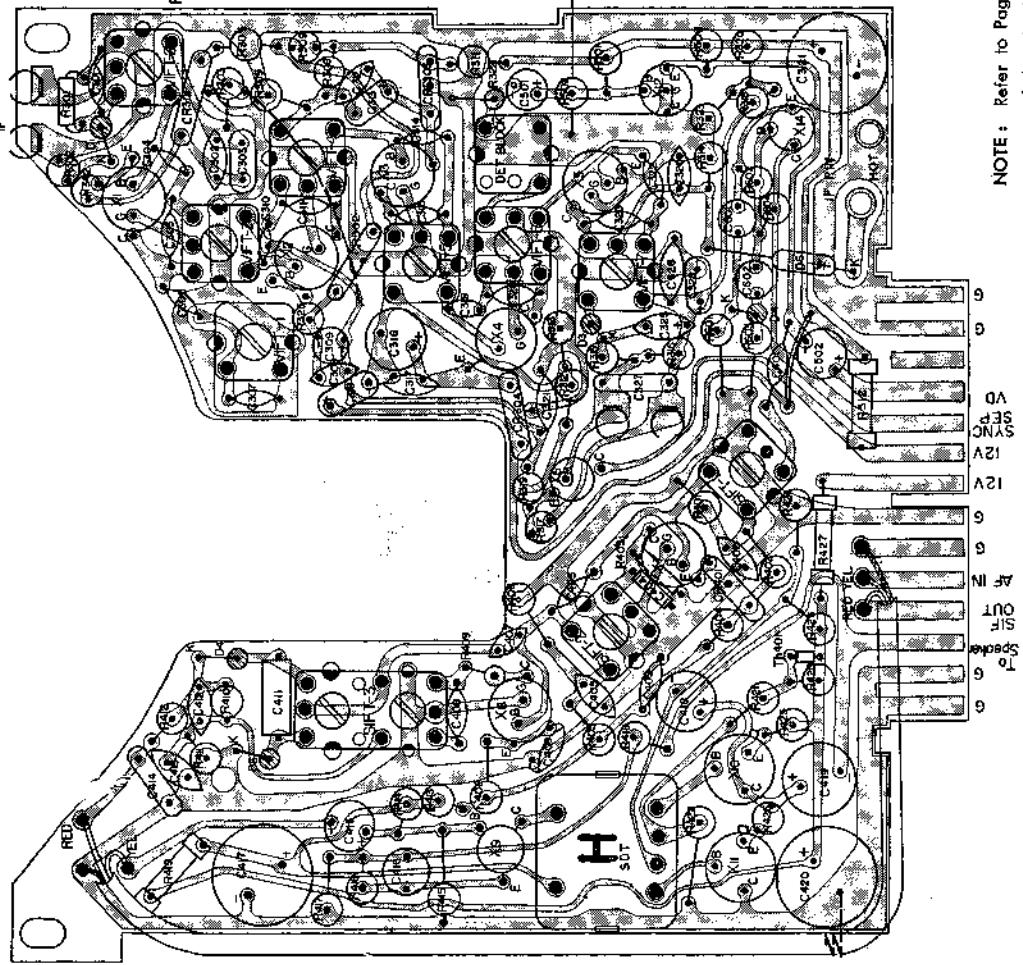

NOTE : Refer to Pages 10 and 11 for value
of the circuit constants.


Mounting Diagram
— Deflection Block —

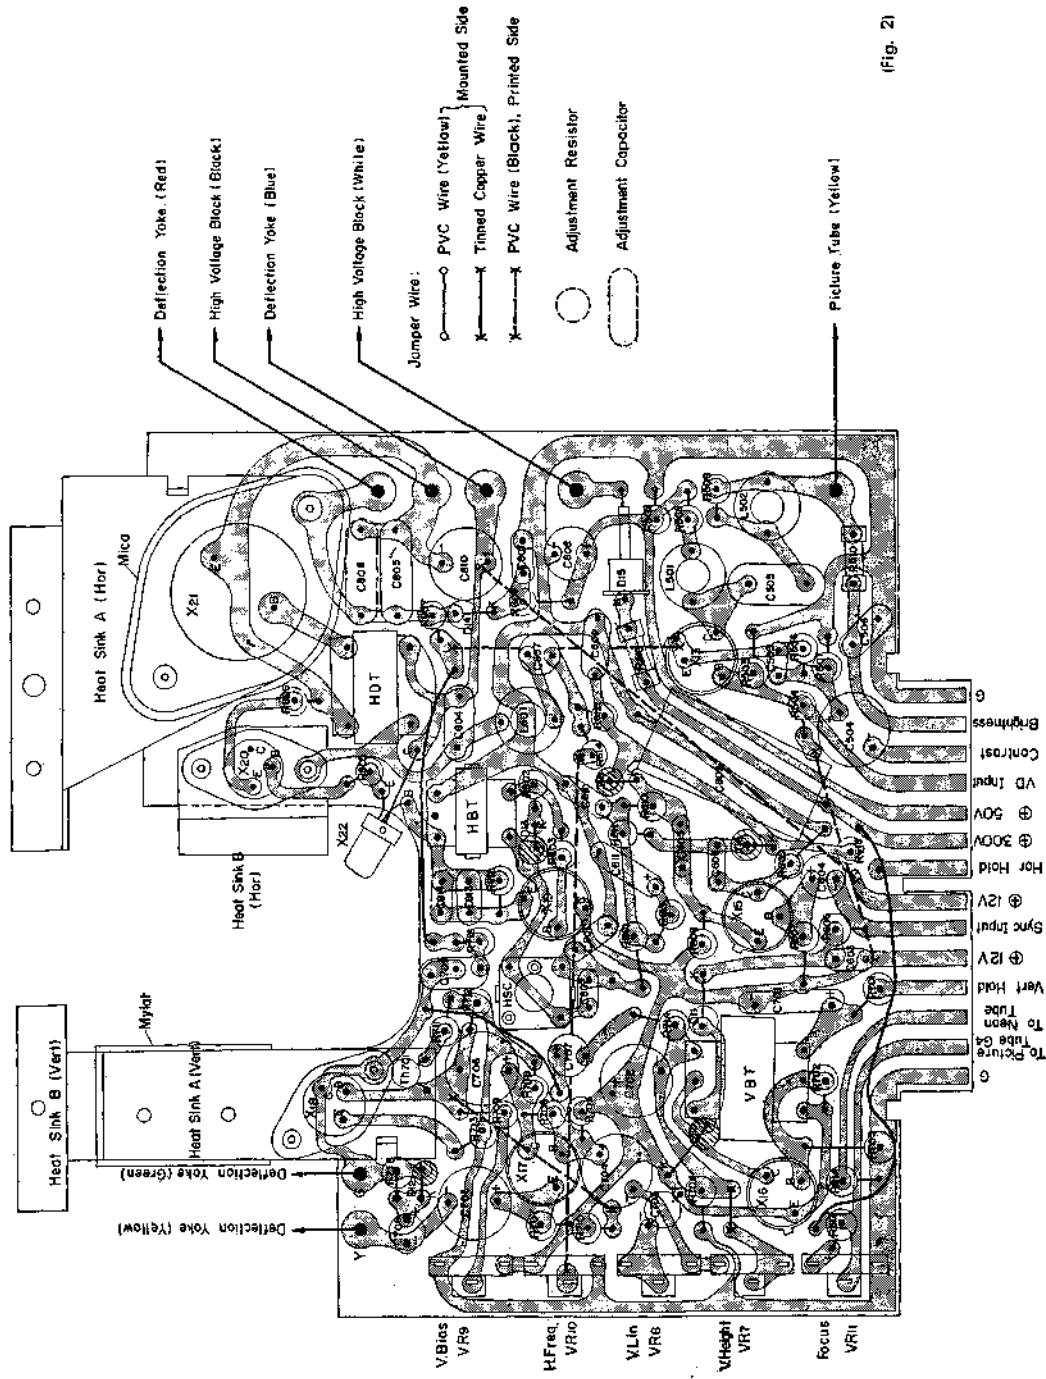

(Fig. 2)

Voltage Distribution Chart


— Tuner —

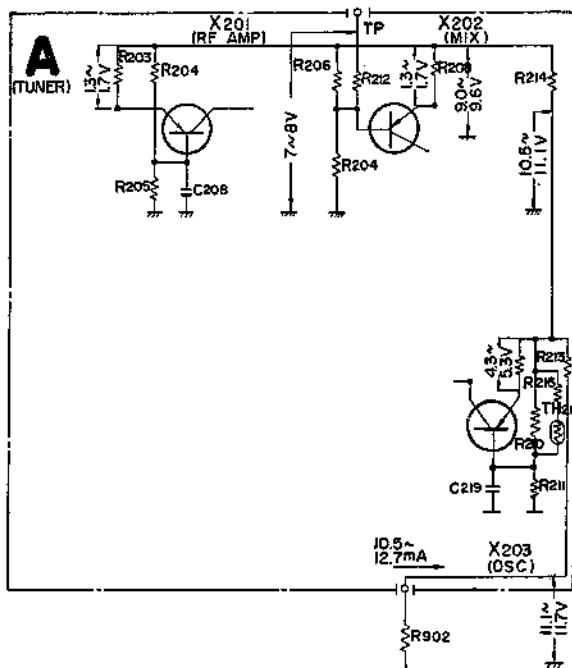

[Fig. 3]


Voltage Distribution Chart

— VIF AMP Circuit —

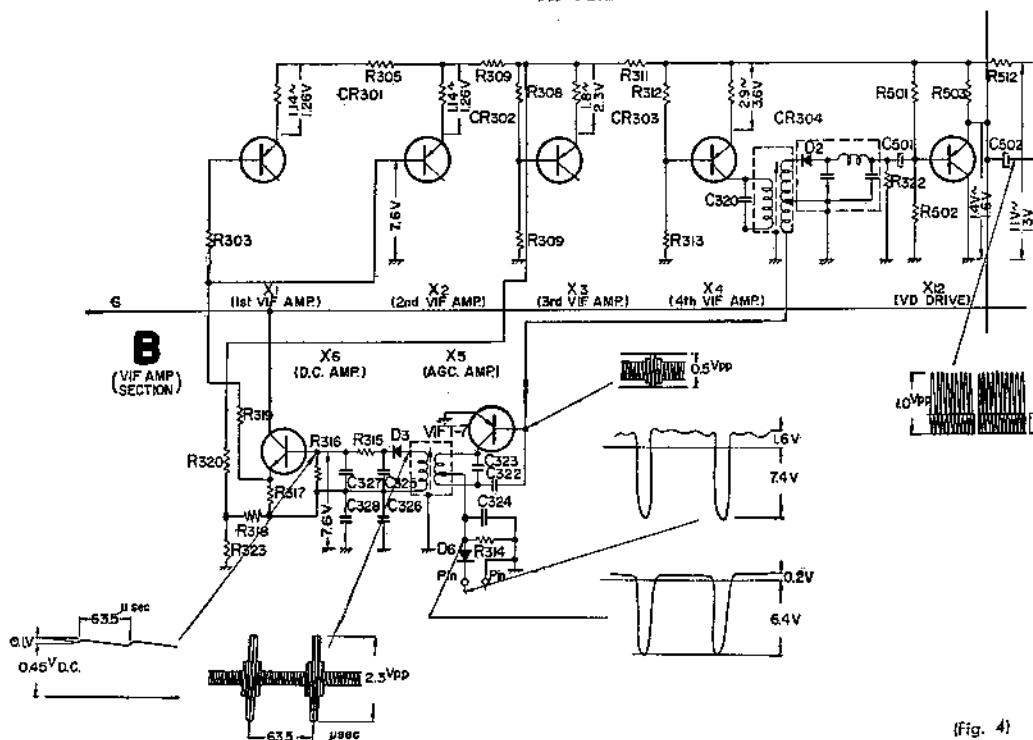

[Fig. 4]

Schematic Diagram for TV 5-303E

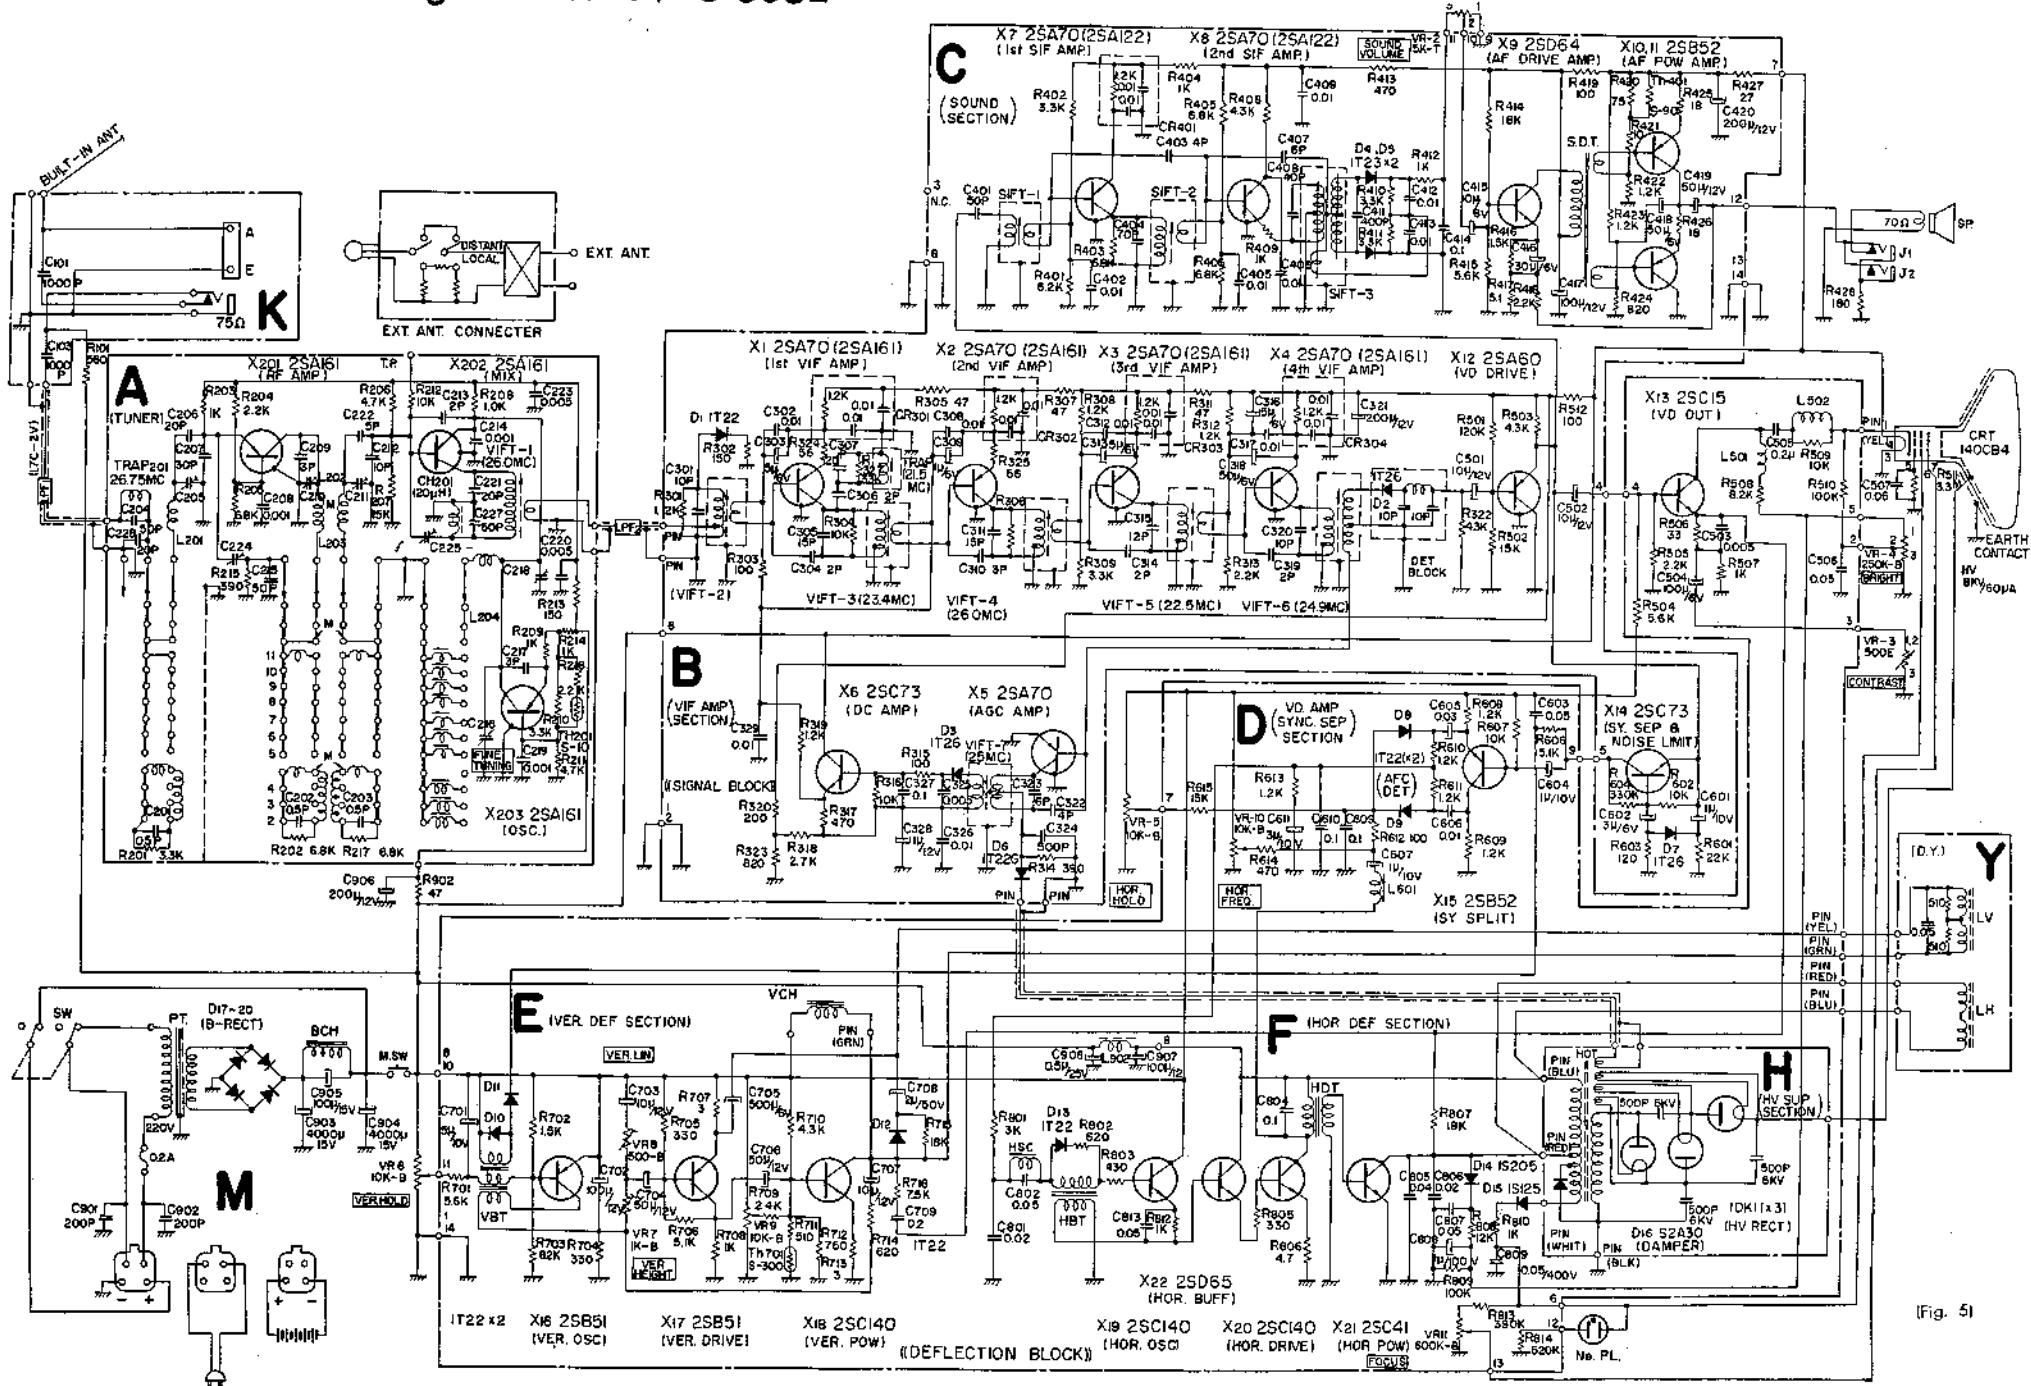

[Fig. 5]


△ To be adjusted and value may differ from that indicated.

* Used in some set for adjustment purpose.

NOTE: Refer to pages 10 and 11 for value of the circuit constants.

Voltage Distribution Chart



— Sound Circuit —

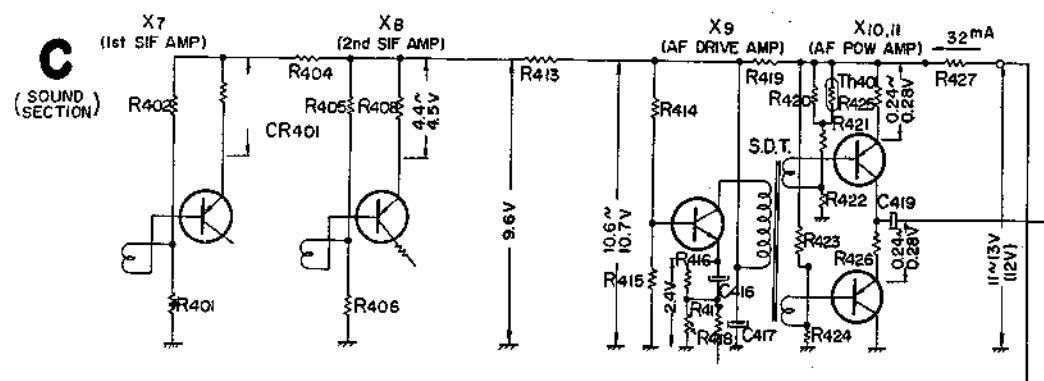


(Fig. 4)

Voltage Distribution Chart

—SYNC SPLIT Circuit—

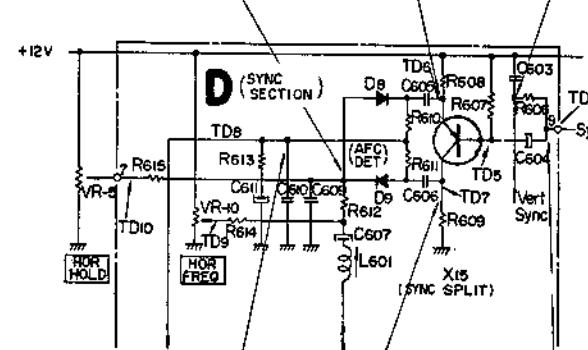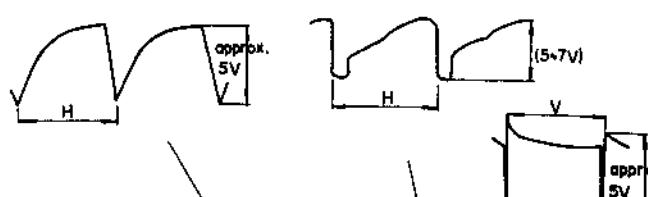

Voltage Distribution Chart




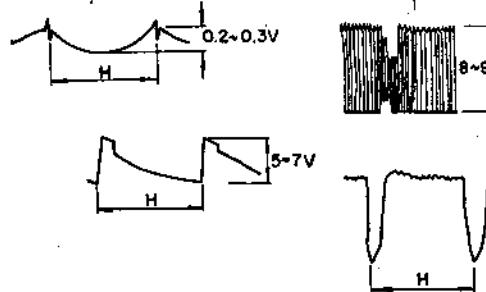


(Fig. 7)


DC Voltage: TD₄...10V, TD₅...11.5V, TD₆...10.5V, TD₇...1.5V
TD₈...5V, TD₉...6.5V, TD₁₀...5.5V

Voltage Distribution Chart

Videlicet Cuiuslibet

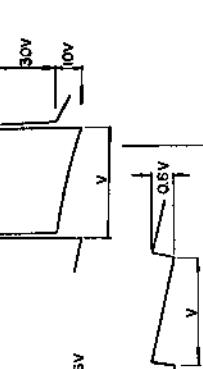

Voltage Distribution Chart — VERT Deflection Circuit —



(Fig. 8)


The diagram shows a detailed circuit schematic for Fig. 10. The circuit is powered by +12V and includes several components such as resistors (R509, R510, R508, R507, R506, R505, R504), capacitors (C507, C506, C505, C504, C503, C502, C501), and transistors (TD1, TD2, TD3). The circuit is connected to a series of pins labeled Pin 1 through Pin 13. A note on the right side of the circuit board indicates 'Fracture TUBE' and 'Earth'.

Fig. 101

Voltage : $T_{E_1} \sim 9V$, $T_{E_2} \sim 16V$, $T_{E_3} \sim 16V$, $T_{E_4} \sim 5.5V$, $T_{E_5} \sim 11.7V$.

- 8

Voltage Distribution Chart
— HOR DEF Circuit —

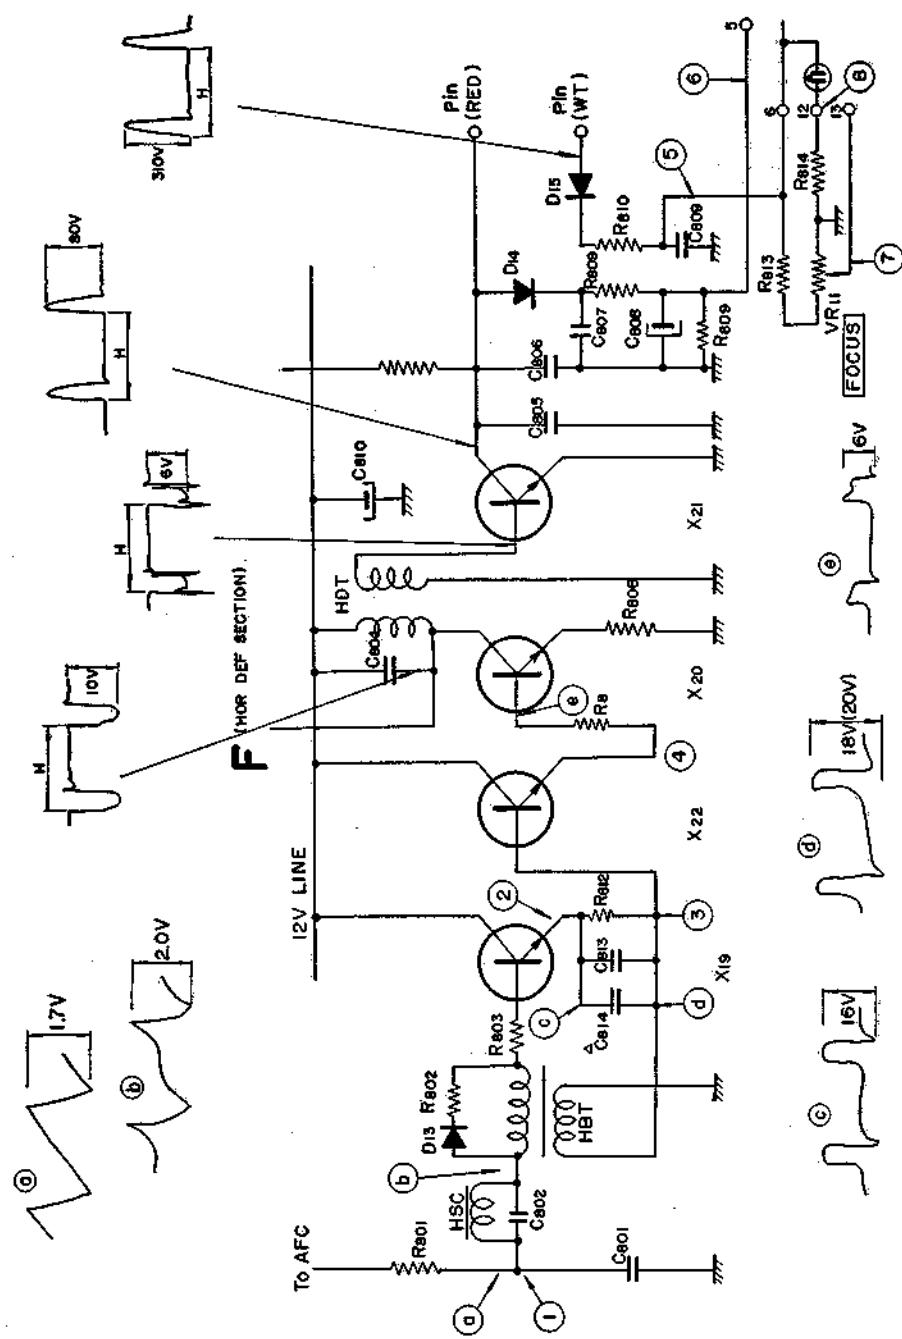

REMARKS FOR THE ELECTRICAL PARTS LIST ON PAGE 10 & 11.

Parts No. of Resistor

- | | |
|--------|----------------------|
| 1—201— | Composition Resistor |
| 1—203— | Carbon Resistor |
| 1—207— | Wire Wound Resistor |

DC Voltage : ①...2.1V, ③...2.7V, ⑥...0.02V, ④...1.7V
⑤...290V, ⑦...50V, ⑧...50~100V, ⑨...230V

[Fig. 11]

Electrical Parts List (A) for TV 5-303E

(Refer to the REMARKS on page 9)

Part No.	Symbol	Description	Part No.	Symbol	Description
1-221-276-11	VR ₂	Potentiometer	1-201-133-00	R ₄₀₉	1 KΩ RC1/8L
-275-11	VR ₃	Volume Control 5 KΩ-T	1-203-373-00	R ₄₁₀	3.3 KΩ RD1/8L
-265-11	VR ₄	Contrast Control 500 Ω-E	-373-00	R ₄₁₁	3.3 KΩ //
-297-11	VR ₅	Brightness Control 250 KΩ-B	-367-00	R ₄₁₂	1 KΩ //
-297-11	VR ₆	Horizontal Hold Control 10 KΩ-B	-361-00	R ₄₁₃	470Ω //
-297-11	VR ₇	Vertical Hold Control 10 KΩ-B	-385-00	R ₄₁₄	18 KΩ //
-335-00	VR ₈	Vertical Height Control 1 KΩ-B	-378-00	R ₄₁₅	5.6 KΩ //
-326-00	VR ₉	Vertical Linearity Control 500 Ω-B	-405-00	R ₄₁₆	1.5 KΩ //
-327-00	VR ₁₀	Vertical Bias Control 10 KΩ-B	-351-00	R ₄₁₇	5.1 Ω //
-327-00	VR ₁₁	Horizontal Frequency Control 10 KΩ-B	-370-00	R ₄₁₈	2.2 KΩ //
1-221-351-00	VR ₁₁	Focus Control 600 KΩ-B	-011-00	R ₄₁₉	100Ω RD1/4L
		Encapsulated Component	-356-00	R ₄₂₀	75Ω RD1/8RL
1-101-406-01	CR ₃₀₁	1.2 KΩ, 0.01 μF, 0.01 μF	-315-00	R ₄₂₁	10Ω //
-406-01	CR ₃₀₂	//	-368-00	R ₄₂₂	1.2 KΩ RD1/8RL
-406-01	CR ₃₀₃	//	-368-00	R ₄₂₃	1.2 KΩ //
-406-01	CR ₃₀₄	//	-366-00	R ₄₂₄	820Ω //
-406-01	CR ₄₀₁	//	-308-00	R ₄₂₅	18Ω //
		Resistor	-006-00	R ₄₂₆	18Ω //
1-201-454-11	R ₁₀₁	560Ω RC1/4L	-334-00	R ₄₂₇	27Ω RD1/4L
1-203-095-00	R ₁₀₂	27 KΩ RD1/4L		R ₄₂₈	180Ω //
1-203-187-00	R ₂₀₁	6.8 KΩ RD1/16L	-400-00	R ₅₀₁	120 KΩ RD1/8RL
-187-00	R ₂₀₂	6.8 KΩ //	-386-00	R ₅₀₂	15 KΩ //
-182-00	R ₂₀₃	1 KΩ //	-375-00	R ₅₀₃	4.3 KΩ //
-184-00	R ₂₀₄	2.2 KΩ //	-377-00	R ₅₀₄	5.1 KΩ //
-187-00	R ₂₀₅	6.8 KΩ RD1/16L	-370-00	R ₅₀₅	2.2 KΩ //
-185-00	R ₂₀₆	4.7 KΩ //	-354-00	R ₅₀₆	33Ω //
-192-00	R ₂₀₇	15 KΩ //	-367-00	R ₅₀₇	1 KΩ //
-182-00	R ₂₀₈	1 KΩ //	-408-00	R ₅₀₈	8.2 KΩ //
-421-00	R ₂₀₉	1 KΩ RD1/16RL	-383-00	R ₅₀₉	10 KΩ //
-425-00	R ₂₁₀	3.3 KΩ RD1/16L	-100-00	R ₅₁₀	100 KΩ RD1/4L
-185-00	R ₂₁₁	4.7 KΩ //	1-201-596-00	R ₅₁₁	3.3 MΩ RC1/2L
-190-00	R ₂₁₂	10 KΩ //	1-203-011-00	R ₅₁₂	100Ω RD1/4RL
1-201-160-00	R ₂₁₃	42Ω RC1/10L	-387-00	R ₆₀₁	22 KΩ RD1/8L
1-203-181-00	R ₂₁₄	390Ω RD1/16L	-383-00	R ₆₀₂	10 KΩ //
-181-00	R ₂₁₅	390Ω //	-759-00	R ₆₀₃	120 KΩ //
-339-00	R ₂₁₆	1.8 KΩ RD1/16L	-411-00	R ₆₀₄	330 KΩ //
-187-00	R ₂₁₇	6.8 KΩ RD1/16L		R ₆₀₅	5.1 KΩ RD1/8RL
-185-00	R ₂₁₈	4.7 KΩ //	1-203-377-00	R ₆₀₆	10 KΩ //
			-383-00	R ₆₀₇	1.2 KΩ //
1-201-457-00	R ₆₀₁	1.2 KΩ RC1/8L	-368-00	R ₆₀₈	1.2 KΩ //
1-203-145-00	R ₆₀₂	150Ω RD1/8RL	-368-00	R ₆₀₉	1.2 KΩ //
-357-00	R ₆₀₃	100Ω //	-368-00	R ₆₁₀	1.2 KΩ //
1-201-123-00	R ₆₀₄	6.8 KΩ RC1/8L	-368-00	R ₆₁₁	1.2 KΩ //
1-203-414-00	R ₆₀₅	47Ω RD1/8RL	-357-00	R ₆₁₂	100Ω //
1-201-108-00	R ₆₀₆	10 KΩ RC1/8L	-368-00	R ₆₁₃	1.2 KΩ RD1/8RL
1-203-414-00	R ₆₀₇	47Ω RD1/8RL	-561-00	R ₆₁₄	470Ω //
-368-00	R ₆₀₈	1.2 KΩ //	-387-00	R ₆₁₅	22 KΩ //
-373-00	R ₆₀₉	3.3 KΩ //	I-385-00	R ₇₀₁	15 KΩ //
	R ₆₁₀		-378-00	R ₇₀₂	5.6 KΩ //
1-203-414-00	R ₆₁₁	47Ω RD1/8RL	-405-00	R ₇₀₃	1.5 KΩ //
-368-00	R ₆₁₂	1.2 KΩ //	-397-00	R ₇₀₄	82 KΩ //
-370-00	R ₆₁₃	2.2 KΩ //	-360-00	R ₇₀₅	330Ω //
-412-00	R ₆₁₄	390Ω //	-360-00	R ₇₀₆	330Ω //
-357-00	R ₆₁₅	100Ω //	-377-00	R ₇₀₇	5.1 KΩ //
-383-00	R ₆₁₆	10 KΩ //	1-207-018-00	R ₇₀₈	3Ω RW1/4RL
-361-00	R ₆₁₇	470Ω RD1/8RL	1-203-367-00	R ₇₀₉	1 KΩ RD1/8RL
-372-00	R ₆₁₈	2.7 KΩ //	-778-00	R ₇₁₀	2.4 KΩ //
-368-00	R ₆₁₉	1.2 KΩ //	-375-00	R ₇₁₁	4.3 KΩ //
-404-00	R ₆₂₀	200Ω //	-316-00	R ₇₁₂	510Ω //
	R ₆₂₁		-335-00	R ₇₁₃	750Ω //
1-201-122-00	R ₆₂₂	4.3 KΩ RC1/8L	1-207-018-00	R ₇₁₄	3Ω RW1/4RL
1-203-366-00	R ₆₂₃	820Ω RD1/8RL	1-203-857-00	R ₇₁₅	620Ω RD1/8RL
1-201-128-00	R ₆₂₄	33Ω RC1/8L	1-201-147-00	R ₇₁₆	18 KΩ RC1/8L
-128-00	R ₆₂₅	33Ω //	1-203-382-00	R ₇₁₇	7.5 KΩ RD1/8RL
-128-00	R ₆₂₆	33Ω //			
1-203-884-00	R ₆₂₇	33 KΩ RD1/16L	-443-00	R ₈₀₁	3 KΩ RD1/8RL
-380-00	R ₆₂₈	6.2 KΩ RD1/8RL	-857-00	R ₈₀₂	620Ω //
-373-00	R ₆₂₉	3.3 KΩ //	-760-00	R ₈₀₃	430Ω //
1-201-123-00	R ₆₃₀	6.8 KΩ RC1/8L		R ₈₀₄	330Ω RD1/8RL
1-203-367-00	R ₆₃₁	1 KΩ RD1/8RL	1-203-360-00	R ₈₀₅	330Ω RD1/8RL
-381-00	R ₆₃₂	6.8 KΩ //	1-207-022-00	R ₈₀₆	5.6 Ω RW1/4RL
-381-00	R ₆₃₃	6.8 KΩ //	1-203-386-00	R ₈₀₇	18 KΩ RD1/8RL
	R ₆₃₄		-384-00	R ₈₀₈	12 KΩ //
1-203-375-00	R ₆₃₅	4.3 KΩ RD1/8RL	-399-00	R ₈₀₉	100 KΩ //

—continued—

Part No.	Symbol	Description	Part No.	Symbol	Description
1-203-031-00	R ₈₁₀	1 KΩ RD1/4L	1-101-004-01	C ₄₀₅	0.01 μF Ceramic
	R ₈₁₁		-004-01	C ₄₀₆	0.01 μF //
1-203-367-00	R ₈₁₂	1 KΩ RD1/8RL	-085-01	C ₄₀₇	6 PF //
-867-00	R ₈₁₃	390 KΩ //	-129-01	C ₄₀₈	40 PF //
-868-00	R ₈₁₄	620 KΩ //	-004-01	C ₄₀₉	0.01 μF //
1-201-455-11	R ₉₀₁	1.5 MΩ RC1/2L		C ₄₁₀	—deleted—
1-203-148-00	R ₉₀₂	47Ω RD1/4L	1-103-023-11	C ₄₁₁	400 PF Styrol
1-201-455-11	R ₉₀₃	1.5 MΩ RC1/2L	1-101-118-01	C ₄₁₂	0.01 μF Ceramic
		Capacitor	-118-01	C ₄₁₃	0.01 μF //
1-101-001-01	C ₁₀₁	0.001 μF Ceramic	1-121-104-01	C ₄₁₄	0.1 μF //
	C ₁₀₂	—deleted—	-102-01	C ₄₁₅	10 μF 6 WV Electrolytic
1-101-001-01	C ₁₀₃	0.001 μF Ceramic	-120-01	C ₄₁₆	30 μF //
		—deleted—	-128-01	C ₄₁₇	100 μF 12 WV //
I-101-076-00	C ₂₀₁	0.5 PF Ceramic	-122-01	C ₄₁₈	50 μF 6 WV //
-076-00	C ₂₀₂	0.5 PF //	-121-01	C ₄₁₉	50 μF 12 WV //
-041-00	C ₂₀₃	50 PF //	1-121-118-01	C ₅₀₁	200 μF 12 WV //
I-141-055-00	C ₂₀₄	Cylindrical Trimmer Capacitor	-118-01	C ₅₀₂	10 μF 12WV
-055-00	C ₂₁₀	" "	1-105-033-00	C ₅₀₃	10 μF //
-055-00	C ₂₁₁	" "	1-121-155-01	C ₅₀₄	0.005 μF Mylar (IMFL)
-055-00	C ₂₁₈	" "	1-105-077-00	C ₅₀₅	100 μF 6 WV Electrolytic
-055-00	C ₂₂₄	" "	-035-00	C ₅₀₆	0.2 μF Mylar (IMFL)
-055-00	C ₂₂₅	" "	-036-00	C ₅₀₇	0.05 μF //
I-101-039-00	C ₂₀₈	10 PF Ceramic	1-127-906-00	C ₆₀₁	0.05 μF //
-040-00	C ₂₀₇	20 PF //	-907-00	C ₆₀₂	10 μF 10 WV Electrolytic (Alox)
-043-00	C ₂₀₈	0.001 μF //	1-105-035-00	C ₆₀₃	3 μF 6 WV //
-036-00	C ₂₀₉	8 PF //	1-127-906-00	C ₆₀₄	0.05 μF Mylar (IMFL)
-039-00	C ₂₁₂	10 PF //	1-105-018-00	C ₆₀₅	1 μF 10 WV Electrolytic (Alox)
-035-00	C ₂₁₃	2 PF //	-063-00	C ₆₀₆	0.03 μF Mylar (IMFL)
-043-00	C ₂₁₄	0.001 μF //	1-127-906-00	C ₆₀₇	0.01 μF //
-041-00	C ₂₁₅	50 PF //	1-105-076-00	C ₆₀₈	1 μF 10 WV Electrolytic (Alox)
I-141-054-00	C ₂₁₆	Cylindrical Trimmer Capacitor (Fine Tuning)	-076-00	C ₆₀₉	—deleted—
1-101-067-00	C ₂₁₇	3 PF Ceramic	1-127-908-00	C ₆₁₀	0.1 μF Mylar (IMFL)
-043-00	C ₂₁₉	0.001 μF //		C ₆₁₁	0.1 μF //
-044-00	C ₂₂₀	0.005 μF //			3 μF 10 WV Electrolytic (Alox)
-040-00	C ₂₂₁	20 PF //	1-127-905-01	C ₇₀₂	5 μF 10 WV Electrolytic (Alox)
-038-00	C ₂₂₂	5 PF //	1-121-141-05	C ₇₀₃	100 μF 12 WV Electrolytic
-020-00	C ₂₂₃	0.005 μF //	-118-01	C ₇₀₄	10 μF //
	C ₂₂₆	—deleted—	-122-00	C ₇₀₅	50 μF //
I-101-041-00	C ₂₂₇	50 PF Ceramic	-161-05	C ₇₀₆	500 μF 6 WV //
			-122-00	C ₇₀₇	50 μF 12 WV //
			-164-00	C ₇₀₈	10 μF //
			-136-00	C ₇₀₉	2 μF 50 WV //
I-121-105-01	C ₃₀₁	10 PF Ceramic	1-105-037-00	C ₇₀₉	0.2 μF Mylar (IMFL)
I-101-046-01	C ₃₀₂	0.01 μF //			
	C ₃₀₈	5 μF 6 WV Electrolytic			
I-101-046-01	C ₃₀₄	2 PF Ceramic			
-114-01	C ₃₀₅	15 PF //	1-105-034-00	C ₈₀₁	0.02 μF Mylar (IMFL)
-046-01	C ₃₀₆	2 PF //	-035-00	C ₈₀₂	0.05 μF //
-111-00	C ₃₀₇	20 PF //			—deleted—
-004-01	C ₃₀₈	0.01 μF //	1-105-076-00	C ₈₀₃	0.1 μF Mylar (IMFL)
I-121-145-01	C ₃₀₉	1 μF 6 WV Electrolytic	1-113-112-00	C ₈₀₄	0.04 μF PS
I-101-036-01	C ₃₁₀	3 PF Ceramic	-107-00	C ₈₀₅	0.02 μF //
-114-00	C ₃₁₁	15 PF //	1-105-035-00	C ₈₀₆	0.05 μF Mylar (IMFL)
-004-01	C ₃₁₂	0.01 μF //	1-121-148-01	C ₈₀₇	1 μF 100 WV Electrolytic
I-121-106-01	C ₃₁₃	5 μF 6 WV Electrolytic	1-115-046-00	C ₈₀₈	0.05 μF 400 WV Oil
I-101-046-01	C ₃₁₄	2 PF Ceramic			—deleted —
-649-01	C ₃₁₅	12 PF //			—deleted —
I-121-106-01	C ₃₁₆	5 μF 6 WV Electrolytic			—deleted —
I-101-004-01	C ₃₁₇	0.01 μF Ceramic	1-105-035-00	C ₈₁₃	0.05 μF Mylar (IMFL)
I-121-128-01	C ₃₁₈	50 μF 6 WV Electrolytic	-063-00	C ₈₁₄	0.01 μF //
I-101-046-01	C ₃₁₉	2 PF Ceramic	1-109-010-00	C ₈₀₁	200 PF Mica
-645-00	C ₃₂₀	10 PF //	-010-00	C ₈₀₂	200 PF //
I-121-121-01	C ₃₂₁	200 μF 12 WV Electrolytic	1-119-071-05	C ₈₀₃	4000 μF 1.5 WV Electrolytic
I-101-069-01	C ₃₂₂	4 PF Ceramic	-071-05	C ₈₀₄	4000 μF //
I-103-096-00	C ₃₂₃	6 PF Styrol	-101-05	C ₈₀₅	100 μF 12 WV //
I-101-424-00	C ₃₂₄	500 PF Ceramic	1-119-043-05	C ₈₀₆	200 μF //
-058-01	C ₃₂₅	0.005 μF //	1-131-002-11	C ₈₀₇	50 μF //
-004-01	C ₃₂₆	0.01 μF //		C ₈₀₈	(Tantalum) //
-086-01	C ₃₂₇	0.1 μF //			0.5 μF 25 WV //
I-121-116-01	C ₃₂₈	1 μF 12 WV Electrolytic			Transistor
I-101-004-01	C ₃₂₉	0.01 μF Ceramic		X ₂₀₁	2SA161 IRF AMP
				X ₂₀₂	2SA161 MIX
				X ₂₀₃	2SA161 OSC
-112-01	C ₄₀₁	50 PF Ceramic		X ₁	2SA70 (1st VIF AMP)
-004-01	C ₄₀₂	0.01 μF //		X ₂	2SA70 (2nd VIF AMP)
-069-01	C ₄₀₃	4 PF //		X ₃	2SA70 (3rd VIF AMP)
-319-01	C ₄₀₄	0 PF //		X ₄	2SA70 (4th VIF AMP)

—continued—

Part No.	Symbol	Description	Part No.	Symbol	Description
X ₅		2SA70 (AGC AMP)	1-800-001-00	Th ₂₀₁	Thermistor
X ₆		2SC73 (DC AMP)	8-860-003-00	Th ₄₀₁	S-10
X ₇		2SA70 (1st SIF AMP)	-005-00	Th ₇₀₁	S-90
X ₈		2SA70 (2nd SIF AMP)			S-300
X ₉		2SD64 (AF DRIVE AMP)			HV Rectifier
X ₁₀		2SB52 (AF POWER AMP)	1-525-039-00		IDK1
X ₁₁		2SB52 (")	1-403-401-00	VIFT ₁	Coil and Transformers
X ₁₂		2SA60 (VD DRIVE)	-426-11	VIFT ₂	Video IF Transformer
X ₁₃		2SC15 (VD OUT)	-424-02	VIFT ₃	"
X ₁₄		2SC73 (SYNC SEP. AMP, NOISE LIMIT)	-425-02	VIFT ₄	"
X ₁₅		2SB52 (SYNC SPLIT)	-417-02	VIFT ₅	"
X ₁₆		2SB51 (VERT OSC)	-418-02	VIFT ₆	"
X ₁₇		2SB51 (VERT DRIVE)	-419-02	VIFT ₇	"
X ₁₈		2SC140 (VERT POWER)	-306-02	SIFT ₁	Sound IF Transformer
X ₁₉		2SC140 (HOR OSC)	-310-02	SIFT ₂	"
X ₂₀		2SC140 (HOR DRIVE)	-048-02	SIFT ₃	IF Transformer for FM Detector
X ₂₁		2SC41 (HOR POWER)	X-44012-54-0	I ₂₀₁ -204	Tuner Rotary Coil
X ₂₂		2SD65 (HOR BUFFER)	1-409-001-00	Trap ₂₀₁	Video IF Trap Coil
Diode			1-407-001-00	CH ₂₀₁	IF Choke Coil
D ₁		1T22	-013-02	Trap ₁	Sound Signal Trap
D ₂		1T26	1-403-420-00	DET	Video Detector Block
D ₃		1T26		BLOCK	Sound Driver Transformer
D ₄		1T23A	1-423-048-00	SOT	Peaking Coil
D ₅		1T23A	1-411-003-11	I ₅₀₁	Peaking Coil
D ₆		1T22	-002-11	I ₅₀₂	Peaking Coil
D ₇		1T26	-003-11	I ₆₀₁	Peaking Coil
D ₈		1T22	1-421-013-11	I ₆₀₂	Horizontal Choke Coil
D ₉		1T22	1-435-005-00	VBT	Vertical Blocking Transformer
D ₁₀		1T22	1-421-106-01	VCH	Vertical Output Choke Coil
D ₁₁		1T22	1-413-004-00	HSC	Stabilizing Coil for Horizontal Sweep
D ₁₂		1T22	1-435-007-12	HBT	Horizontal Blocking Transformer
D ₁₃		1T22	1-437-002-00	HDT	Horizontal Driver Transformer
D ₁₄		IS205	1-439-003-01	HOT	Horizontal Output Transformer
D ₁₅		IS125	1-421-008-13	BCH	Filter Choke Coil for Power Supply
D ₁₆		S2A30	1-441-063-11	PT	Power Transformer
1-531-103-02		Selenium Rectifier			

Electrical Parts List (B) for TV 5-303E

Part No.	Description	Q'ty	Part No.	Description	Q'ty
A. General					
1-507-047-00	Cabinet & Appearance Items		4-002-710-00	Terminal Strip for Yoke	(3)
-065-00	Twin Earphone Jack	1	1-535-009-00	Connector Tip D	(2)
	Antenna Jack Assembly	1	7-621-255-22	Screw \oplus RK 2x4	(1)
1-502-068-00	Main Block	1	1-105-035-00	Mylar Capacitor 0.05 μ F 100 WV	(1)
1-526-052-03	Speaker	1	1-203-316-00	Carbon Resistor RD1/8RL 510 Ω	(2)
-02	Socket for Picture Tube	1	1-453-001-00	High Voltage Block	
1-507-203-00	Multi-Jack for Printed Circuit Board	2	4-002-698-00	High Voltage Block Assembly, including	1
1-532-031-11	Fuse (0.2A)	1	-699-00	High Voltage Block Case	(1)
1-519-007-01	Neon Lamp	1	-700-00	High Voltage Block Shield Plate	(1)
-02		1	-701-00	High Voltage Rectifier Mounting Plate	(1)
1-513-176-00	Power Switch	1	-702-00	High Voltage Block Holding Bracket	(1)
1-506-020-00	4 Pole Plug, including	1	1-526-102-01	High Voltage Block Shield Case	(1)
1-533-009-00	Fuse Holder	(2)	4-002-711-02	Anode Connector	(1)
1-514-081-11	Micro-Switch	1	-712-03	Anode Connector Cover	(1)
4-002-713-01	Flat Leaf Actuator for Micro-Switch	1	1-439-003-00	Anode Connector	(1)
1-536-039-00	Two Lug Tie Point for Pilot Lamp Lead	1	1-525-039-00	Horizontal Output Transformer	(1)
1-531-103-01	Selenium Rectifier	1	1-535-009-00	High Voltage Rectifier Tube, 1DK1	(3)
-02		1	1-101-034-00	Connector Tip D	(4)
-03		1	7-622-105-01	Diode S2A30	(1)
1-536-045-11	2P Lug	1	X-40029-62-1	Ceramic Capacitor 500 PF 6 KV	(3)
	Accessory		1-506-108-00	Nut 2 ϕ	(2)
1-504-010-02	Earphone	1	1-538-111-01	High Voltage Block Case Fix Screw	(2)
1-534-041-00	AC Power Cord	1	X-40029-61-1	Deflection Block	
X-40029-06-1	Spare Fuse Assembly	1	1-506-108-00	Mounted Deflection Circuit Board	1
1-534-042-03	Extension Cord	1	1-538-111-01	Circuit Connecting Pin	7
	Deflection Yoke		1-507-103-00	Deflection Circuit Board	1
1-451-003-00	Deflection Yoke Assembly, including	1	X-40029-61-1	Video & Sound Signal Block	
4-002-703-00	Yoke Cover	(1)	1-538-110-02	Mounted Video & Sound Signal Circuit	
-704-00	Yoke Core Clamp	(1)	1-506-108-00	Board	1
-705-00	Centering Magnet Assembly (A)	(1)	1-507-103-00	Video & Sound Signal Circuit Board	1
-706-00	" " " (B)	(1)		Circuit Connecting Pin	2
-707-00	Centering Magnet Holding Bracket	(1)		Connector Tip K	4
-708-00	Yoke Clamp	(1)	73110510	B. Tube	
-709-00	Spacer for Centering Magnet	(1)	1-525-039-00	Picture Tube 140CB4	1
				High Voltage Rectifier Tube, 1DK1	3

—continued—

Part No.	Description			Q'ty	Part No.	Description			Q'ty
	C. Wires and Miscellaneous (Minimum Q'ty for Ordering: Meter)					Two Conductor Cable (Shielded) 7/0.12X2			
	Main Block:					Tinned Copper Wire 0.6φ			
	P. V. C. Wires					1.0φ			
	12/0.18	1.5φ	Red			Braided Wire 16/14/0.08			
	"	"	Orange			High Voltage Block & Deflection Block			
	"	"	Yellow			P. V. C. Wires			
	"	"	Green			0.6φ Yellow			
	"	"	Blue			16/0.12 Black			
	"	"	Gray			20/0.18 Black			
	"	"	White			12/0.18 (Polyethylene)			
	"	"	Purple			Thermo Contracting Plastic Tube			
	"	"	Black			Gray			
	"	"	Brown			Video & Sound Signal Block			
	20/0.18	2.0φ	Black			P. V. C. Wire			
	"	"	Brown			16/0.12 1.6φ Black			
	"	"	Red			Two Conductor Cable 7/0.12X2			
	"	"	Gray						
	"	"	White						

Part No.	Description	Q'ty	Part No.	Description	Q'ty
Y-40012-55-1	Tuner Block	1	X-40029-62-1	Deflection Block (Mounted Circuit Board)	1
X-40029-61-1	Video & Sound Signal Block (Mounted Circuit Board)	1	1-453-001-01	High Voltage Block	1
			1-451-003-00	Deflection Yoke	1

Mechanical Parts List for TV. 5-303E

Part No.	Description	Q'ty	Part No.	Description	Q'ty
	A. General		X-40026-04-8	Cabinet (Back) Assembly	1
	Cabinet & Appearance Items		4-002-795-03	Case Label	1
X-40026-02-0	Cabinet (Front) Assembly, including	1	-714-00	Telescopic Antenna Catch	1
4-002-603-02	Cabinet (Front)	(1)	X-40026-05-0	Carrying Handle Assembly, including	1
-604-01	Picture Tube Mask	(1)	4-002-620-01	Carrying Handle	(1)
-765-01	Picture Tube Protector	1	-622-00	Ornamental Leather for Handle	(2)
-611-00	Antenna Bushing	1	-733-00	Carrying Handle Holding Screw	(2)
-781-00	Dust-Proof Rubber	1	X-40026-06-2	Table Stand Assembly	1
-782-00	Spacer (Upper) for Picture Tube	1	-730-00	Rubber Foot	2
-783-00	Spacer (Lower) for Picture Tube	1	X-40026-43-0	Channel Selector Knob Assembly	1
-784-00	Deflection Yoke Spacer	1	X-40026-10-2	Fine Tuning Knob Assembly	1
X-40026-50-0	Picture Tube Clamp Assembly, including	1	X-40026-11-0	Volume Control Knob Assembly	1
4-002-778-00	Picture Tube Clamp	(1)	4-002-635-00	Control Knob (Hor. Hold. Brightness, Contrast)	3
-779-00	Picture Tube Fixing Bracket	(2)	-762-00	Vertical Hold Control Knob	1
-780-00	Grounding Metal for Picture Tube	(1)	-742-00	"SONY" Badge	1
X-40026-41-1	Telescopic Antenna Assembly, including	1	-761-00	Control Panel	1
4-002-716-00	Telescopic Antenna Holding Bracket	(1)		Main Block	
-718-00	Telescopic Antenna Connecting Lug	(1)	X-40026-14-4	Chassis Assembly	1
-715-00	Compressed Fiber Washer for Telescopic Antenna	(1)	X-40026-15-4	Speaker Holding Plate Assembly, including	1
-717-00	Telescopic Antenna Bottom Insulator	(1)	4-002-644-04	Speaker Holding Plate	(1)
-727-00	Telescopic Antenna Holding Nut	(1)	-646-01	Earphone Jack Plate	(1)
-728-00	Lock Nut for Telescopic Antenna	(1)	-647-00	Multi-Jack Holding Bracket	(2)
7-623-412-01	Lock Washer (5φ) for Telescopic Antenna	(1)	-648-01	Adjustable Clamp for Electrolytic Capacitor	(1)
4-002-764-00	Antenna	(1)	X-40026-16-2	4 Pole Plug Mounting Bracket Assembly	1
	Telescopic Antenna Tip	(1)	4-002-653-01	Micro-Switch Contacting Pin	1

—continued—

Part No.	Description	Q'ty	Part No.	Description	Q'ty
4-002-674-00 -649-00	Micro-Switch Mounting Plate Neon Lamp Holder	1 1	7-623-210-22	Spring Washer 4φ (for Carrying Handle)	2
X-40026-66-0	Video & Sound Signal Block Shield Plate Assembly	1	7-622-307-02	Nut 2.6φ (for Table Stand)	2
X-40026-01-0	Deflection Block			Main Block	
X-40026-01-0	Deflection Circuit Board Assembly, including	1	7-621-561-42	Screw	
4-002-680-01 -681-01	Heat Sink for Hor. Power Transistor (A)	1 (1)	-32 -259-62	(+IK) 3φ×6 (for Power Transformer) (+IK) 3φ×5 (for 4 Pole Plug)	1 3
-682-02	Heat Sink for Hor. Power Transistor (B)	(1)	-261-32	(+IP) 2.6φ×10 (for Earphone) (+IP) 3φ×5 (for Multi-Jack, 4 Pole	2
-683-00	Heat Sink for Vert. Power Transistor (A)	(1)		Plug, Speaker, High Voltage Block, Power Switch)	14
-684-00	Insulator for Heat Sink (Vert.)	(1)	-42	(+IP) 3φ×6 (for Power Transformer)	1
-685-00	Spacer for Heat Sink	(2)	-12	(+IP) 3φ×3 (for Neon Lamp Holder)	1
-686-01	Block Sheet on Deflection Circuit Board	(1)	-22	(+IP) 3φ×4 (Adjustable Clamp for Electrolytic Capacitor)	2
	Accessory		-62	(+IP) 3φ×10 (for Adjustable Clamp for Electrolytic Capacitor)	1
X-44900-01-0	Polyethylene Bag for Silicone Cloth	1	-111-42	(-R) 3φ×6 (for Tuner)	2
4-002-766-00 -775-00	Carrying Bag Carton for Carrying Bag	1 1	-361-32	(-F) 3φ×5 (for Chassis Mask)	1
-771-00	Foam Cushion for Carrying Bag	1	4-002-737-00	(+P) 3φ×23 (for Selenium Rectifier)	1
-772-00	Styro-Foam Cushion (Back)	1		Lock Washer	
-773-00	" " (Bottom)	1	7-623-408-01	3φ (for Selenium Rectifier & Tuner)	7
-774-00	" " (Front)	1		Spring Washer	
-769-00	Polyethylene Bag	1	7-623-207-12	2.6φ (for Earphone)	2
-770-00	Polyethylene Bag for Carrying Bag	1		Washer	
-667-00	Accessory Case	1	4-002-785-00	3φ (for Video & Sound Sig- nal Circuit Board)	1
4-495-008-53	Instruction Manual	1		Nut	
4-002-796-50	Caution Card	1	7-622-107-02	2.6φ (for Earphone)	2
	B. Screws & Washers			Deflection Block	
	(Minimum Q'ty for Ordering: 100 pcs.)			Screws	
	Cabinet & Appearance Items		7-621-261-52	(+IP) 3φ×8 (for Transistor)	2
	Screws		-255-52	(+IP) 2φ×8 (for Transistor)	4
7-621-559-48	(+IK) 2.6φ×6 (for Antenna Clamper)	1	-42	(+IP) 2φ×6 (for Heat Sink)	2
-561-32	(+IK) 3φ×5 (for Antenna Bushing)	5	-555-32	(+IK) 2φ×5 (for Deflection Circuit Board)	3
-555-26	(+IK) 2φ×4 (for Table Stand)	2		Lock Washer	
-36	(+IK) 2φ×5 (for Picture Tube Clamp)	4	7-623-408-01	3φ (for Transistor)	2
-561-52	(+IK) 3φ×8 (for Table Stand)	2		Nuts	
-555-22	(+IK) 2φ×4 (for Telescopic Antenna Holding Bracket)	2	7-622-108-02	3φ (for Transistor)	2
-561-23	(+IK) 3φ×4 (for Control Panel)	1	-105-02	2φ (for Transistor)	4
				Video & Sound Signal Block	
	Screws			Screws	
-555-38	(+IK) 2φ×5 (for Cabinet Back)	1	7-621-261-52	(+IP) 3φ×8 (for Video & Sound Sig- nal Circuit Board)	1
-261-36	(+IP) 3φ×5 (for Table Stand, Cabinet (Back))	4		(+IP) 3φ×5 (for Video & Sound Sig- nal Circuit Board)	1
-259-38	(+IP) 2.6φ×5 (for Table Stand, Cabinet (Back))	7			
-262-22	(+IP) 3φ×20 (for Picture Tube Clamp)	1			
-255-48	(+IP) 2φ×6 (for Table Stand Cushion)	3			
-770-28	(+IB) 2φ×5 (for Control Panel)	1			
4-002-741-00	(+IP) 4φ×7 (for Carrying Handle)	2			

TV5-202E

NOTE for TV 5-202E

SONY Micro TV Model 5-202E is specially made for the North European countries (Denmark, Norway and Sweden) and satisfies DEMKO, SEMKO and NEMKO Specifications. All the features of the 5-202E are entirely same as 5-303E, which is also made for Continental Europe except for the points explained below. Therefore please refer to the Servicing Guide for 5-303E when the set is repaired.



1. Difference between 5-202E and 5-303E.

	<u>5-202E</u> <u>Black</u>	<u>5-202E</u> <u>White</u>	<u>5-303E</u>
Battery Charger	NO	NO	Built-in
AC Power Cord	fixed	removable	removable


2. Parts List for 5-202E (Special Parts only)

<u>Part No.</u>	<u>Description</u>	<u>Q'ty per one set</u>
I-421-024-11	Filter Choke Coil	1
I-441-099-11	Power Transformer	1
I-506-056-11	4 Pole Plug for 5-202E (White)	1
X-40030-59-1	4 Pole Plug for 5-202E (Black)	1
I-532-037-11	Fuse 1.6A	1
I-534-055-11	AC Power Cord	1


Schematic Diagram for Power Supply Block

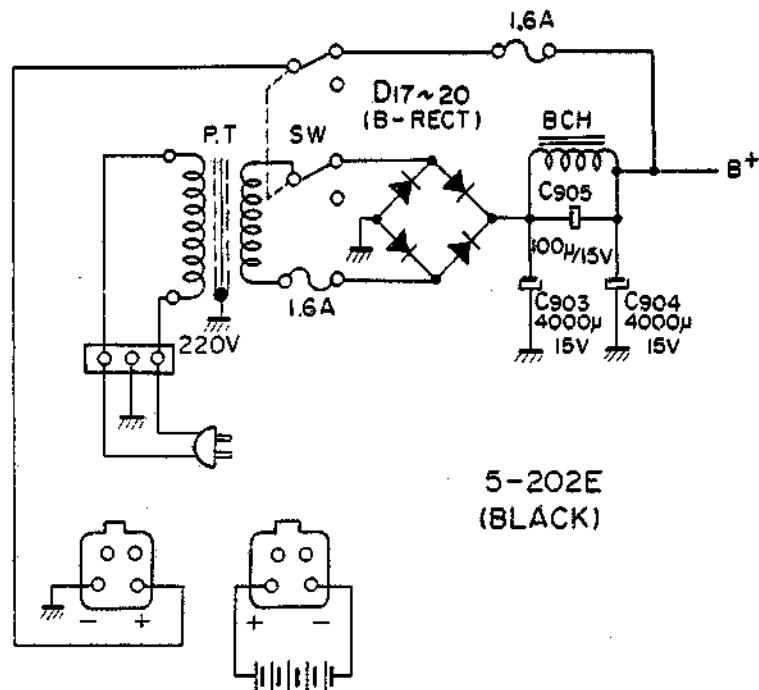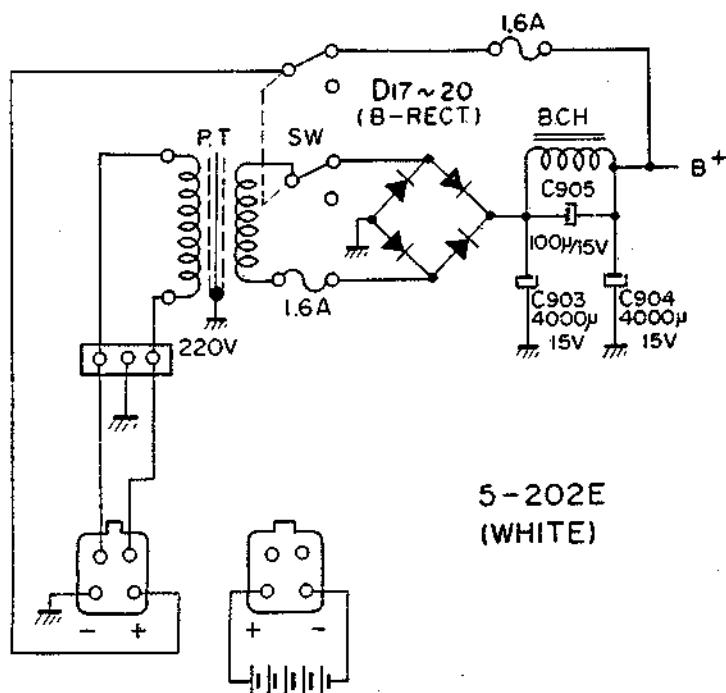5-202E
(BLACK)5-202E
(WHITE)

5-202E SCHEMATIC DIAGRAM

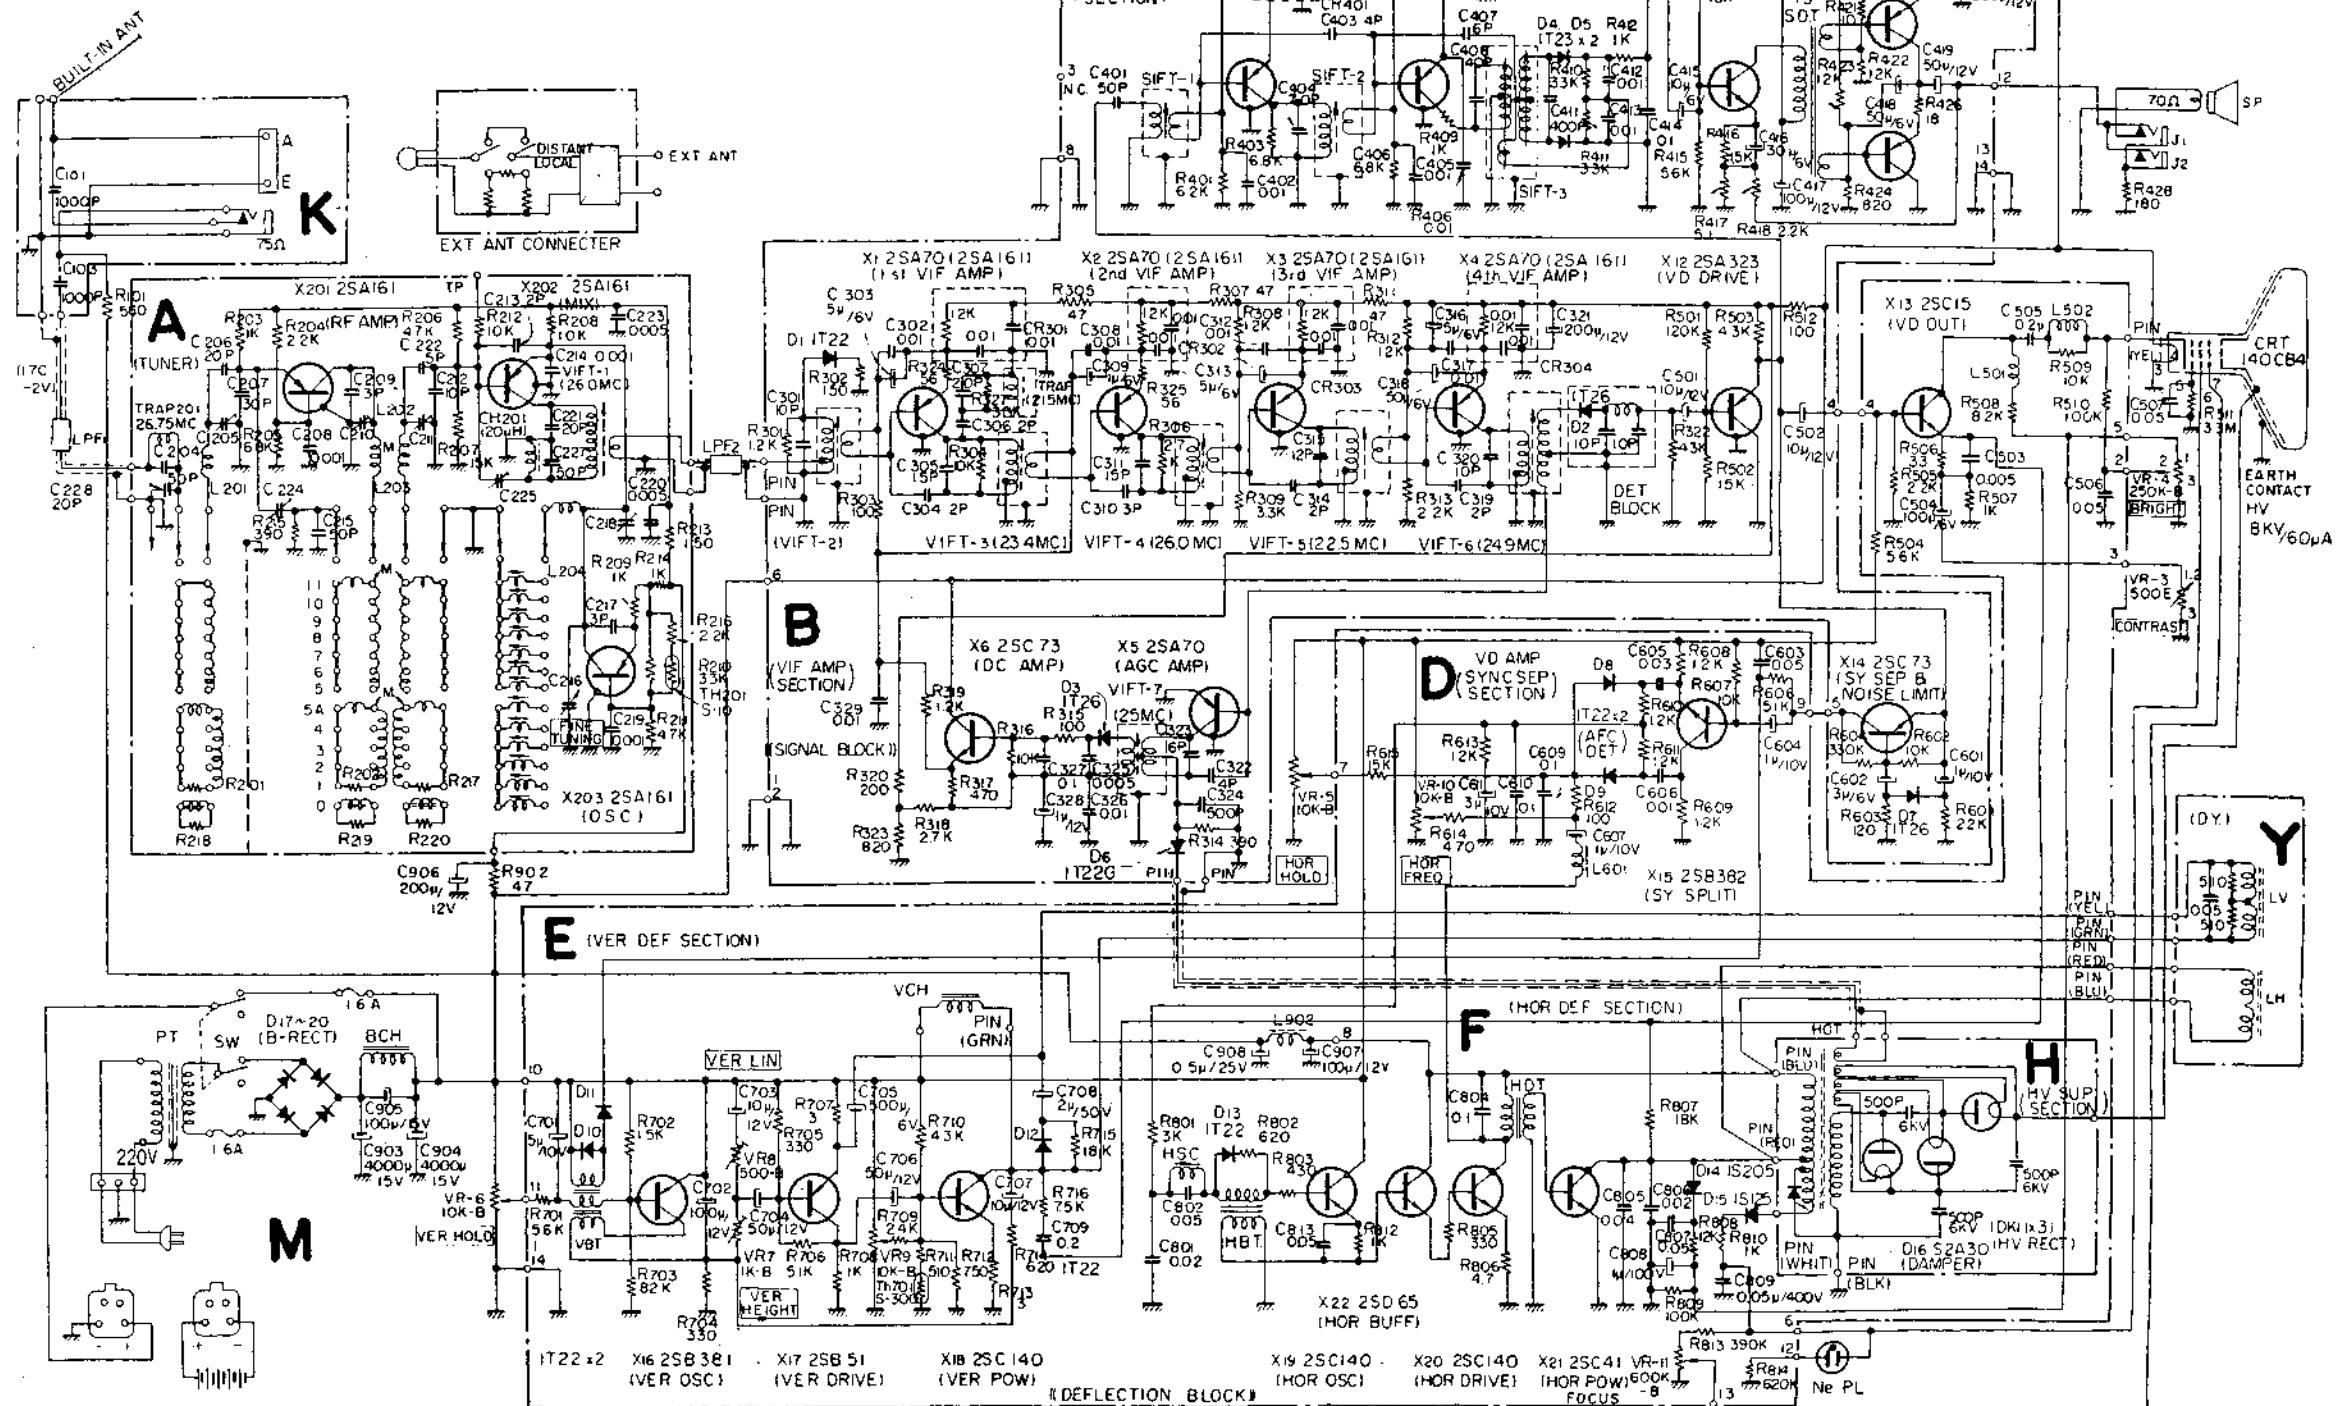

5-202 V SCHEMATIC DIAGRAM

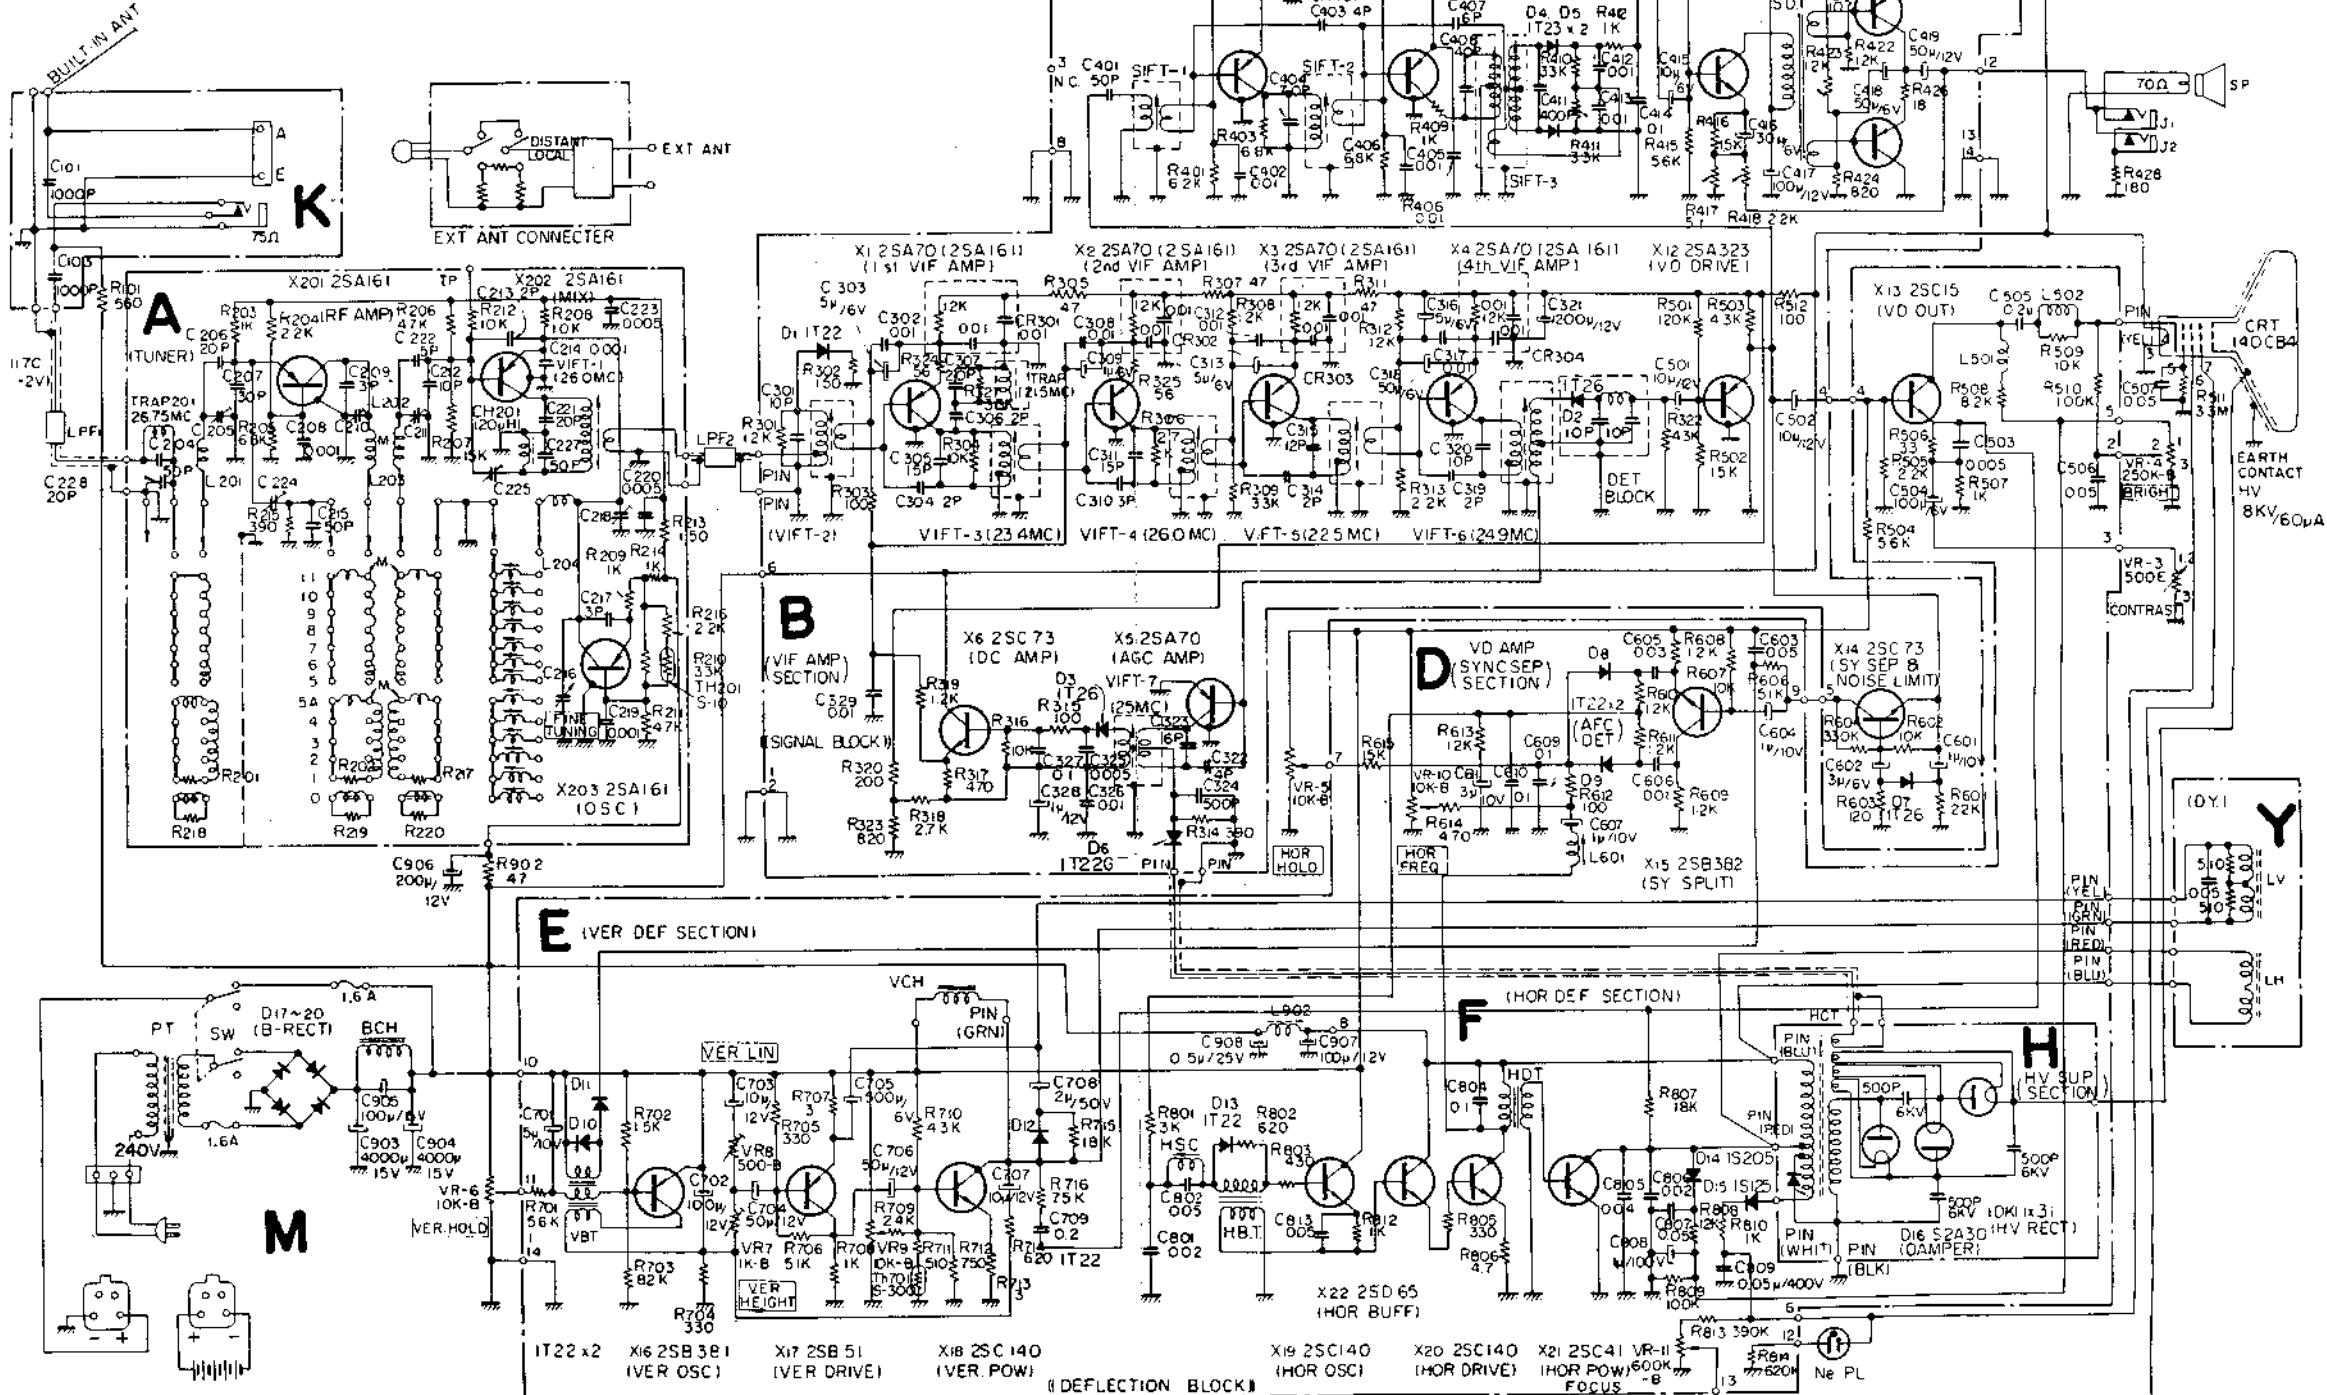

Sony Corporation
V and Consumer Video Group

9-962-063-6

© 1969

81C0406-7
Printed in Japan

TV5-303E&T

202

714



B & W TV

E: For Continental Europe (excl. France, Monaco, Italy & OIRT members) T: For Italy

Specifications

Picture Tube: 5", 70° Deflection, Aluminized Screen

Transistor: 25 (5 Silicon—including 3 Epitaxial 20 Germanium)

Diode: 20 (Including 4 Selenium)

Channel Coverage: E-2 to E-11 (5-303E), A to H (5-303T)

Maximum Sensitivity: 10 μ V (10Vpp at Picture Tube Cathode)

IF Circuit: 4 Stages with 5 stagger tuned elements

Video IF 26.75 Mc, Sound IF 21.25 Mc, Bandwidth 3.75 Mc/ \sim —3 dB—6 dB

Resolution: Vertical 400 lines, Horizontal 300 lines

Sound System: 5.5 Mc Intercarrier System

Power Output Stage OTL System 150 mW.

Speaker 3", 70 Ω Voice Coil

Automatic Control: Pulse-operated AGC, Diode AFC,

Sync. ANS (Automatic Noise Suppressor)

Power Requirement: AC 220V, 50c/s, DC 12V Battery (3.5 AH)

Power Consumption: AC 13W, DC 9.6W (0.8A)

Dimensions: 7-5/8" (W) \times 4-1/4" (H) \times 7-1/4" (D)


Weight: 8 lb

Glare Proofing: Smoked Filter, 70% Transparency


SONY®
SERVICE MANUAL

CONTENTS


	Page
Specifications for the SONY Micro-TV 5-303E and 5-303T	1
THE SONY MICRO-TV MODEL 5-303E and 5-303T	4
GENERAL	4
THE TUNER	7
SIGNAL CIRCUIT BOARD SECTION	9
DEFLECTION CIRCUIT BOARD AND HIGH-VOLTAGE BLOCK SECTIONS	11
POWER SUPPLY SECTION	14
METHOD OF DISASSEMBLING THE SET	15
To Remove the Front Control Panel	15
To Remove the Back Cabinet Cover	15
To Remove the Telescopic Antenna and the Tuner	15
To Remove the Signal Circuit Board	16
To Remove the Deflection Circuit Board	17
To Remove the Chassis from the Front Panel	18
To Remove the Picture Tube	19
To Remove the High Voltage Block	19
TROUBLE SHOOTING	20
Raster	20
Video Output and Synchronization	22
Sound	24

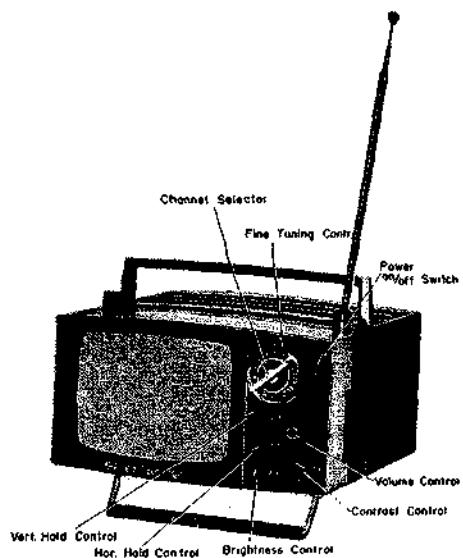

[Fig. 1]

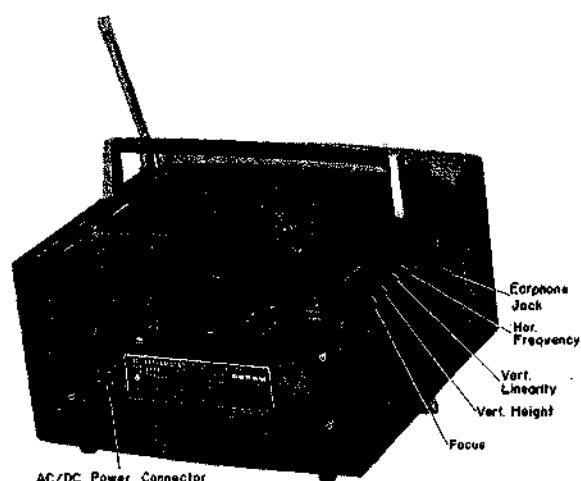


[Fig. 2]

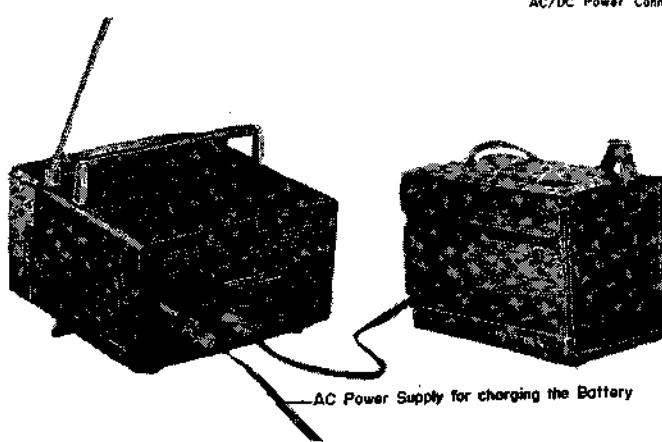

AC Power Supply for charging the Battery

[Fig. 3]

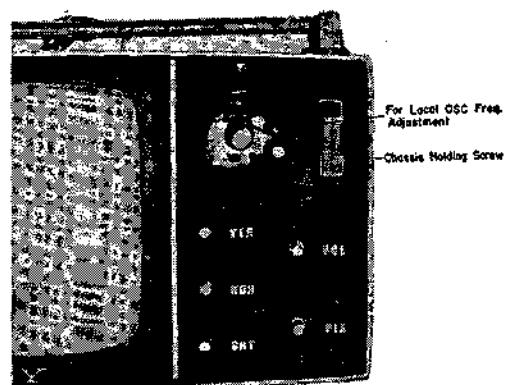

[Fig. 4]

THE SONY MICRO-TV MODEL 5-303E and 5-303T

General

The aim in the designing of the SONY Micro-TV Model 5-303E (5-303T) was the creation of a completely new type of TV set which could be achieved only by the use of transistors.

The concrete requirements given to be met from the start of the design were as follows:

- 1) To be small in size and light in weight.
- 2) To have the lowest power consumption of any mass produced TV set.
- 3) To operate perfectly as a completely portable TV set under all conditions.
- 4) To provide facilities for easy servicing.

To fulfil these requirements, many developments and improvements were made on the components and the circuit arrangements as explained below

1. Picture Tube 140CB4 (see Fig. 6)

The resolution of the picture depends greatly upon the construction of the picture tube, and the power consumption of the TV set is much influenced by the construction of the electron gun in the tube. Therefore, the key point of success in making a superior TV set is the improvement of the picture tube. The 140CB4 picture tube was specially developed for the SONY Micro-TV 5-303E (5-303T) and has the following features.

a) Resolution


Horizontal	28 lines per cm. (300 lines for full picture)
Vertical	45 lines per cm. (400 lines for full picture)

b) Deflection power

70 degree deflection and a neck diameter of 20 mm (3/4") result in lower deflection power although the anode voltage is as high as 8 KV. This gives a brightness of 500 lux.

- c) The power required for the heater is less than 1 watt.
- d) The overall length of tube is only 161mm (6-5/16").
- e) The cut-off voltage at the first grid is made very low by introducing techniques developed in transistor manufacturing into the assembly of the electron gun. Consequently, satisfactory contrast is obtained at lower video signal output.
- f) The square corners of the tube give a larger picture for the size of the tube.

Block Diagram

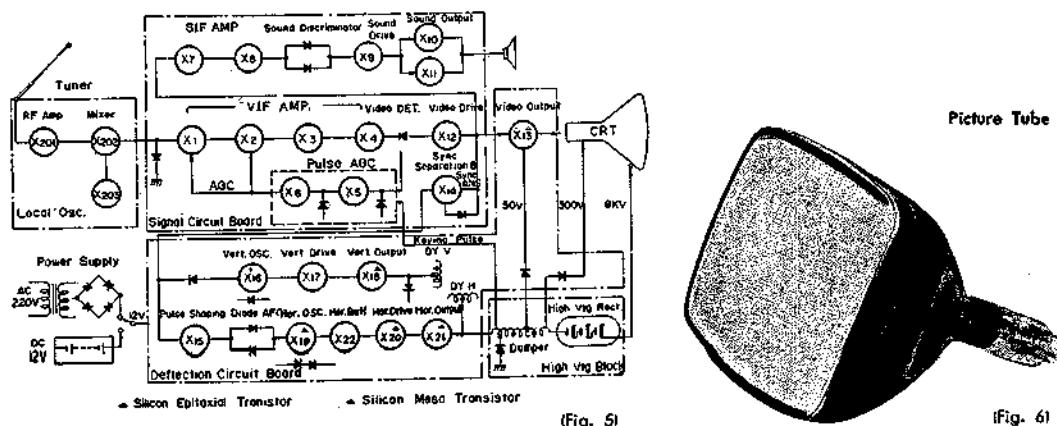

Specifications of Picture Tube 140CB4

Type :	Rectangular Frame	Diagonal Dimension :	137 mm (5-3/8")
Neck Diameter :	20 mm (3/4")	Full Length :	161mm (6-5/16")

Deflection :	Electromagnetic	Focusing :	Electrostatic Automatic
Deflection Angle :	70-degree	Ion Trap :	Unnecessary
Heater Voltage :	12.0V, 70 mA	Anode Voltage :	8 KV
Anode Current :	50μA	2nd Grid Voltage :	300 V
Focusing Voltage :	0~120 V	1st Grid Cut-off Voltage	Approx.-25 V

2. The SONY Epitaxia Transistor 2SC140 (See Fig. 7)

Silicon transistors have been used in high powered circuits in TV sets, such as Video Output Stage, Vertical Output Stage and for the Horizontal Oscillator, Horizontal Drive and Horizontal Output because of their higher working voltage, stable operation at high temperatures and lower I_{CBO} (Low Leakage Current). The disadvantage has been that the internal resistance (Collector Saturation Resistance, R_s) was high (app. 70Ω) causing high power consumption. The new SONY Epitaxial Transistor of the Mesa Silicon Type was developed to overcome this disadvantage. The R_s of the 2SC140 is 2Ω. Three of these special transistors are used in the Micro-TV Model 5-303E (5-303T). One each is used in the Vertical Output, Horizontal Oscillator and Horizontal Drive. One result of the use of these transistors is that the SONY Micro-TV will operate satisfactorily at an ambient temperature of 35°C (95°F).

Brief Specifications of the SONY Epitaxial Transistor 2SC140

Maximum Collector-Base Voltage :	60 V
Maximum Collector Current :	1A
Collector Dissipation (Max) :	1.7 W (without heat sink)
Collector Saturation Resistance (R_s) :	2Ω
Maximum Junction Temperature :	175°C

3. Automatic Gain Control Circuit

The AGC system is of the pulse type and an Automatic Noise Suppression (ANSI) circuit is included in the synchronizing pulse separation circuit. With the use of these circuit the SONY Micro-TV 5-303 E(5-303T) will maintain synchronization even in a moving car where the signal strength varies suddenly and almost continuously, and even in the presence of strong engine noise radiation.

4. Provision for Easy Servicing


Small size usually means difficult servicing. The SONY Micro-TV Model 5-303E (5-303T) is divided into five sections for easy service. (See the Block Diagram shown in Fig. 5). The sections are: Tuner, Signal Circuit Board, Deflection Circuit Board, High Voltage Block and Power Supply. The Signal Circuit Board and the Deflection Circuit Board are of the Plug-in type so that either of these Boards may be removed as a unit and replaced with a new one for easy and rapid repairing.

Epitaxial Transistor




(Fig. 7)

Level Diagram for Video

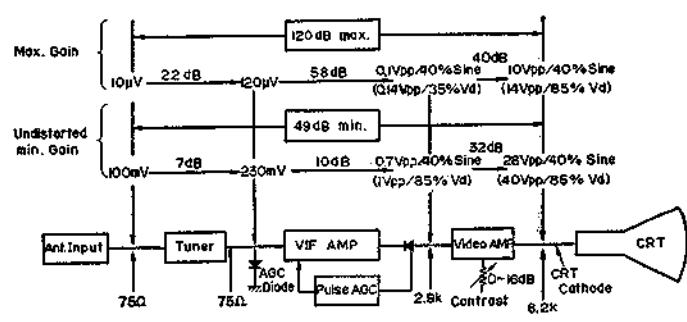


(Fig. 8)

For 5-303E

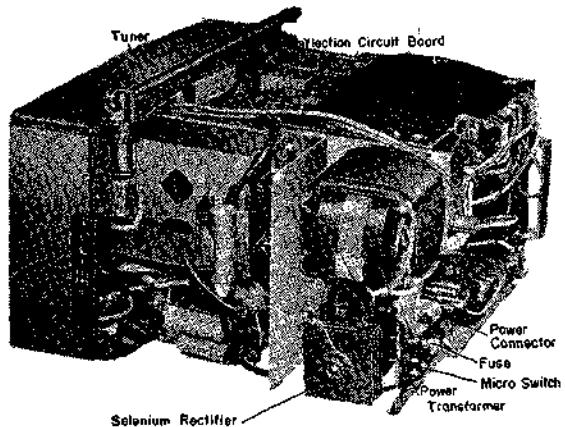


(Fig. 9-1)


For 5-303T

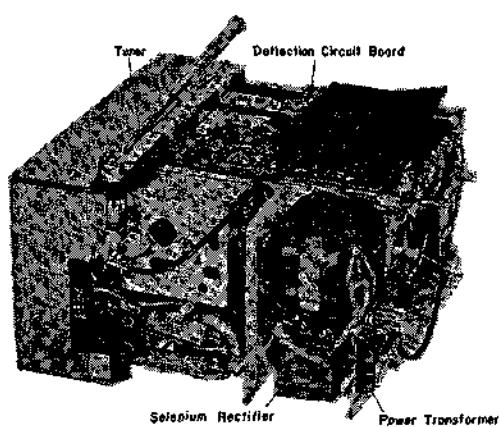


(Fig. 9-2)

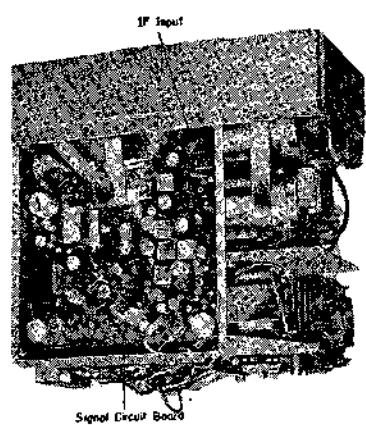


(Fig. 10-1)

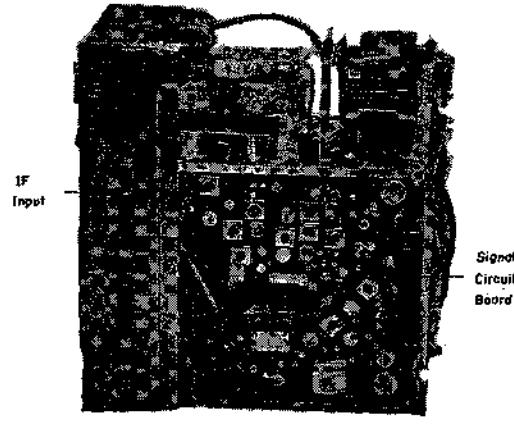


(Fig. 10-2)

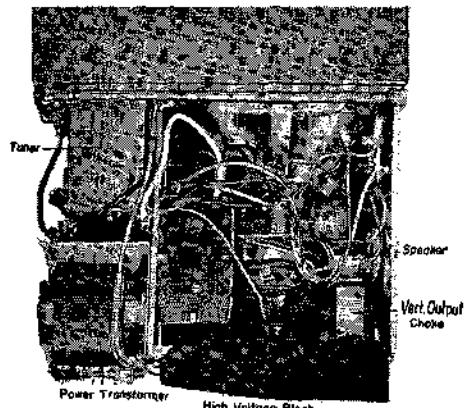


(Fig. 11-1)

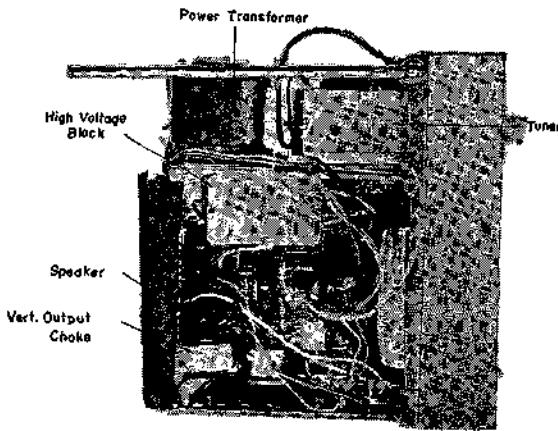

(Fig. 11-2)

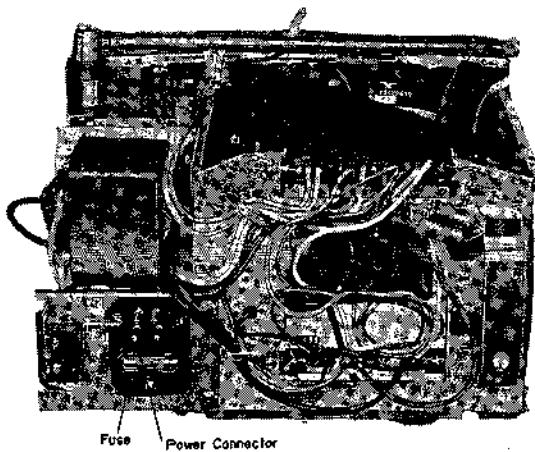

[Fig. 12]

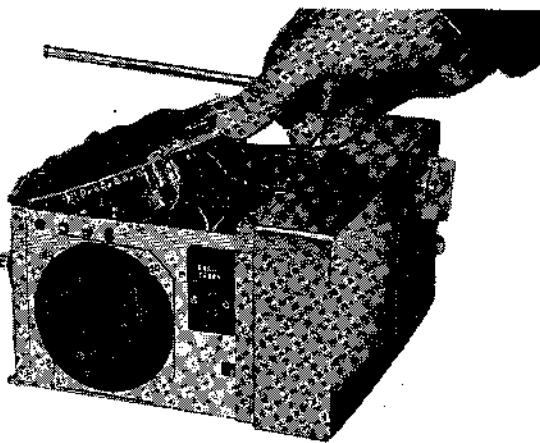


[Fig. 13]


The Tuner

The Tuner uses three PNP Mesa Type Germanium Transistors (2SA161). One is used in the RF Amplifier, one in the Mixer and one in the Local Oscillator. A Disc Type Turret is used for mounting all the coils and contacts for Channel Selection. Special Contact Points have been designed for easy and positive channel selection. The Transistors and other circuit parts are mounted directly above the Channel Switch and are enclosed within the Tuner Shield. The RF coils for each channel are connected in series but the Oscillator Coil for each channel can be adjusted independently. The AGC characteristics of the set is excellent and though the Input Attenuator has been dispensed with, the set with the Telescopic Antenna extended to its full length can be operated at a field strength of as much as 100 mv/m without overloading the circuits. This maximum field strength allowable can be extended further to 1v/m by retracting the Telescopic Antenna. The AGC Diode (D1) acts as a load for the Tuner and limits the output of the tuner to prevent overloading of the following circuits when the signal input level to the tuner is high.


Block Diagram of Tuner

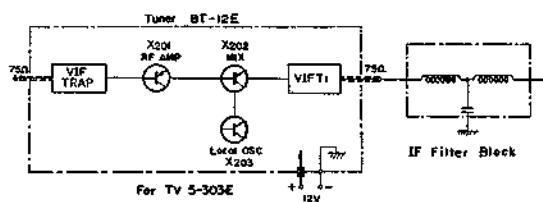


For 5-303E (Fig. 14-1)

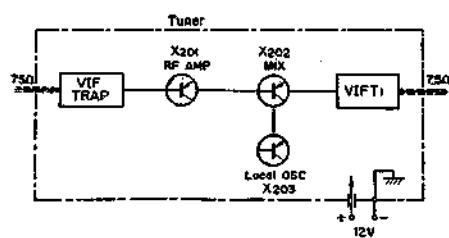


For 5-303T (Fig. 14-2)

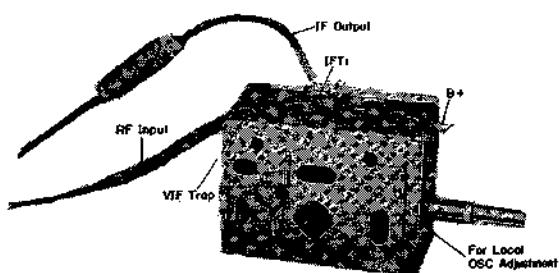

For 5-303E (Fig. 15-1)

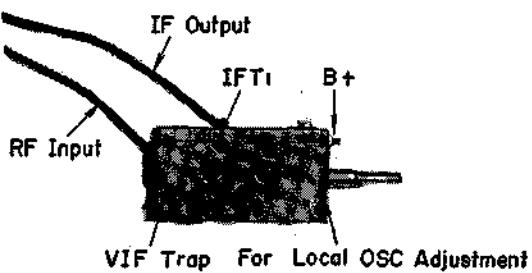

For 5-303T (Fig. 15-2)

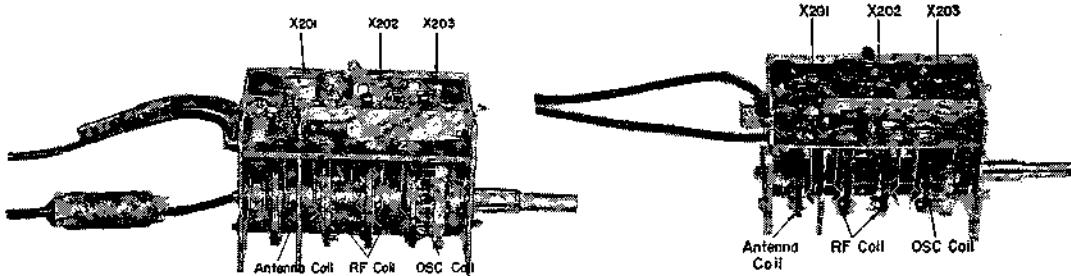

For 5-303E (Fig. 16-1)

For 5-303T (Fig. 16-2)


1. The RF Amplifier

The Antenna Impedance is low (75Ω) and the Input Impedance to the RF Transistor is also low. Between the Antenna and the Transistor Input is a tuned circuit of which the resonant impedance is from $1K$ to $4K\Omega$. Taps are used on both sides of the Tuned Circuit for correct impedance matching which is very important. A tap on the Inductance is made on the Antenna side and a tap is made on the Capacitance on the Transistor side for the impedance matching. The RF Transistor output circuit is double tuned with mutual coupling (Double Peaks). This in combination with the single peak of the input circuit gives an essentially flat Bandwidth of 6 Mc for this stage. A Base-grounded Circuit is used for the following reasons.

- 1) The difference in gain between the lower frequencies and the higher frequencies is less in the Base-ground Circuit.
- 2) The adjustment of neutralizing capacitance is very critical in the emitter-grounded circuit so that stability is reduced.
- 3) The Base-grounded Circuit with transistor corresponds to the grounded-grid circuit with vacuum tube. The undesirable feed back between the collector and emitter is greatly reduced in this circuit because the base is grounded. This keeps the amplifier stable even at higher frequencies.


A neutralizing capacitor is used in the emitter circuit as shown in Fig. 17 to prevent oscillation due to stray capacitance. R_{ch} in Fig. 17-1 is used for a choke coil which grounds the neutralizing point for DC while keeping it at an appropriate AC potential.

Basic Circuit for RF Stage




For 5-303E (Fig. 17-1)

Neutralizing Circuit for RF Stage



(Fig. 17-3)

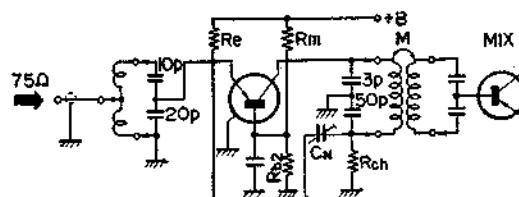

For 5-303T (Fig. 17-2)

A gain of 14 dB is possible at 200 Mc with a circuit of this type but too much gain tends to make the set unstable and hence the gain has been kept to be about 10 dB in our circuit. The gain on the lower channels tends to be higher than that on the higher channels, and so the damping resistors are inserted in the circuit of the lower channels to make the gain difference between the higher and lower channels within ± 1.5 dB.

2. The Mixer Circuit

The Mixer Transistor 2SA161 is emitter-grounded. Impedance matching is made by a capacitance divider in the same way as in the RF Amplifier. The local Oscillator signal is injected into the base of the transistor. The power dissipated in the mixer transistor is very much less (about $1/30 \sim 1/50$) than the plate loss of the tube mixer. The voltage of the Local Oscillator signal injected is about 0.2 Vrms, which is also much smaller ($1/10 \sim 1/20$) than that in tube mixer. Furthermore, the G_m of the transistor mixer is high and hence the troubles with mixer noise encountered in tube circuits are of no consequence here in our circuit. This circuit is also neutralized to prevent undesired oscillation.

3. The Local Oscillator

The Local Oscillator uses a Colpitts circuit. This circuit is well suited for this use as it does not require a tap on the oscillator coil. The transistor (2SA161) is base-grounded. The thermistor in the base circuit serves to prevent oscillator drift due to temperature changes. The drift is kept within 200 Kc. As mentioned before, each oscillator coil is independent of the others so that the oscillation frequency can be adjusted from outside the tuner by adjusting the screw type cores. The cylindrical Fine Tuning Capacitors are separately shielded to prevent radiation from the set. The adjustable range of the Local Oscillation is approx. 1.5 Mc for Channel 2 (channel A for 5-303T) and approx. 3 Mc for channel 11 (channel H for 5-303T).

Signal Circuit Board Section

The Signal Circuit Board includes the Video IF, AGC, Sound Amplifier, Video Drive and Synchronizing Pulse Separation circuits. (Fig. 18)

1. Video IF Section

- ☆ The Video IF Section consists of four stages with five stagger tuned elements.
- ☆ The Video IF is 26.75 Mc while the Sound IF is 21.25 Mc.
- ☆ The bandwidth of this section is 3.75 Mc. (Fig. 19-1)

2. Automatic Gain Control (Fig. 19-2)

The Pulse AGC developed by SONY and the Diode AGC are used together in this set.

The operation of the Pulse AGC Circuit is as follows :

The AGC signal is supplied to the Base of X5 from the Video Detector. The pulse which is generated at the Fly Back Transformer is rectified by D6 and applied to the Collector of X5 so that X5 operates only during the synchronizing period. The AGC signal is amplified by X5 and rectified by D3 and is then applied to the Base of X6 through a Filter Circuit. The Time Constant of this circuit is made very small so that the AGC response is extremely fast, thus permitting operation in moving cars where the signal level may vary with extreme rapidity. Then the AGC current from X6 controls the base bias voltage for X1 and X2, and thus the gain of the Video IF stages. The main features of the Pulse AGC are :

1) Quick response


The AGC action is much faster than in conventional circuits because the Time Constant of the filter circuit is very small (approx. $1/1000$ second) compared to that in the conventional one ($1/10 \sim 1/20$ sec). Accordingly, stable reception is achieved even when the input signal level varies at a rate of $1/100$ second.

2) Noise free AGC action

The AGC action is hardly influenced by noise since the synchronizing pulses only of the Signal are utilized. On the contrary, in the ordinary peak value AGC system, the AGC voltage varies considerably with the noise content of the video signal.


3) Effective AGC action

The AGC action is quite effective due to higher gain in the AGC loop. Stability against the variation of the temperature and of the power supply voltage is secured also. The AGC Diode D1 (1T22G) connected in parallel with VIFT2 conducts to lower the Q of the IFT2 when the input level exceeds 10 mV.

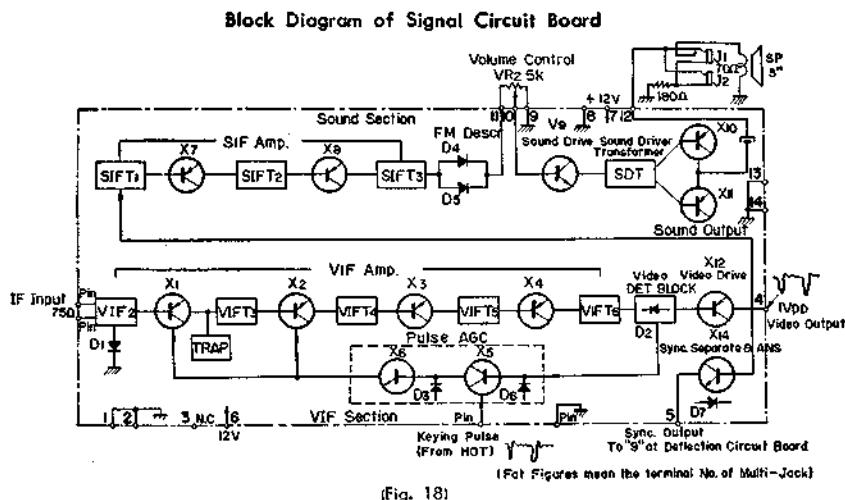


(Fig. 18) (Fig. Figures mean the terminal No. of Multi-Jack)

VIF Freq. Response

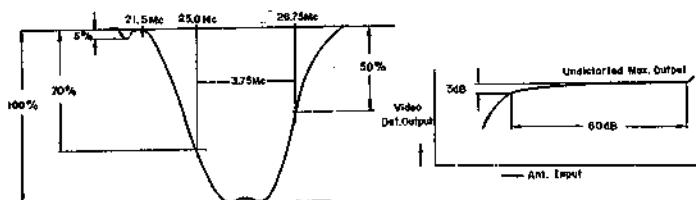

(Fig. 19-1)

AGC Characteristics



(Fig. 19-2)


3. Sound Amplifier Section

The Sound Amplifier Section has two IF stages, a Foster-Seeley Discriminator and two Audio Amplifier Stages. The Output Stage uses the SEPP-OTL (Single Ended Push-pull, No Output Transformer) system. The speaker diameter is 7.5 cm (3") and its impedance is 70Ω . There is a shield plate on SIFT3 to prevent the pulse from the Picture Tube Deflection Yoke to interfere with the sound. The maximum output is 150 mW.

4. Video Driver

The Video Driver Circuit is of the Emitter Follower Type (Collector-grounded). The Output Impedance is very

Signal Circuit Board (Mounted Side)

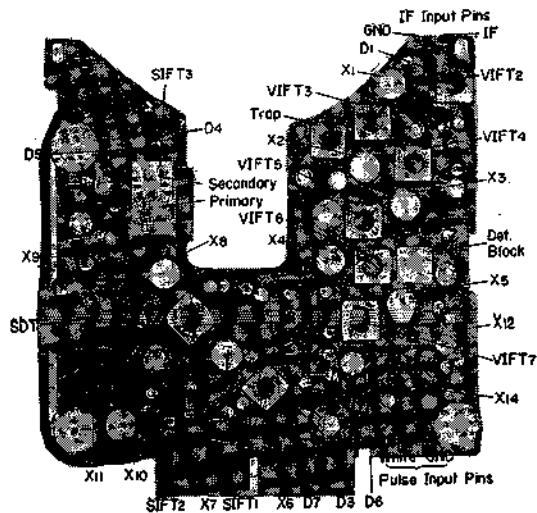

(Fig. 20)

low and this circuit has good frequency characteristics. The Video Signal, Synchronizing Pulse and the Sound are separated at the Emitter of X12 (2SA60).

5. Synchronizing Pulse Separation

The synchronizing pulse is separated at X14 which has the Base-grounded and a Bias Current of approximately Zero. The Vertical Synchronizing Pulse is taken from the collector. This stage includes the ANS (Automatic Noise Suppressor) for the synchronizing pulse in which the Diode D7 serves to shortcircuit the pulsing noises of excessive amplitude. This permits stable operation of the set in a car without fear of interference from the ignition sparks and other pulsive noises.

Deflection Circuit Board and High-Voltage Block Sections


The Deflection Circuit Board contains the Video Output and the Vertical and Horizontal Deflection Circuits.

1. Video Output Circuit (See Fig. 21)

A Mesa Type Silicon Transistor (2SC15; X13) is used in the Video Output Circuit. Over 40 Vpp of output is obtained from this circuit. The Picture Tube requires 30 Vpp for sufficient contrast. The Contrast Control is obtained by varying the feedback current by means of the Variable Resistor VR3 which is located in the Emitter Circuit of X13. The gain of the stage can be varied by 16 dB with this control. The Frequency Response is almost flat to 3 Mc by the use of Shunt-peaking (L501-R508) and Series-peaking (L502-R509). Since the Video IF Bandwidth is 3.75 Mc and the beam spot of the Picture Tube is very small, a very sharp picture is obtained. The Horizontal resolution is more than 300 lines and the Vertical, 400 lines. X13 is cut-off during the Blanking Period by the application of pulses from the Horizontal and Vertical Deflection Circuits. The Blanking Pulses are applied to the Emitter of X13.


Deflection Block

(Fat figures mean the terminal No. of Multi-Jack)

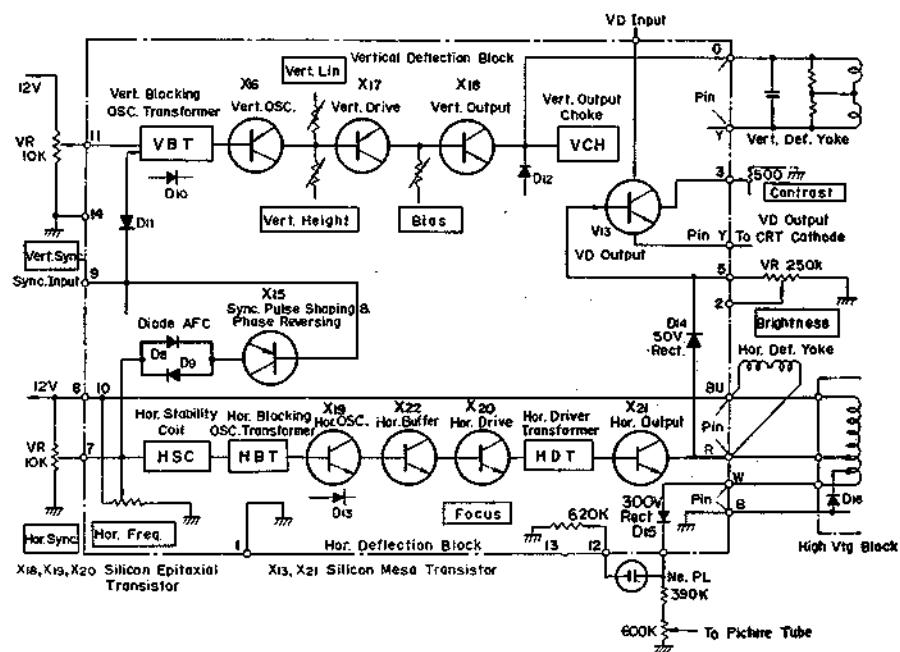


(Fig. 21)

Deflection Circuit Board (Mounted Side)

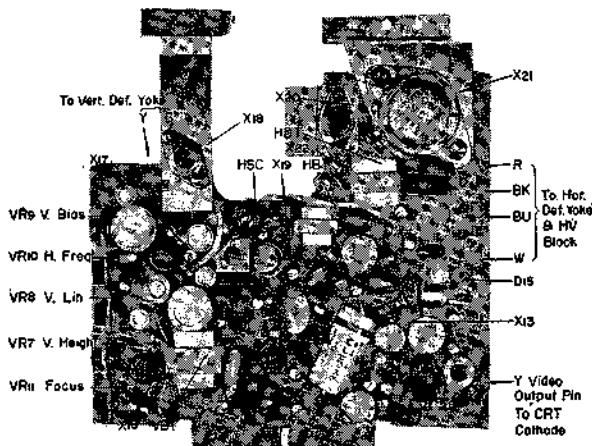


(Fig. 22)

High Voltage Block



(Fig. 23)

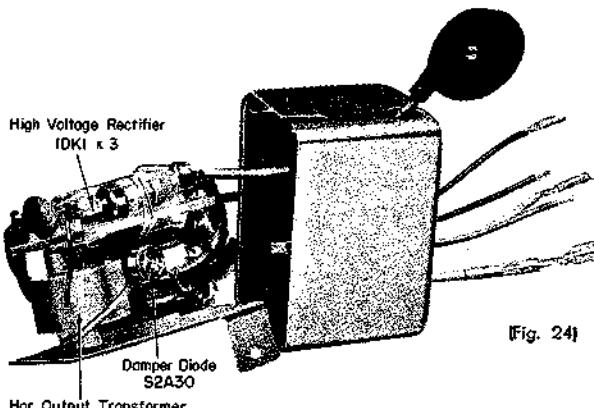

(Fig. 24)

2. Vertical Deflection Section (See Fig. 21)

The Vertical Deflection Sawtooth Wave is generated by blocking oscillations in the circuit of X16. It is then amplified by X17 and X18 and applied to the Vertical Deflection Yoke of the Picture Tube. Vertical Amplitude and Linearity are adjusted by Variable Resistors VR7 and VR8 in the Base Circuit of X17. An Epitaxial Transistor X18 (2SC140) is used in the Vertical Deflection Output Circuit. The Epitaxial Transistor is used in this circuit because of the characteristics of being able to withstand the high pulse voltages present in this circuit and because of freedom from temperature effects. The amplitude of the vertical pulses will not decrease with

a rise in temperature. The Vertical Deflection Coil on the Picture Tube is of the Toroidal Type which is more efficient than the conventional type.

3. Horizontal Deflection Section (See Fig. 21)

The Horizontal Deflection Pulse is generated by blocking oscillations in the circuit of X19 and is amplified by X22 and X20 which drives X21. X21 in turn generates the Sawtooth Wave which drives the Horizontal Deflection Coil. The Horizontal Output Transistor (X21) is also connected to the Hor. Output Transformer and supplies the input for the High Voltage Circuit with the Flyback Pulse during Cut-Off. All of the Transistors in the Horizontal Deflection Circuit are of the Silicon Type. This assures stable operation almost free from temperature effects.

4. High Voltage Block


The High Voltage Block consists of the Horizontal Output Transformer, Damper and the High Voltage Rectifier. All are housed together in one metal case. The Flyback Pulse is stepped up, rectified and the resulting voltages of 8 KV, 300 V and 50 V are applied to the Anode of the Picture Tube, the Second Grid of the Picture Tube and the Video Transistor (X13) respectively. The 8 KV is obtained by means of the three rectifier tubes in voltage tripler circuit.

5. Focus Adjustment


The voltage for the Second Grid of the Picture Tube goes also to the Potentiometer VR11 through the Neon pilot Lamp (Ne-PL). The Focusing Voltage is obtained from this Potentiometer and is variable between 0 and 180 V DC.

Power Supply Section


117 V AC input is converted to 12 V DC by four (4) Selenium Rectifiers in a Bridge Connection as shown in Fig. 26. The Power Transformer is located very near the Picture Tube. Power Transformer with oriented-core is used in this set to prevent any trouble from Flux Leakage.

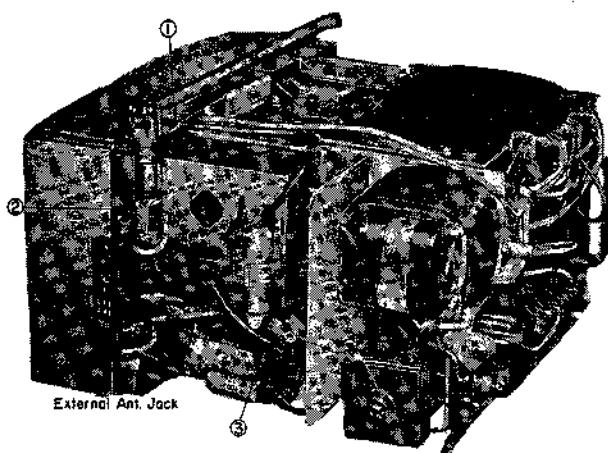

(Fig. 25)

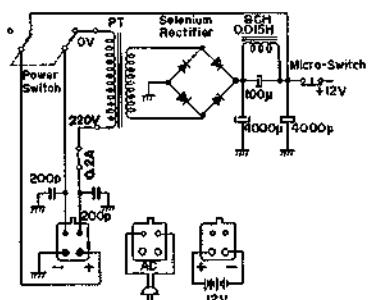

(Fig. 26)



(Fig. 27)


Method of Disassembling the Set

To Remove the Front Control Panel:


1. Pull all Control Knobs straight out. The Fine Tuning Knob may be somewhat difficult to remove—use force.
2. Remove the two small screws on the Front Control Panel. The Front Control Panel can now be removed. (Fig. 28)

To Remove the Back Cabinet Cover:

Remove screw ① (located on the top) and ② (located on the left side). Remove screws ③, ④, ⑤ and ⑥ on the back. The Back Cover can now be removed by pulling straight back. (Fig. 29)

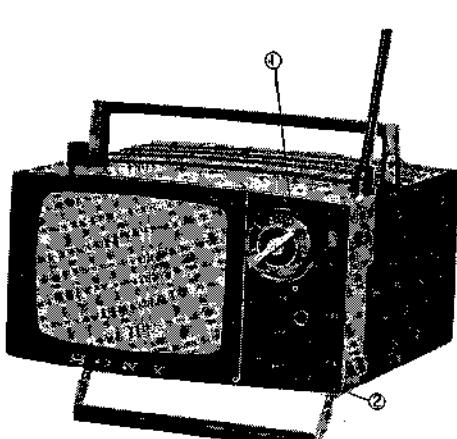


[Fig. 28]

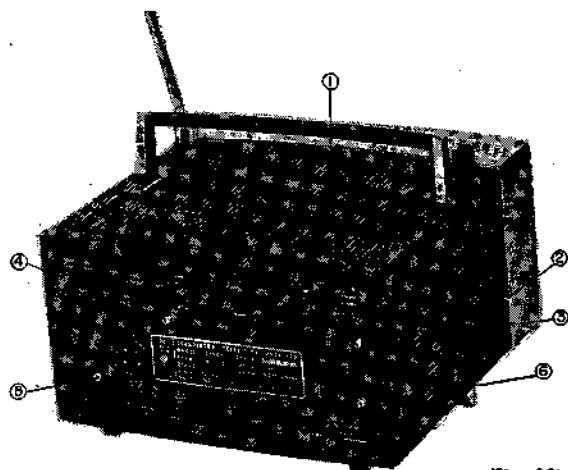

[Fig. 29]

To Remove the Telescopic Antenna and the Tuner:

1. Pull off the Pin Connectors of the Tuner IF Lead Wire and the shielded Ground Wire from the Terminals on the Signal Circuit Board as shown in Fig. 30.
2. Remove screws ①, ② and ③. ③ holds the back of the Tuner. (Fig. 30)
3. Push the Telescopic Antenna and the External Antenna Connectors in the direction shown by the Arrows in Fig. 30. The Telescopic Antenna and the Connectors can now be detached.

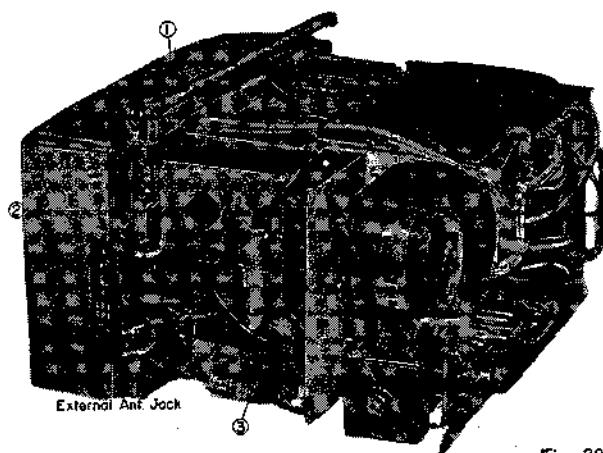


[Fig. 30]

4. The Tuner can be detached by removing two screws on the Front located near the Tuning Control Shaft. One screw is on the Front Panel and the other is inside on the Tuner as shown in Fig. 31.




(Fig. 31)

5. The Tuner, Telescopic Antenna and Antenna Connectors can be removed from the set by unsoldering the Red Wire to the Front of the Tuner, the Black Wire to the Chassis and the Yellow Wire with the Resistor to the Antenna Jack. The IF Lead Wire to the Tuner with the Pin Connectors can be pulled through from the back of the Picture Tube. (Fig. 32~33)

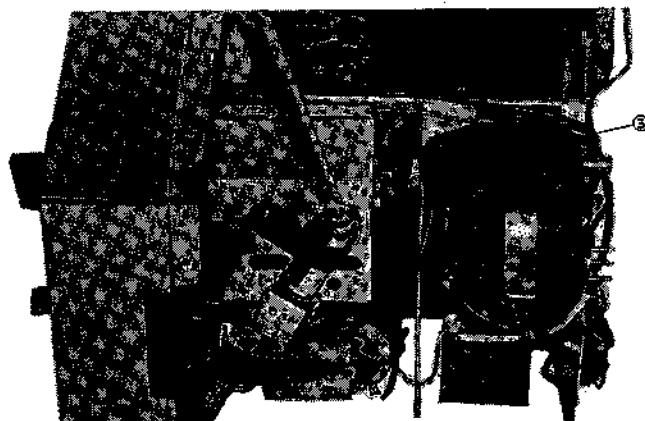


(Fig. 32)

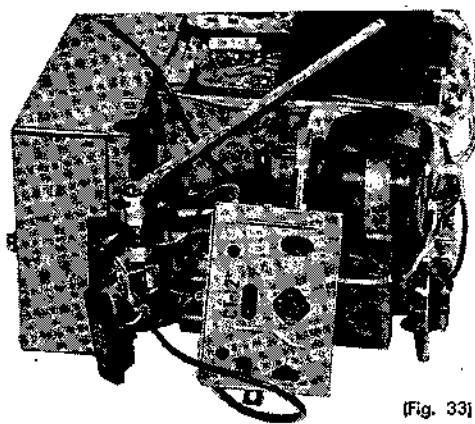

(Fig. 33)

To Remove the Signal Circuit Board :


Remove Screws ① and ②. Slightly loosen the Screw ③ holding the Connector Socket on the back of the Chassis (Fig. 34). Pull out the two Connectors from the Pins on the back side of the Signal Circuit Board. The Block can be removed as a unit by pulling directly away from the Connector Socket.

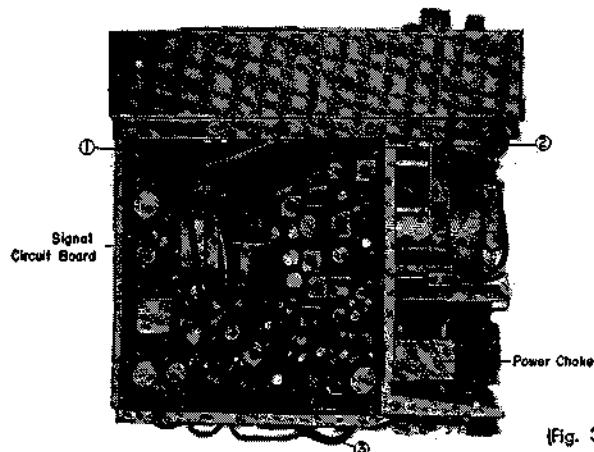

(Fig. 34)


To Remove the Deflection Circuit Board:

1. Remove Screws ①, ② and ③. (Fig. 35)

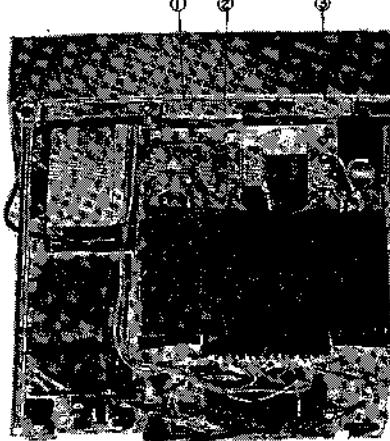


[Fig. 35]

2. Pull out the connectors shown in Fig. 36 & Fig. 37.

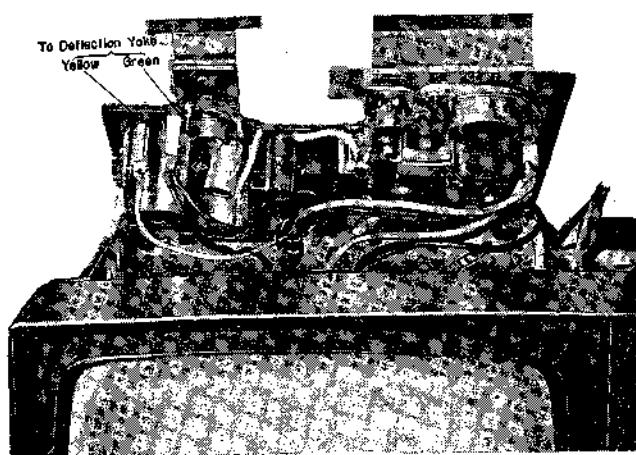


[Fig. 36]

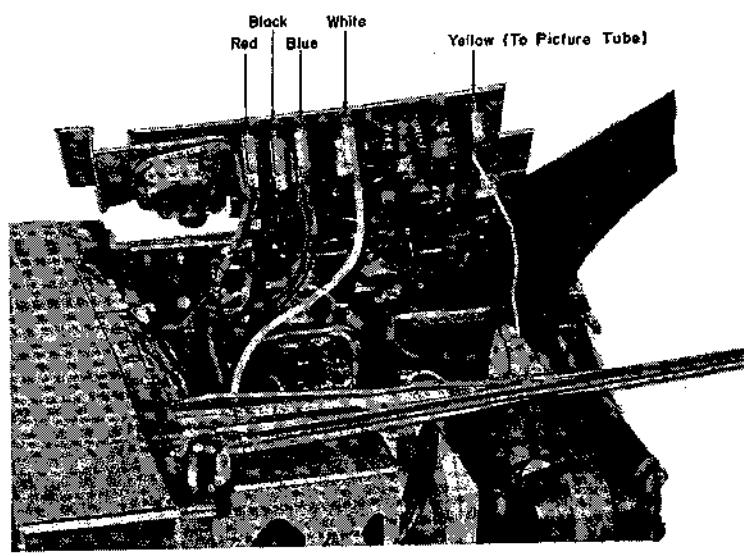


[Fig. 37]

Note: SONY Extension Cable and Circuit Connector are available to make service on the Circuit Boards more convenient. (Fig. 38 & Fig. 39)

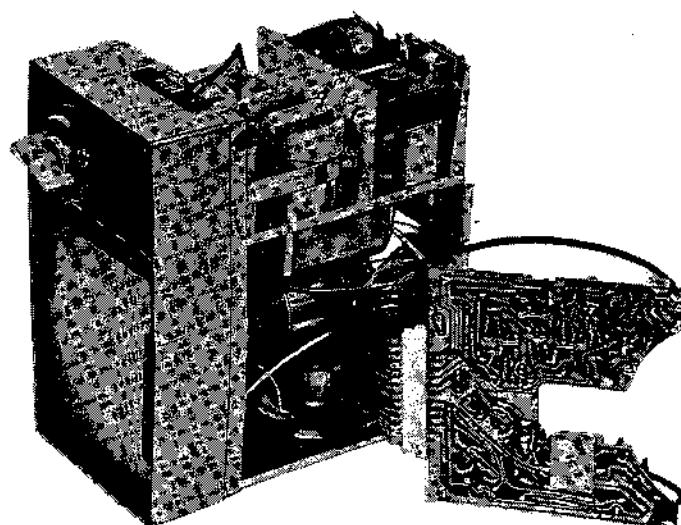

[Fig. 38]

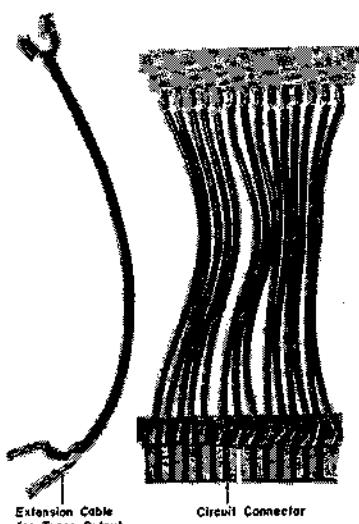


[Fig. 39]


To Remove the Chassis from the Front Panel: (Fig. 40)

Remove Screws ②, ③ and ④. Remove the Screw ① from the front side after pulling off the Channel Selector Knob and the Fine Tuning Knob (Refer to Fig. 4 on page 3).

Unsolder the Red, Blue and Black Wires from the Pin Connectors. These wires go to the Picture Tube Yoke. Also unsolder the Green Wire from the Choke Coil located just below the Speaker. Pull off the High Voltage Anode Connector from the side of the Picture Tube. This is a Snap Fastener but use caution in removing it. Pull off the Socket of the Picture Tube straight back.

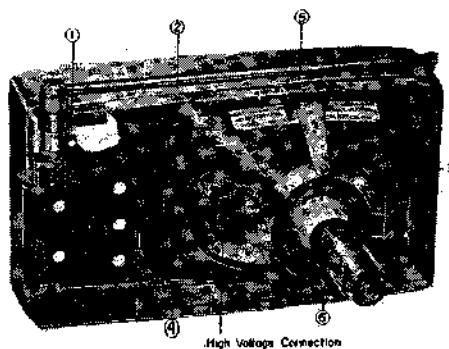

[Fig. 40]

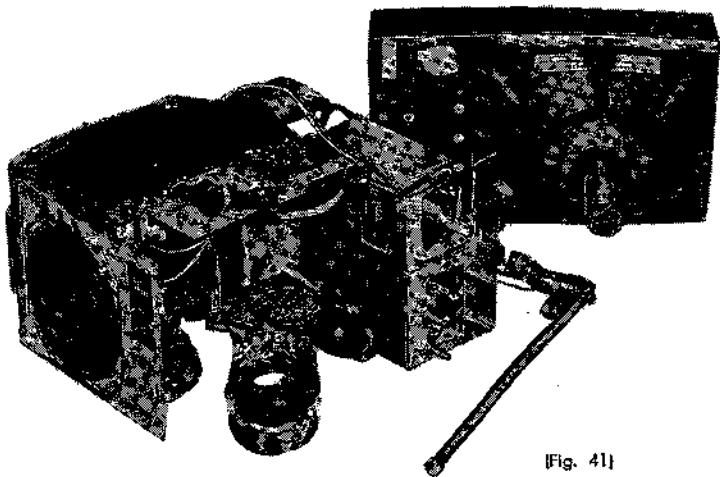

[Fig. 41]

To Remove the Picture Tube:

Remove the Screws and Nuts ⑤ and ⑥ shown in Fig. 40 and lift up the Picture Tube.

To Remove the High Voltage Block:

1. Unsolder three lead wires (Red, Blue & Black).
2. Pull off the Anode Cap
3. Pull off the Pulse Supplying Pin Connectors coming from the Signal Circuit Board.
4. Remove the Phillips Screw

NOTE: It is not recommended that the High Voltage Block be disassembled because a special Insulating Material is used inside to coat all High Voltage Points.

Trouble Shooting

by Replacement of the Defective Block

Provisions have been made in this Micro TV for easy servicing. The main part of the set is made of the four blocks of the Tuner, the Signal Circuit Board, the Deflection Circuit Board, and the High Voltage Block. Each of these blocks has complete interchangeability and hence the servicing can be performed by simply replacing the defective Block with a new one.

The ways of judging which Block is defective and the method of replacing the Blocks will be given below. In servicing according to this method, the following tools and parts are needed.

Replacement Blocks : (See Fig. 42)

Tuner, Signal Circuit Board, Deflection Circuit Board, and High Voltage Block

Tools and Meters :

Circuit-tester, of internal resistance around $20\text{ K}\Omega/\text{V}$ Cord with Clips.....2 pieces

Electrolytic Condenser, $3\mu\text{F}$, 50 V or more.....1 piece

Resistor, around $15\text{ K}\Omega$1 piece

Screw Drivers

For 3 mm Screws, Phillips and ordinary

For 2.6 mm Screws, Phillips and ordinary

No. 3 for watches (for adjustment of local oscillator)

Tweezers

Soldering Iron

Raster

1. No Raster and No Sound

Suspectable Item : \star Power Supply

Check the power supply. If there is no trouble in the power supply, there must be two or more Blocks defective. Then, proceed with the checking according to the following.

2. No Raster

See first whether the Neon Lamp is lit.

1) The Neon Lamp is OFF.

Suspectable Items : \star Deflection Circuit Board

\star High Voltage Block

a) Replace the Deflection Circuit Board.

b) If the Neon Lamp is not lit after (a), replace the High Voltage Block.

2) The Neon Lamp is lit.


Suspectable Items : \star High Voltage Block

\star The Picture Tube

\star The Brightness Control Circuit


a) See whether the filament of the Picture Tube is ON. If the filament is OFF, check the socket of the Picture Tube. The pins for the filament are Nos. 3 and 4.

b) If the filament is ON, the trouble is probably with the High Voltage Block. Before proceeding on to replace the High Voltage Block, see whether the cathode circuit of the Picture Tube (the Brightness Control Circuit) is all right.

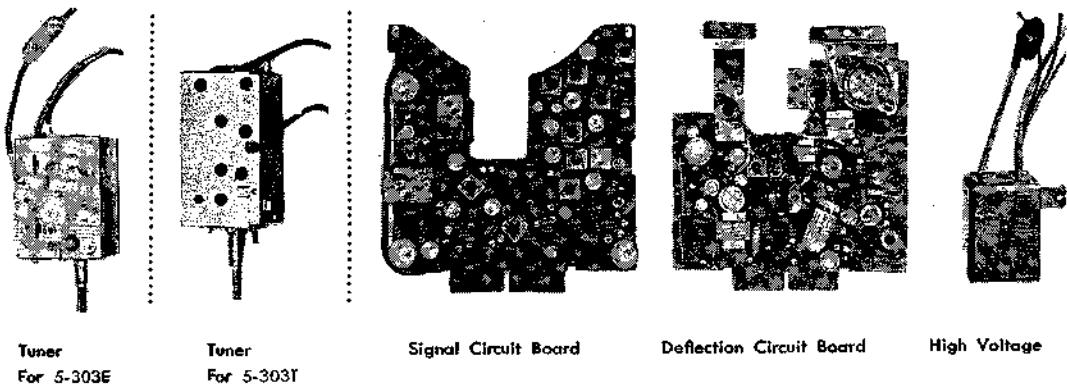

(Fig. 42)

Circuit Diagram for Video Amp. (Fat Figures mean the terminal No. of Multi-Jack)

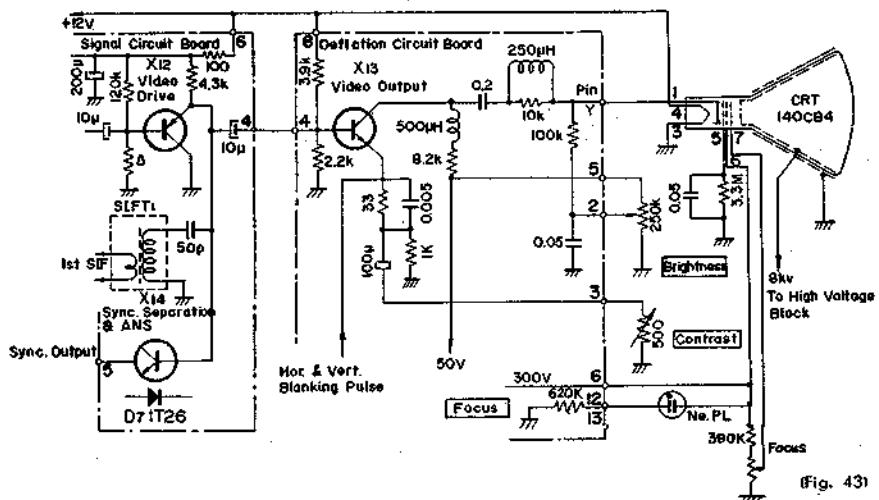

(Fig. 43)

To do this, measure the cathode voltage from the copper-clad side of the Deflection Circuit Board. (Refer to Fig. 43) If this voltage is varied between 0 and 40 to 50 volts by an adjustment of the Brightness Control, the cathode circuit is all right, and the High Voltage Block is to be replaced.

If this voltage is abnormal, the Brightness Control Circuit on the Deflection Circuit Board must be checked.

- c) If the raster still does not appear after replacing the High Voltage Block, the Picture Tube may be defective.

CAUTION

NEVER ATTEMPT TO CHECK THE HIGH VOLTAGE (8 KV) CIRCUIT BY SPARK TEST

The high voltage is often tested by a Spark Test. But, in Transistor TV this is likely to cause damage not only to the Horizontal Deflection Circuits but also to other seemingly not related parts of the set. Especially, the High Voltage spark will adversely affect the transistors on the Signal Circuit Board because of the Pulse AGC circuit employed.

- 3. Raster appears but is abnormal.

First of all, check the 12 V DC Power Supply.

- 1) Too small Raster

Suspectable Item :

☆ Deflection Circuit Board

Replace the Deflection Circuit Board

2) Raster is dark.

Suspectable Items :  Picture Tube
  High Voltage Block

- a) When the Raster Size is normal but is not bright enough, the trouble is almost certainly with the Picture Tube.
- b) When the Raster spreads out and gets dark while the brightness is meant to be increased, the trouble is with the reduced emission of the High Voltage Rectifier Tube and the High Voltage Block must be replaced.

3) The left side of the Raster is elongated and gets dark.

Suspectable Item :  High Voltage Block

This is an indication of broken Damper Diode, and hence the High Voltage Block must be replaced.

Video Output and Synchronization

1. No Picture (Sound is normal)

Suspectable Items :  Deflection Circuit Board
  Signal Circuit Board

Since the Video Output Circuit of this set is on the Deflection Circuit Board, check the Video Output Circuit as follows :

Apply AC test voltage taken from the secondary winding of the transformer through a $15\text{K}\Omega$ Resistor and a $3\mu\text{F}$, 50 WV or more, Electrolytic Capacitor, to the Terminal No. 4 (The input terminal to the Video Output Circuit of the Deflection Circuit Board as shown in Fig. 44). If the AC hum appears on the Picture Tube, replace the Signal Circuit Board. If not, replace the Deflection Circuit Board.

2. Failure of Synchronization

1) Failure of both Horizontal and Vertical Synchronization

Suspectable Items :  Deflection Circuit Board
  Signal Circuit Board

Measure the voltage at Terminal No. 5 of the Signal Circuit Board and decide whether the trouble is with the Signal Circuit Board or with the Deflection Circuit Board. The normal value of the voltage is around 10.5 V. (Fig. 44)

If the voltage is more than 10.5 V, replace the Signal Circuit Board.

If it is abnormally low, replace the Deflection Circuit Board.

2) Failure of either Horizontal or Vertical Synchronization alone

Suspectable Item :  Deflection Circuit Board
In this case replace the Deflection Circuit Board.

3. No Picture and No Sound

Suspectable Items :  Tuner
  Signal Circuit Board

a) Replace the Signal Circuit Board and see the result.

b) Apply the output from another tuner to the Input Terminal of the Signal Circuit Board as shown in Fig. 45, and see the result. The power to this Tuner is to be taken from the set with a length of cord with clips.

4. Only one or a few Channels are defective

Suspectable Item : ★ Tuner

If the Antenna System and the Fine Tunings are all right, the trouble is with the Tuner. This can be checked by use of another Tuner as mentioned in 3 (b).

5. Other Troubles


Suspectable Items : ★ Tuner

 ★ Signal Circuit Board.


 ★ Deflection Circuit Board

For troubles like low contrast, poor signal-to-noise ratio and poor resolution, replace the Signal Circuit Board first. Then, if the signal-to-noise ratio is still poor, replace the Tuner. If the contrast is low, replace the Deflection Circuit Board.

To Check Video Amp. & Synchronization Circuit

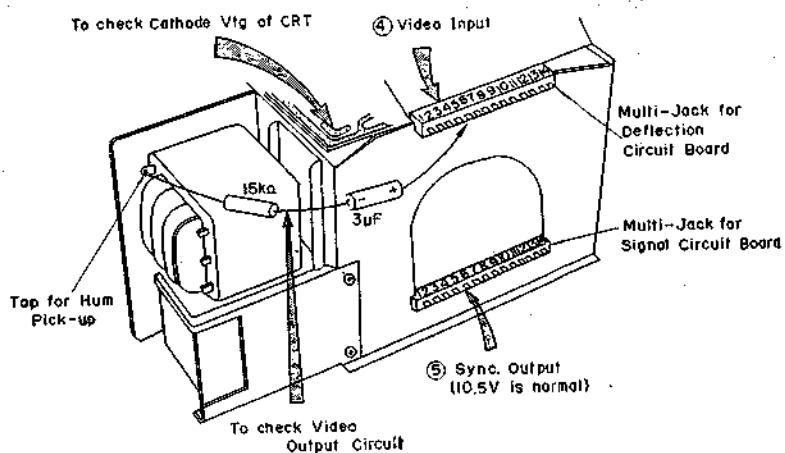

(Fig. 44)

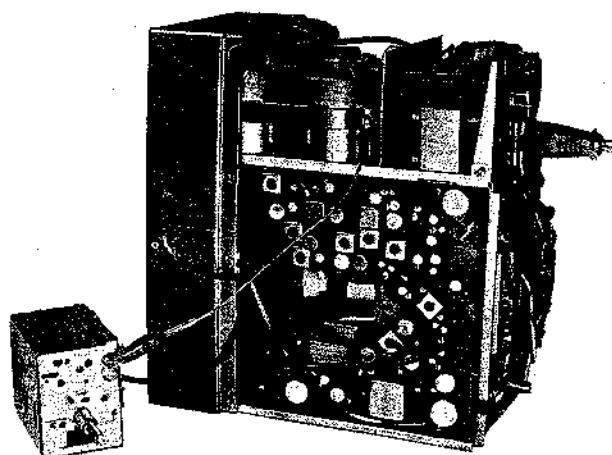

(Fig. 45)

Sound (Picture is normal)

1. No Sound

Suspectable Items : Speaker
 Signal Circuit Board

Listen with the earphone.

- a) Check the Speaker and the Earphone Jack if sound is heard through the earphone
- b) If still no sound can be heard replace the Signal Circuit Board.

2. Sound is distorted.

Suspectable Items : Speaker
 Signal Circuit Board

Judge by hearing the sound whether the trouble is with the defective Speaker. If the trouble is not caused by the Speaker, replace the Signal Circuit Board.

3. Buzzing

Suspectable Items : Antenna
 Fine Tuning
 SIFT3
 Signal Circuit Board

- a) If the Buzz appears only on some specific channel, the trouble is not with the set itself. Adjust the Antenna and the Fine Tuning.
- b) If the Buzz appears on all channels, adjust the blue core of SIFT3.
- c) Then, if the Buzz still exists, replace the Signal Circuit Board.

4. Other troubles with Sound

Suspectable Item : Signal Circuit Board

For other troubles with the sound, replace the Signal Circuit Board.

Sony Corporation

© 1965

9-962-063-01

— 24 —


78B0403-6

Printed in Japan

SONY®

S U P P L E M E N T T O
S E R V I C I N G G U I D E

MICRO TV 5-303E

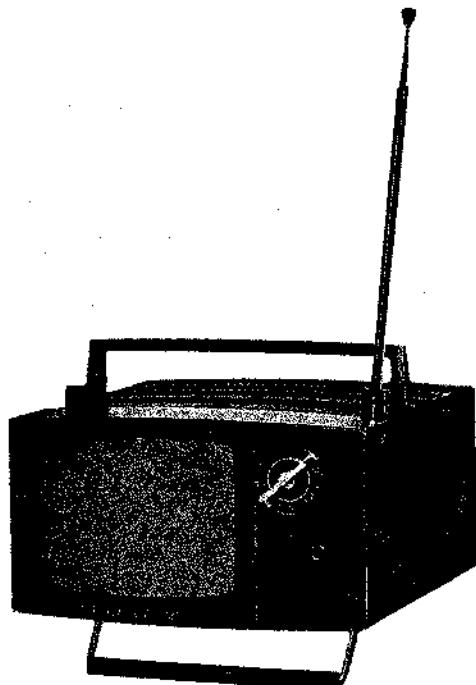


C O N T E N T S

	Page
Mounting Diagram	2
Signal Block	2
Deflection Block	3
Schematic Diagram	5, 6
Voltage Distribution Chart	
Tuner	4
VIF AMP Circuit	4
Sound Circuit	7
SYNC SPLIT Circuit	7
SYNC SEP, AMP & NOISE LIMIT Circuit	7
VERT Deflection Circuit	8
Video Output Circuit	8
HOR DEF Circuit	9
Electrical Parts List (A).....	10, 11, 12
Electrical Parts List (B)	12, 13
Mechanical Parts List	13, 14

Mounting Diagram


Signal Block ...

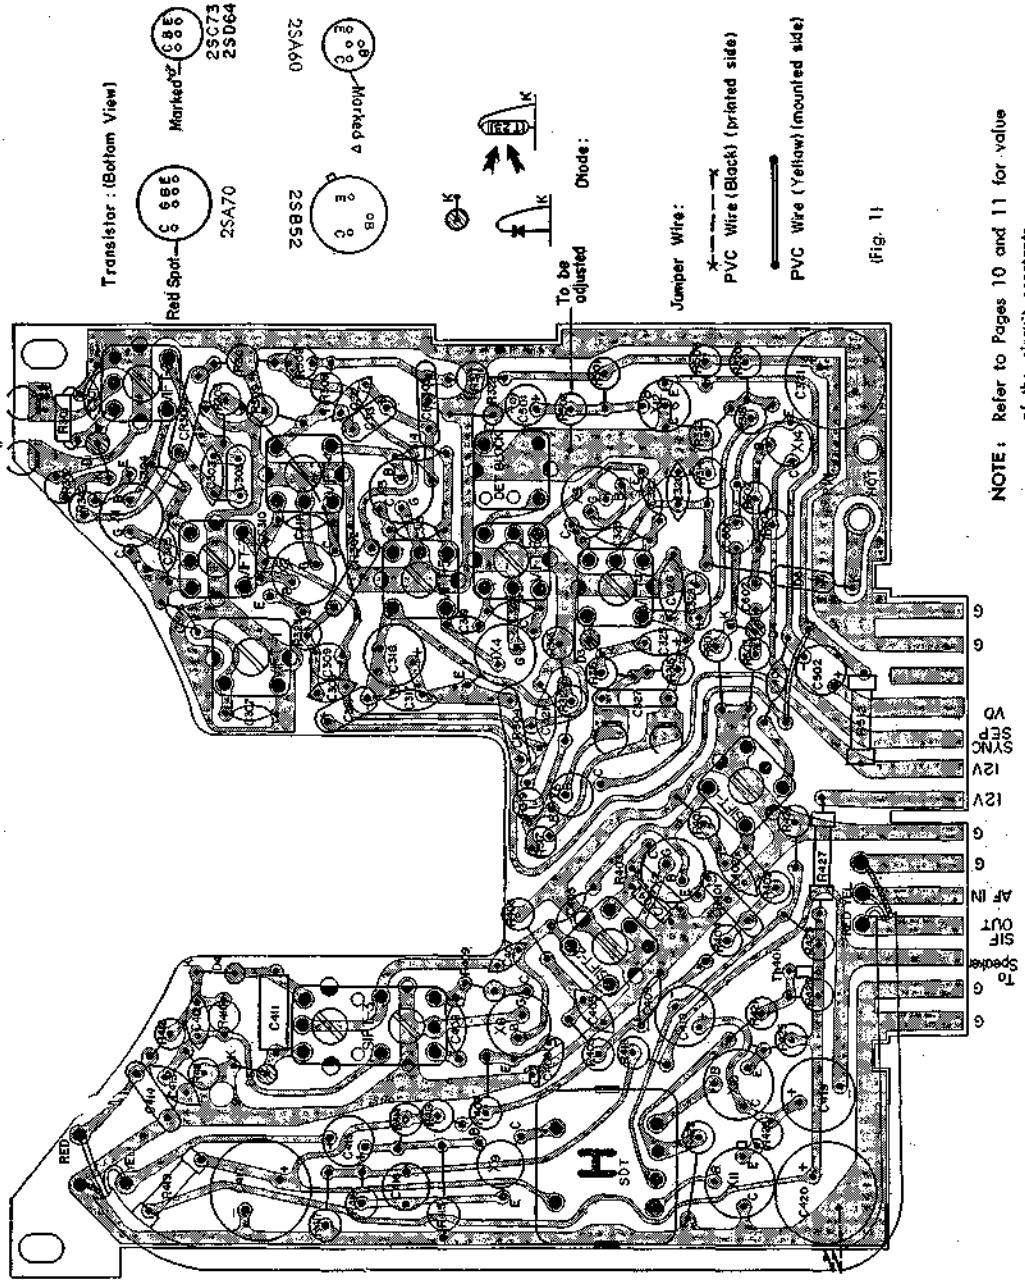

NOTE : Refer to Pages 10 and 11 for value of the circuit constants.

Mounting Diagram


— Deflection Block —

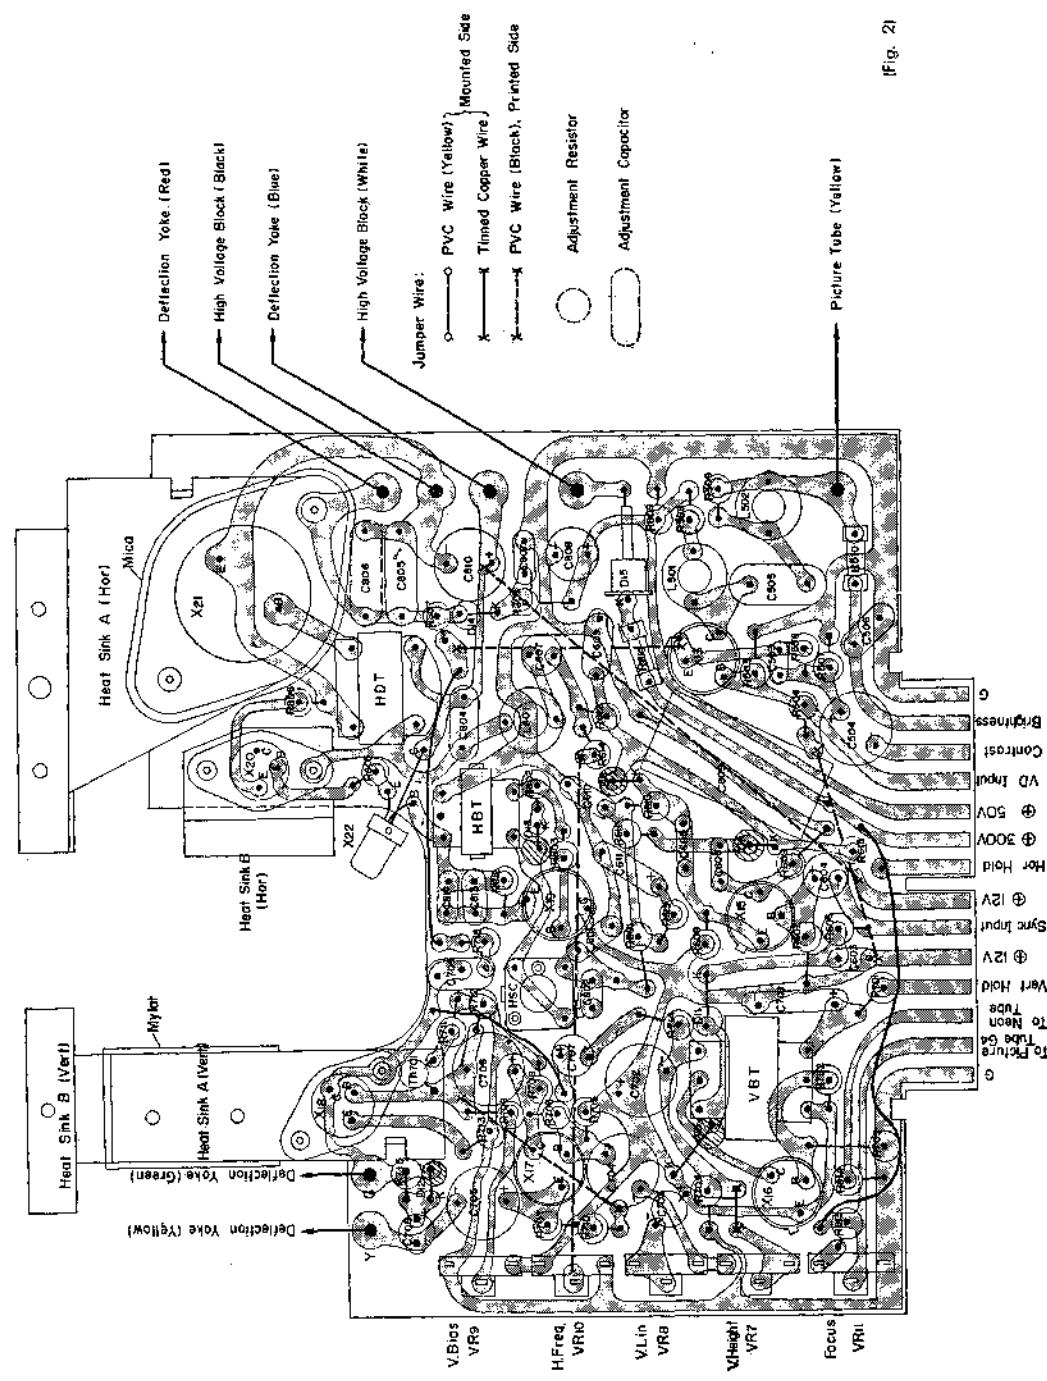

[Fig. 2]

Voltage Distribution Chart


— Tuner —

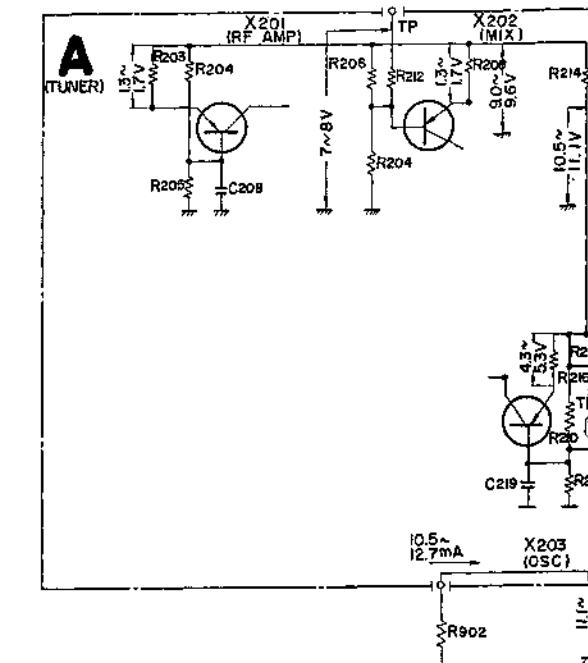

[Fig. 3]


Voltage Distribution Chart

— VIF AMP Circuit —

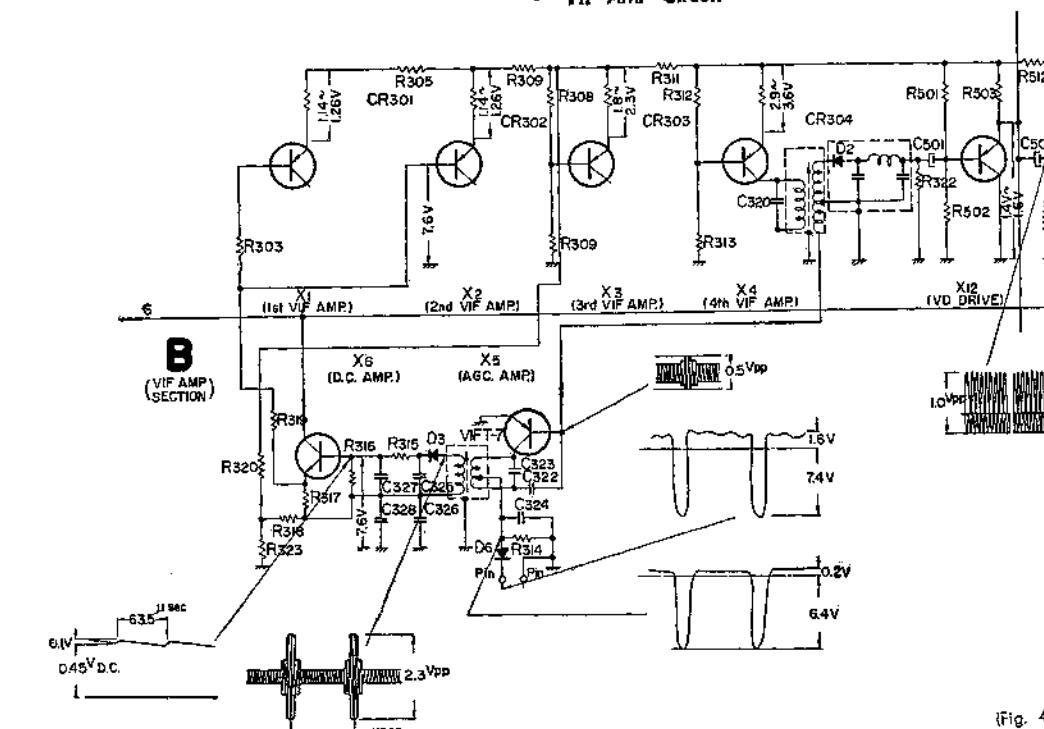

[Fig. 4]

Schematic Diagram for TV 5-303E

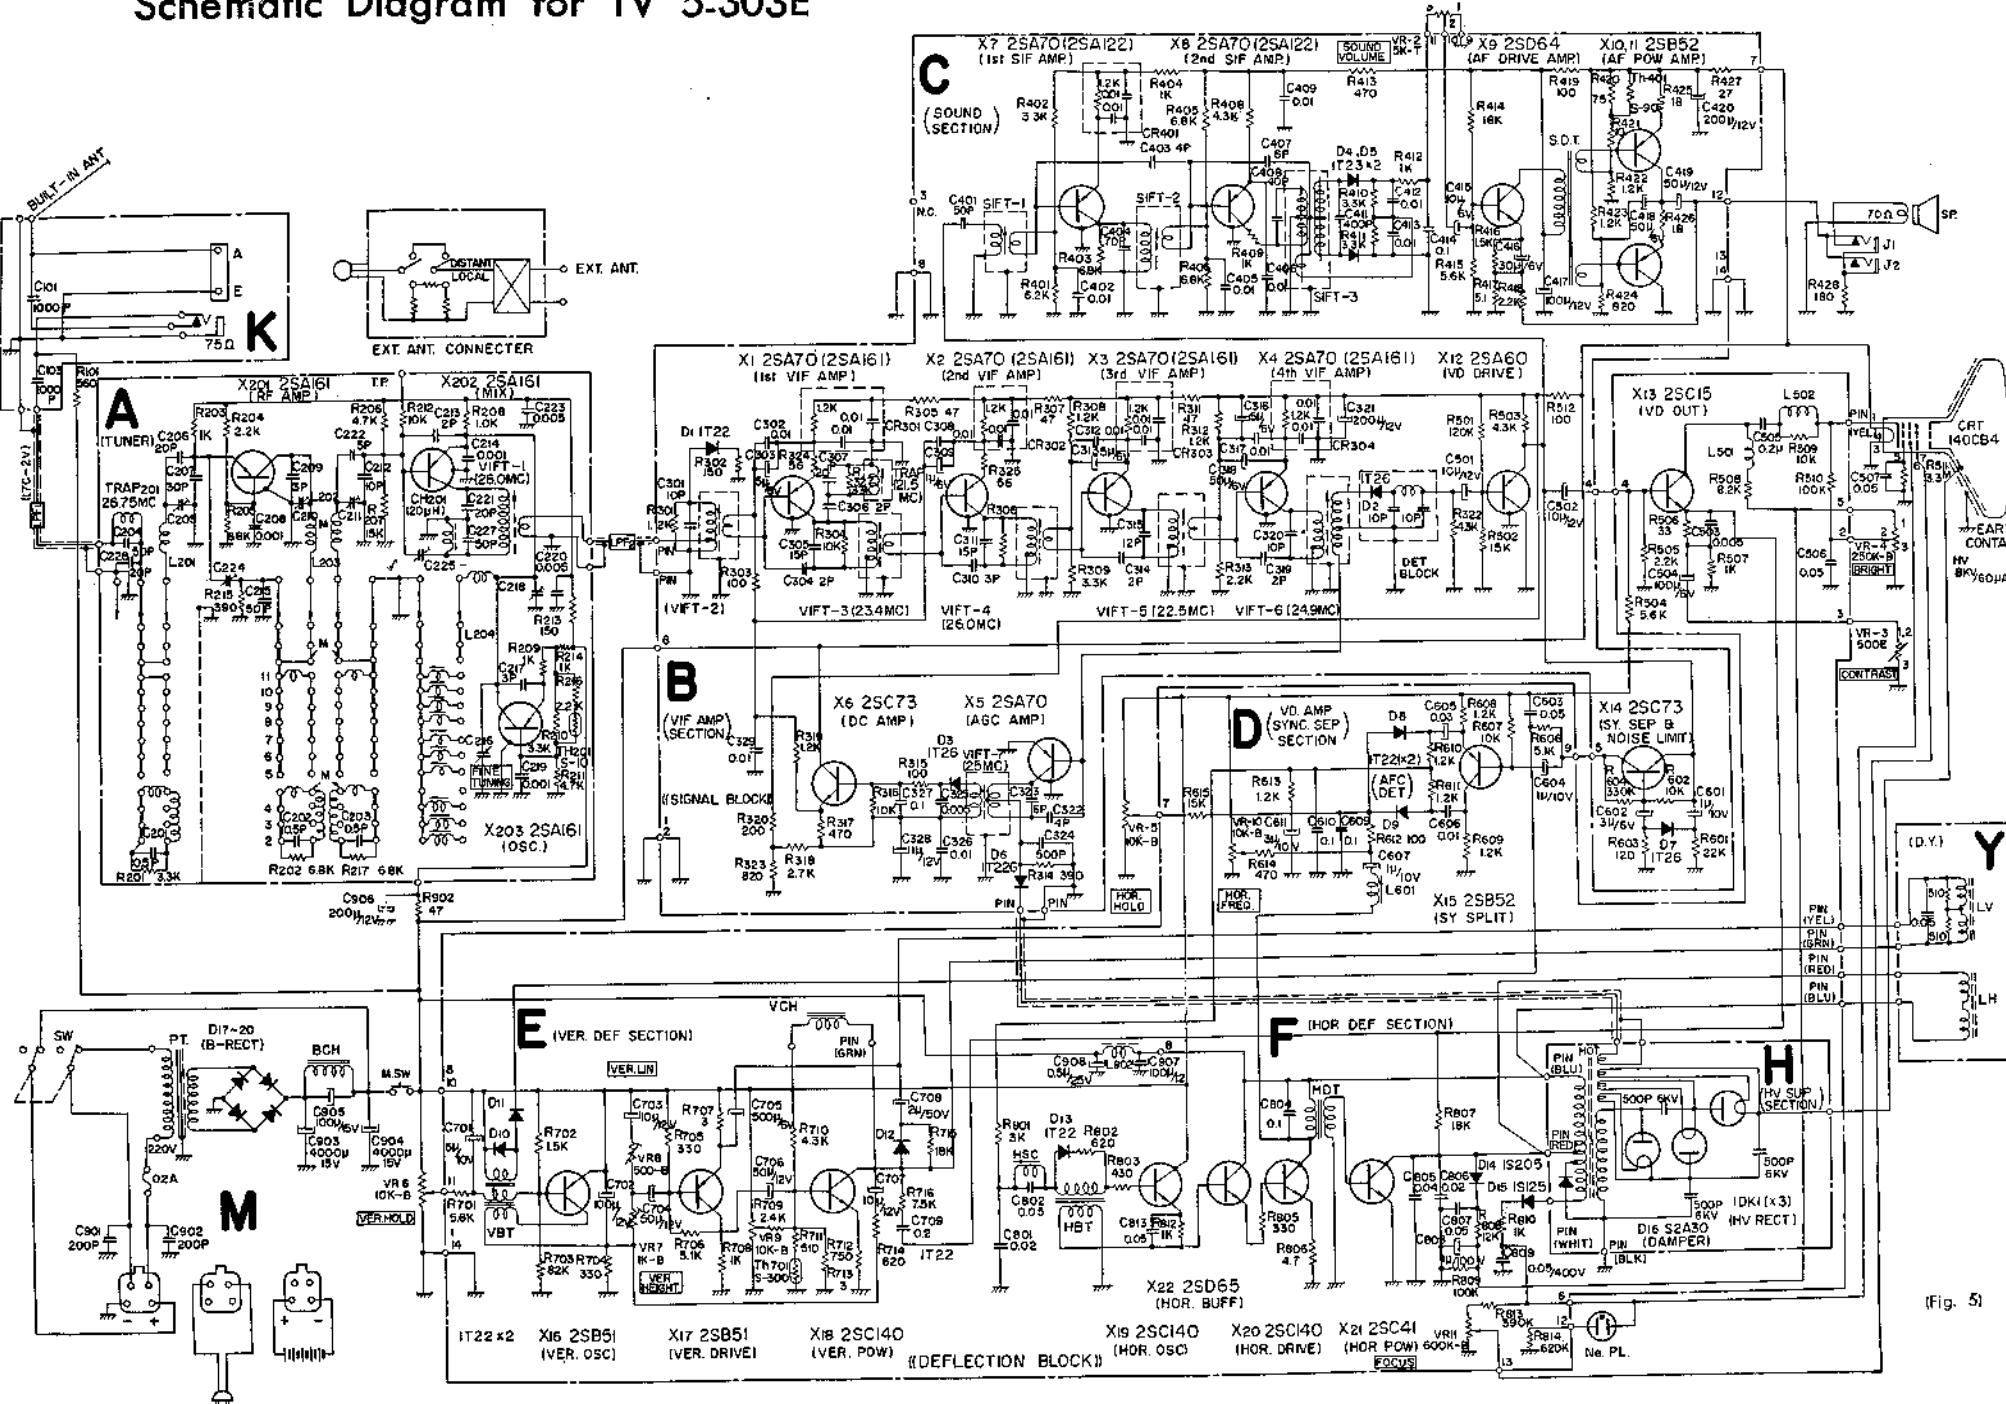

(Fig.


△ To be adjusted and value may differ from that indicated.

* Used in some set for adjustment purpose

NOTE: Refer to pages 10 and 11 for value of the circuit constant.

Voltage Distribution Chart


— Sound Circuit —

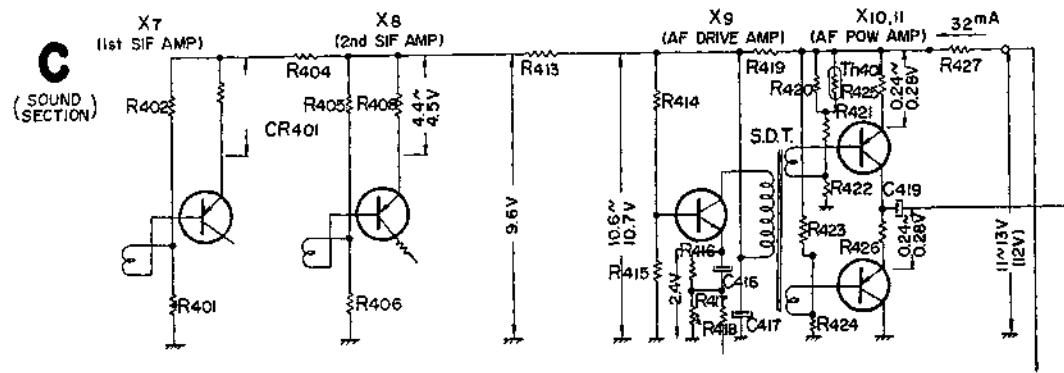

[Fig. 6]


Voltage Distribution Chart

— SYNC SPLIT Circuit —

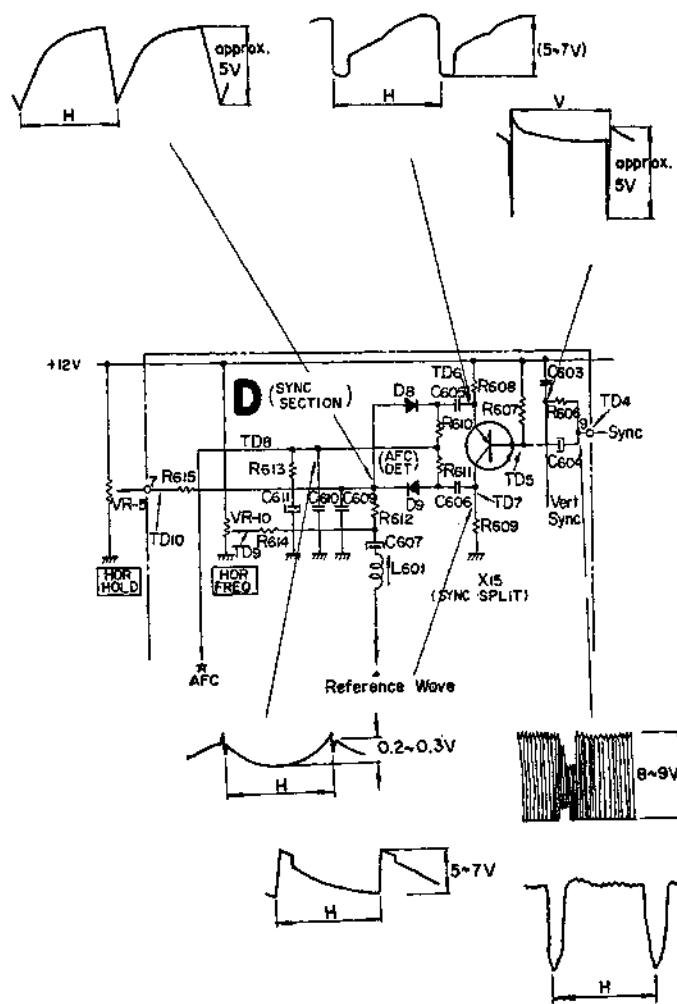

Voltage Distribution Chart

— HOR DEF Circuit —

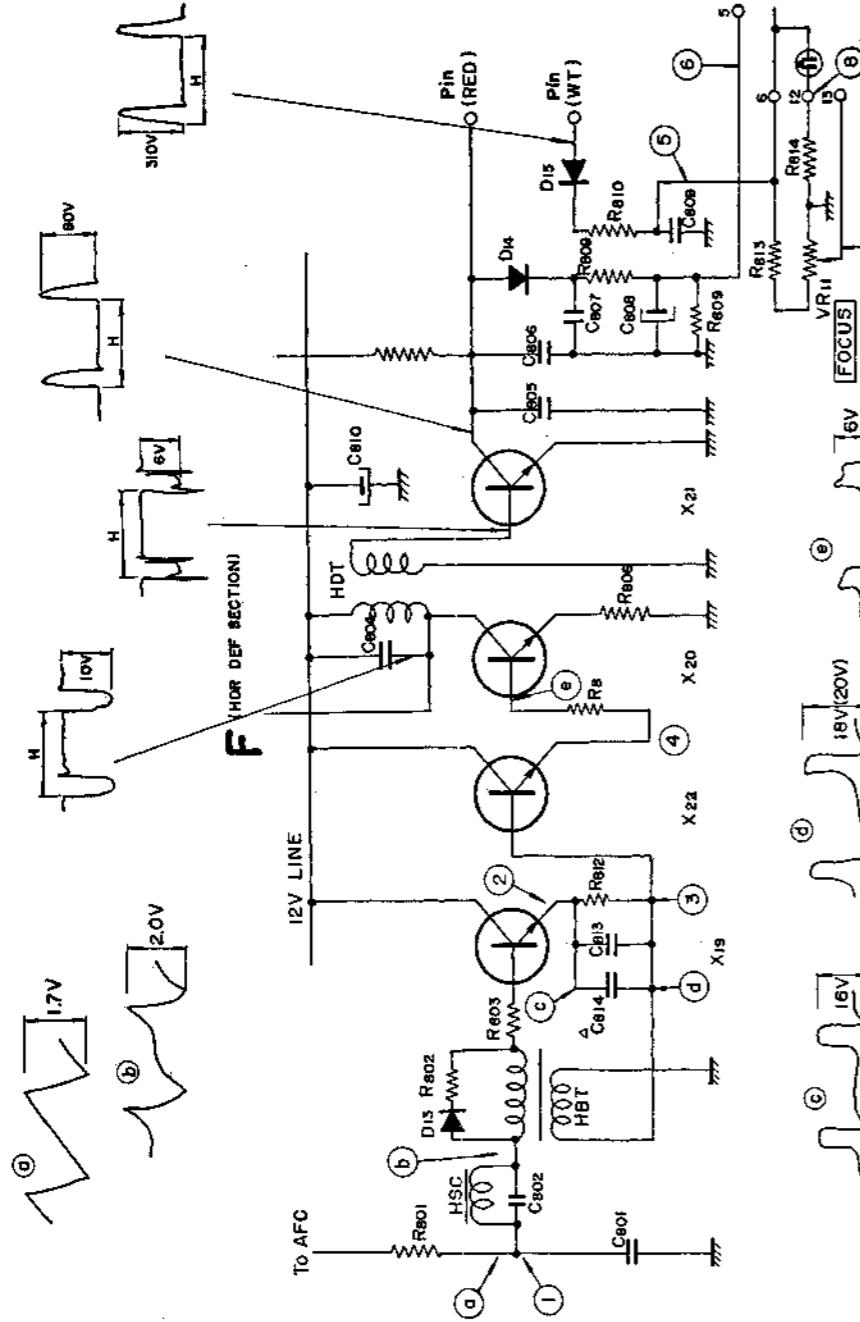

REMARKS FOR THE ELECTRICAL PARTS LIST ON PAGE 10 & 11.

- | | |
|-----------------------|-----------------------------|
| Parts No. of Resistor | 1—201— Composition Resistor |
| | 1—203— Carbon Resistor |
| | 1—207— Wire Wound Resistor |

(Fig. 11)

DC Voltage : ①...2.1V, ②...2.7V, ③...0.02V, ④...1.7V
⑤...290V, ⑥...50V, ⑦...50~100V, ⑧...230V

Electrical Parts List (A) for TV 5-303E

(Refer to the REMARKS on page 9)

Part No.	Symbol	Description	Part No.	Symbol	Description
1-221-276-11	VR ₂	Potentiometer	1-201-133-00	R ₄₀₀	1 KΩ RC1/8L
-275-11	VR ₃	Volume Control 5 KΩ-T	1-203-373-00	R ₄₁₀	3.3 KΩ RD1/8L
-285-11	VR ₄	Contrast Control 500 Ω-E	-373-00	R ₄₁₁	3.3 KΩ "
-297-11	VR ₅	Brightness Control 250 KΩ-B	-367-00	R ₄₁₂	1 KΩ "
-297-11	VR ₆	Horizontal Hold Control 10 KΩ-B	-361-00	R ₄₁₃	470 Ω "
-335-00	VR ₇	Vertical Hold Control 10 KΩ-B	-385-00	R ₄₁₄	18 KΩ "
-326-00	VR ₈	Vertical Height Control 1 KΩ-B	-378-00	R ₄₁₅	5.6 KΩ "
-327-00	VR ₉	Vertical Linearity Control 500 Ω-B	-405-00	R ₄₁₆	1.5 KΩ "
-327-00	VR ₁₀	Vertical Bias Control 10 KΩ-B	-351-00	R ₄₁₇	5.1 Ω "
		Horizontal Frequency Control 10 KΩ-B	-370-00	R ₄₁₈	2.2 KΩ "
		Focus Control 600 KΩ-B	-011-00	R ₄₁₉	100 Ω RD1/4L
1-221-351-00	VR ₁₁	Encapsulated Component	-356-00	R ₄₂₀	75 Ω RD1/8RL
1-101-406-01	CR ₃₀₁	1.2 KΩ, 0.01 μF, 0.01 μF	-315-00	R ₄₂₁	10 Ω "
-406-01	CR ₃₀₂	"	-368-00	R ₄₂₂	1.2 KΩ RD1/8RL
-406-01	CR ₃₀₃	"	-368-00	R ₄₂₃	820 Ω "
-406-01	CR ₃₀₄	"	-308-00	R ₄₂₄	18 Ω "
-406-01	CR ₄₀₁	"	-308-00	R ₄₂₅	18 Ω "
			-006-00	R ₄₂₆	27 Ω RD1/4L
1-201-454-11	R ₁₀₁	560 Ω RC1/4L	-334-00	R ₄₂₇	180 Ω "
1-203-095-00	R ₁₀₂	27 KΩ RD1/4L			
1-203-187-00	R ₂₀₁	6.8 KΩ RD1/16L	-400-00	R ₅₀₁	120 KΩ RD1/8RL
-187-00	R ₂₀₂	6.8 KΩ "	-386-00	R ₅₀₂	15 KΩ "
-182-00	R ₂₀₃	1 KΩ "	-375-00	R ₅₀₃	4.3 KΩ "
-184-00	R ₂₀₄	2.2 KΩ "	-377-00	R ₅₀₄	5.1 KΩ "
-187-00	R ₂₀₅	6.8 KΩ RD1/16L	-370-00	R ₅₀₅	2.2 KΩ "
-185-00	R ₂₀₆	4.7 KΩ "	-354-00	R ₅₀₆	33 Ω "
-192-00	R ₂₀₇	15 KΩ "	-367-00	R ₅₀₇	1 KΩ "
-182-00	R ₂₀₈	1 KΩ "	-408-00	R ₅₀₈	8.2 KΩ "
-421-00	R ₂₀₉	1 KΩ RD1/16L	-383-00	R ₅₀₉	10 KΩ "
-425-00	R ₂₁₀	3.3 KΩ RD1/16L	-100-00	R ₅₁₀	100 KΩ RD1/4L
-185-00	R ₂₁₁	4.7 KΩ "	1-201-596-00	R ₅₁₁	3.3 MΩ RC1/2L
-190-00	R ₂₁₂	10 KΩ "	1-203-011-00	R ₅₁₂	100 Ω RD1/4RL
1-201-160-00	R ₂₁₃	42 Ω RC1/10L	-387-00	R ₆₀₁	22 KΩ RD1/8L
1-203-181-00	R ₂₁₄	390 Ω RD1/16L	-383-00	R ₆₀₂	10 KΩ "
-181-00	R ₂₁₅	390 Ω "	-759-00	R ₆₀₃	120 KΩ "
-339-00	R ₂₁₆	1.8 KΩ RD1/16L	-411-00	R ₆₀₄	330 KΩ "
-187-00	R ₂₁₇	6.8 KΩ RD1/16L	1-203-377-00	R ₆₀₅	5.1 KΩ RD1/8RL
-185-00	R ₂₁₈	4.7 KΩ "	-383-00	R ₆₀₆	10 KΩ "
1-201-457-00	R ₃₀₁	1.2 KΩ RC1/8L	-368-00	R ₆₀₇	1.2 KΩ "
1-203-145-00	R ₃₀₂	150 Ω RD1/8RL	-368-00	R ₆₀₈	1.2 KΩ "
-357-00	R ₃₀₃	100 Ω "	-368-00	R ₆₀₉	1.2 KΩ "
1-201-123-00	R ₃₀₄	6.8 KΩ RC1/8L	-368-00	R ₆₁₀	1.2 KΩ "
1-203-414-00	R ₃₀₅	47 Ω RD1/8RL	-357-00	R ₆₁₁	100 Ω "
1-201-108-00	R ₃₀₆	10 KΩ RC1/8L	-368-00	R ₆₁₂	1.2 KΩ RD1/8RL
1-203-414-00	R ₃₀₇	47 Ω RD1/8RL	-561-00	R ₆₁₃	470 Ω "
-368-00	R ₃₀₈	1.2 KΩ "	-387-00	R ₆₁₄	22 KΩ "
-373-00	R ₃₀₉	3.3 KΩ "	-385-00	R ₆₁₅	15 KΩ "
1-203-414-00	R ₃₁₀	47 Ω RD1/8RL	-378-00	R ₇₀₁	5.6 KΩ "
-368-00	R ₃₁₁	1.2 KΩ "	-405-00	R ₇₀₂	1.5 KΩ "
-370-00	R ₃₁₂	2.2 KΩ "	-397-00	R ₇₀₃	82 KΩ "
-412-00	R ₃₁₃	390 Ω "	-360-00	R ₇₀₄	330 Ω "
-357-00	R ₃₁₄	100 Ω "	-360-00	R ₇₀₅	330 Ω "
-383-00	R ₃₁₅	10 KΩ "	-377-00	R ₇₀₆	5.1 KΩ "
-361-00	R ₃₁₆	470 Ω RD1/8RL	1-207-018-00	R ₇₀₇	3 Ω RW1/4RL
-372-00	R ₃₁₇	2.7 KΩ "	-778-00	R ₇₀₈	1 KΩ RD1/8RL
-368-00	R ₃₁₈	1.2 KΩ "	-375-00	R ₇₀₉	2.4 KΩ "
-404-00	R ₃₁₉	200 Ω "	-316-00	R ₇₁₀	4.3 KΩ "
1-201-122-00	R ₃₂₀	33 KΩ RD1/16L	-335-00	R ₇₁₁	510 Ω "
1-203-366-00	R ₃₂₁	4.3 KΩ RC1/8L	-443-00	R ₇₁₂	750 Ω "
1-201-128-00	R ₃₂₂	820 Ω RD1/8RL	1-207-018-00	R ₇₁₃	3 Ω RW1/4RL
-128-00	R ₃₂₃	33 Ω RC1/8L	1-203-857-00	R ₇₁₄	620 Ω RD1/8RL
-128-00	R ₃₂₄	33 Ω "	1-201-147-00	R ₇₁₅	18 KΩ RC1/8L
-128-00	R ₃₂₅	33 Ω "	1-203-382-00	R ₇₁₆	7.5 KΩ RD1/8RL
1-203-884-00	R ₃₂₆	33 KΩ RD1/16L	-443-00	R ₈₀₁	3 KΩ RD1/8RL
-380-00	R ₄₀₁	6.2 KΩ RD1/8RL	-857-00	R ₈₀₂	620 Ω "
-373-00	R ₄₀₂	3.3 KΩ "	-760-00	R ₈₀₃	430 Ω "
1-201-123-00	R ₄₀₃	6.8 KΩ RC1/8L	1-203-360-00	R ₈₀₄	330 Ω RD1/8RL
1-203-367-00	R ₄₀₄	1 KΩ RD1/8RL	1-207-022-00	R ₈₀₅	5.6 Ω RW1/4RL
-381-00	R ₄₀₅	6.8 KΩ "	1-203-386-00	R ₈₀₆	18 KΩ RD1/8RL
-381-00	R ₄₀₆	6.8 KΩ "	-384-00	R ₈₀₇	12 KΩ "
1-203-375-00	R ₄₀₇	4.3 KΩ RD1/8RL	-399-00	R ₈₀₈	100 KΩ "

—continued—

Part No.	Symbol	Description	Part No.	Symbol	Description
1-203-031-00	R ₈₁₀	1 KΩ RD1/4L	1-101-004-01	C ₄₀₅	0.01 μF Ceramic
	R ₈₁₁		-004-01	C ₄₀₆	0.01 μF "
1-203-367-00	R ₈₁₂	1 KΩ RD1/8RL	-085-01	C ₄₀₇	6 PF "
-867-00	R ₈₁₃	390 KΩ "	-129-01	C ₄₀₈	40 PF "
-868-00	R ₈₁₄	620 KΩ "	-004-01	C ₄₀₉	0.01 μF "
1-201-455-11	R ₉₀₁	1.5 MΩ RC1/2L			—deleted—
1-203-148-00	R ₉₀₂	47 Ω RD1/4L	1-103-023-11	C ₄₁₀	400 PF Styrol
1-201-455-11	R ₉₀₃	1.5 MΩ RC1/2L	1-101-118-01	C ₄₁₁	0.01 μF Ceramic
	R ₉₀₄	Capacitor	-118-01	C ₄₁₂	0.01 μF "
1-101-001-01	C ₁₀₁	0.001 μF Ceramic	-084-01	C ₄₁₃	0.1 μF "
	C ₁₀₂	—deleted—	1-121-104-01	C ₄₁₄	10 μF 6 WV Electrolytic
1-101-001-01	C ₁₀₃	0.001 μF Ceramic	-102-01	C ₄₁₅	30 μF "
	C ₂₀₁	—deleted—	-120-01	C ₄₁₆	100 μF 12 WV "
1-101-076-00	C ₂₀₂	0.5 PF Ceramic	-128-01	C ₄₁₇	50 μF 6 WV "
-076-00	C ₂₀₃	0.5 PF "	-122-01	C ₄₁₈	50 μF 12 WV "
-041-00	C ₂₀₄	50 PF "	-121-01	C ₄₁₉	200 μF 12 WV "
1-141-055-00	C ₂₀₅	Cylindrical Trimmer Capacitor			
-055-00	C ₂₁₀	" " "	1-121-118-01	C ₅₀₁	10 μF 12WV Electrolytic
-055-00	C ₂₁₁	" " "	-118-01	C ₅₀₂	10 μF "
-055-00	C ₂₁₂	" " "	1-105-033-00	C ₅₀₃	0.005 μF Mylar (MFL)
-055-00	C ₂₁₃	" " "	1-121-155-01	C ₅₀₄	100 μF 6 WV Electrolytic
-055-00	C ₂₁₄	" " "	1-105-077-00	C ₅₀₅	0.2 μF Mylar (MFL)
-055-00	C ₂₁₅	" " "	-035-00	C ₅₀₆	0.05 μF "
1-101-039-00	C ₂₀₆	10 PF Ceramic	-036-00	C ₅₀₇	0.05 μF "
-040-00	C ₂₀₇	20 PF "	1-127-904-00	C ₆₀₁	1 μF 10 WV Electrolytic (Alox)
-043-00	C ₂₀₈	0.001 μF "		C ₆₀₂	3 μF 6 WV "
-036-00	C ₂₀₉	3 PF "	1-105-035-00	C ₆₀₃	0.05 μF Mylar (MFL)
-039-00	C ₂₁₀	10 PF "	1-127-906-00	C ₆₀₄	1 μF 10 WV Electrolytic (Alox)
-035-00	C ₂₁₁	2 PF "	1-105-018-00	C ₆₀₅	0.03 μF Mylar (MFL)
-043-00	C ₂₁₂	0.001 μF "		C ₆₀₆	0.01 μF "
-041-00	C ₂₁₃	50 PF "	1-127-906-00	C ₆₀₇	1 μF 10 WV Electrolytic (Alox)
1-141-054-00	C ₂₁₄	Cylindrical Trimmer Capacitor (Fine Tuning)		C ₆₀₈	—deleted—
	C ₂₁₅		1-105-076-00	C ₆₀₉	0.1 μF Mylar (MFL)
1-101-067-00	C ₂₁₇	3 PF Ceramic	-076-00	C ₆₁₀	0.1 μF "
-043-00	C ₂₁₈	0.001 μF "	1-127-908-00	C ₆₁₁	3 μF 10 WV Electrolytic (Alox)
-044-00	C ₂₁₉				
-040-00	C ₂₂₀				
-038-00	C ₂₂₁				
-020-00	C ₂₂₂	5 PF "	1-127-905-01	C ₇₀₁	5 μF 10 WV Electrolytic (Alox)
	C ₂₂₃	0.005 μF "	1-121-141-05	C ₇₀₂	100 μF 12 WV Electrolytic
	C ₂₂₄	—deleted—		C ₇₀₃	10 μF "
1-101-041-00	C ₂₂₅	50 PF Ceramic	-118-01	C ₇₀₄	50 μF "
	C ₂₂₆		-122-00	C ₇₀₅	500 μF 6 WV "
	C ₂₂₇		-161-05	C ₇₀₆	50 μF 12 WV "
-645-00	C ₈₀₁	10 PF Ceramic	-164-00	C ₇₀₇	10 μF "
-004-01	C ₈₀₂	0.01 μF "	-136-00	C ₇₀₈	2 μF 50 WV "
1-121-106-01	C ₈₀₃	5 μF 6 WV Electrolytic	1-105-037-00	C ₇₀₉	0.2 μF Mylar (MFL)
1-101-046-01	C ₈₀₄	2 PF Ceramic			
-114-01	C ₈₀₅	15 PF "	1-105-034-00	C ₈₀₁	0.02 μF Mylar (MFL)
-046-01	C ₈₀₆	2 PF "		C ₈₀₂	0.05 μF "
-111-00	C ₈₀₇	20 PF "	-035-00	C ₈₀₈	—deleted—
-004-01	C ₈₀₈	0.01 μF "	1-105-076-00	C ₈₀₄	0.1 μF Mylar (MFL)
1-121-145-01	C ₈₀₉	1 μF 6 WV Electrolytic	1-113-112-00	C ₈₀₅	0.04 μF PS
1-101-036-01	C ₈₁₀	3 PF Ceramic	-107-00	C ₈₀₆	0.02 μF "
-114-00	C ₈₁₁	15 PF "	1-105-035-00	C ₈₀₇	0.05 μF Mylar (MFL)
-004-01	C ₈₁₂	0.001 μF "	1-121-148-01	C ₈₀₈	1 μF 100 WV Electrolytic
1-121-106-01	C ₈₁₃	5 μF 6 WV Electrolytic	1-115-046-00	C ₈₀₉	0.05 μF 400 WV Oil
1-101-046-01	C ₈₁₄	2 PF Ceramic		C ₈₁₀	—deleted—
-649-01	C ₈₁₅	12 PF "		C ₈₁₁	—deleted—
1-121-106-01	C ₈₁₆	5 μF 6 WV Electrolytic		C ₈₁₂	—deleted—
1-101-004-01	C ₈₁₇	0.01 μF Ceramic	1-105-035-00	C ₈₁₃	0.05 μF Mylar (MFL)
1-121-128-01	C ₈₁₈	50 μF 6 WV Electrolytic	-063-00	C ₈₁₄	0.01 μF "
1-101-046-01	C ₈₁₉	2 PF Ceramic	1-109-010-00	C ₉₀₁	200 PF Mica
-645-00	C ₈₂₀	10 PF "		C ₉₀₂	200 PF "
1-121-121-01	C ₈₂₁	200 μF 12 WV Electrolytic	1-119-071-05	C ₉₀₃	4000 μF 15 WV Electrolytic
1-101-069-01	C ₈₂₂	4 PF Ceramic	-071-05	C ₉₀₄	4000 μF "
1-103-096-00	C ₈₂₃	6 PF Styrol	-101-05	C ₉₀₅	100 μF 12 WV "
1-101-424-00	C ₈₂₄	500 PF Ceramic	1-119-043-05	C ₉₀₆	200 μF "
-058-01	C ₈₂₅	0.005 μF "	1-131-002-11	C ₉₀₇	50 μF "
-004-01	C ₈₂₆	0.01 μF "	1-127-909-11	C ₉₀₈	0.5 μF 25 WV "
-086-01	C ₈₂₇	0.1 μF "			(Tantalum)
1-121-116-01	C ₈₂₈	1 μF 12 WV Electrolytic		X ₂₀₁	2SA161 (RF AMP)
1-101-004-01	C ₈₂₉	0.01 μF Ceramic		X ₂₀₂	2SA161 (MIX)
-112-01	C ₈₃₀	50 PF Ceramic		X ₂₀₃	2SA161 (OSC)
-004-01	C ₈₃₁	0.01 μF "		X ₁	2SA70 (1st VIF AMP)
-069-01	C ₈₃₂	4 PF "		X ₂	2SA70 (2nd VIF AMP)
-319-01	C ₈₃₃	0 PF "		X ₃	2SA70 (3rd VIF AMP)
	C ₈₃₄			X ₄	2SA70 (4th VIF AMP)

—continued—

Part No.	Symbol	Description	Part No.	Symbol	Description
	X ₅	2SA70 (AGC AMP)	1-800-001-00	Th ₂₀₁	Thermistor
	X ₆	2SC73 (DC AMP)	8-860-003-00	Th ₁₀₁	S-10
	X ₇	2SA70 (1st SIF AMP)	-005-00	Th ₇₀₁	S-90
	X ₈	2SA70 (2nd SIF AMP)			S-300
	X ₉	2SD64 (AF DRIVE AMP)	1-525-039-00		HV Rectifier
	X ₁₀	2SB52 (AF POWER AMP)			IDK1
	X ₁₁	2SB52 (VIF DRIVE)			Coil and Transformers
	X ₁₂	2SC15 (VIF OUT)	1-403-401-00	VIFT ₁	Video IF Transformer
	X ₁₃	2SC73 (SYNC SEP. AMP, NOISE LIMIT)	-426-11	VIFT ₂	"
	X ₁₄	2SA60 (VIF DRIVE)	-424-02	VIFT ₃	"
	X ₁₅	2SB52 (SYNC SPLIT)	-425-02	VIFT ₄	"
	X ₁₆	2SB51 (VERT OSC)	-417-02	VIFT ₅	"
	X ₁₇	2SB51 (VERT DRIVE)	-418-02	VIFT ₆	"
	X ₁₈	2SC140 (VERT POWER)	-306-02	SIFT ₁	Sound IF Transformer
	X ₁₉	2SC140 (HOR OSC)	-310-02	SIFT ₂	"
	X ₂₀	2SC140 (HOR DRIVE)	-048-02	SIFT ₃	IF Transformer for FM Detector
	X ₂₁	2SC41 (HOR POWER)	X-44012-54-0	L ₂₀₁₋₂₀₄	Tuner Rotary Coil
	X ₂₂	2SD65 (HOR BUFFER)	1-409-001-00	Trap ₂₀₁	Video IF Trap Coil
	D ₁	Diode	1-407-001-00	CH ₂₀₁	IF Choke Coil
	D ₂		1-403-420-00	Trap ₁	Sound Signal Trap
	D ₃			DET	Video Detector Block

—continued—

Part No.	Description		Q'ty	Part No.	Description		Q'ty				
C. Wires and Miscellaneous (Minimum Q'ty for Ordering : Meter)											
Main Block											
P. V. C. Wires											
12/0.18	1.5φ	Red			Two Conductor Cable (Shielded) 7/0.12×2						
" "	"	Orange			Tinned Copper Wire						
" "	"	Yellow			0.6φ						
" "	"	Green			1.0φ						
" "	"	Blue			Braided Wire						
" "	"	Gray			16/14/0.08						
" "	"	White			High Voltage Block & Deflection Block						
" "	"	Purple			P. V. C. Wires						
" "	"	Black			0.6φ Yellow						
" "	"	Brown			16/0.12 Black						
20/0.18	2.0φ	Black			20/0.18 Black						
" "	"	Brown			12/0.18 (Polyethylene)						
" "	"	Red			Thermo Contracting Plastic Tube						
" "	"	Gray			Gray						
" "	"	White			Video & Sound Signal Block						
P. V. C. Wire					P. V. C. Wire						
16/0.12	1.6φ	Black			16/0.12 1.6φ Black						
					Two Conductor Cable 7/0.12×2						

Part No.	Description		Q'ty	Part No.	Description		Q'ty
Y-44012-55-1	Tuner Block		1	X-40029-62-1	Deflection Block (Mounted Circuit Board)		1
X-40029-61-1	Video & Sound Signal Block (Mounted Circuit Board)		1	1-453-001-01	High Voltage Block		1
				1-451-003-00	Deflection Yoke		1

Mechanical Parts List for TV 5-303E

Part No.	Description		Q'ty	Part No.	Description		Q'ty				
A. General											
Cabinet & Appearance Items											
X-40026-02-0	Cabinet (Front) Assembly, including Cabinet (Front)		1	X-40026-04-8	Cabinet (Back) Assembly		1				
4-002-603-02	Picture Tube Mask	(1)		4-002-795-03	Case Label		1				
-604-01	Picture Tube Protector	(1)		-714-00	Telescopic Antenna Catch		1				
-765-01	Antenna Bushing	(1)		X-40026-05-0	Carrying Handle Assembly, including Carrying Handle		1				
-611-00	Dust-Proof Rubber	(1)		4-002-620-01	Ornamental Leather for Handle	(2)					
-781-00	Spacer (Upper) for Picture Tube	(1)		-622-00	Carrying Handle Holding Screw	(2)					
-782-00	Spacer (Lower) for Picture Tube	(1)		X-40026-06-2	Table Stand Assembly		1				
-783-00	Deflection Yoke Spacer	(1)		733-00	Rubber Foot	2					
X-40026-50-0	Picture Tube Clamp Assembly, including Picture Tube Clamp	(1)		X-40026-43-0	Channel Selector Knob Assembly		1				
4-002-778-00	Picture Tube Fixing Bracket	(2)		X-40026-10-2	Fine Tuning Knob Assembly		1				
-779-00	Grounding Metal for Picture Tube	(1)		4-002-635-00	Volume Control Knob Assembly		1				
-780-00	Telescopic Antenna Assembly, including Telescopic Antenna Holding Bracket	(1)			Control Knob (Hor. Hold, Brightness, Contrast)	3					
X-40026-41-1	Telescopic Antenna Connecting Lug	(1)			Vertical Hold Control Knob	1					
4-002-716-00	Compressed Fiber Washer for Telescopic Antenna	(1)			" SONY " Badge	1					
-718-00	Telescopic Antenna Bottom Insulator	(1)		X-40026-14-4	Control Panel	1					
-715-00	Telescopic Antenna Holding Nut	(1)			Main Block						
-717-00	Lock Nut for Telescopic Antenna	(1)			Chassis Assembly	1					
-727-00	Lock Washer (5φ) for Telescopic Antenna	(1)			Speaker Holding Plate Assembly, including Speaker Holding Plate	1					
-728-00	Telescopic Antenna Tip	(1)		4-002-644-04	Earphone Jack Plate	(1)					
7-623-412-01				-646-01	Multi-Jack Holding Bracket	(2)					
				-647-00	Adjustable Clamp for Electrolytic Capacitor	(1)					
				-648-01	4 Pole Plug Mounting Bracket Assembly	1					
					Micro-Switch Contacting Pin	1					

— 13 —

—continued—

Part No.	Description		Q'ty	Part No.	Description		Q'ty
Spring Washer							
4-002-674-00	Micro-Switch Mounting Plate		1	7-623-210-22	4φ (for Carrying Handle)		2
-649-00	Neon Lamp Holder		1		Nut	2.6φ (for Table Stand)	2
X-40026-66-0	Video & Sound Signal Block		1	7-622-307-02			
	Shield Plate Assembly				Main Block		
X-40026-01-0	Deflection Block		1		Screw		
	Deflection Circuit Board Assembly, including			7-621-561-42	(+K 3φ×6 (for Power Transformer)		
4-002-680-01	(AI)			-32	(+K 3φ×5 (for 4 Pole Plug)		
-681-01	Heat Sink for Hor. Power Transistor (A)			-259-62	(+P 2.6φ×10 (for Earphone)		
-682-02	Heat Sink for Hor. Power Transistor (B)			-261-32	(+P 3φ×5 (for Multi-Jack, 4 Pole		
	Heat Sink for Vert. Power Transistor (A)				Plug, Speaker, High		
-683-00	Heat Sink for Vert. Power Transistor (B)				Voltage Block, Power		
	Insulator for Heat Sink (Vert.)			-42	Switch)	14	
-684-00	Spacer for Heat Sink			-12	(+P 3φ×6 (for Power Transformer)		
-685-00	Black Sheet on Deflection Circuit Board			-22	(+P 3φ×3 (for Neon Lamp Holder)		
-686-01				-62	(+P 3φ×4 (Adjustable Clamp for Electrolytic Capacitor)		
					(+P 3φ×10 (for Adjustable Clamp for Electrolytic Capacitor)		
X-44900-01-0	Accessory						
	Polyethylene Bag for Silicone Cloth		1	-111-42	(—R 3φ×6 (for Tuner)		
4-002-766-00	Carrying Bag		1	-361-32	(—F 3φ×5 (for Chassis Mask)		
-775-00	Carton for Carrying Bag		1	4-002-737-00	(+P 3φ×23 (for Selenium Rectifier		
-771-00	Foam Cushion for Carrying Bag		1				
-772-00	Styro-Foam Cushion (Back)		1		Lock Washer		
-773-00	" " (Bottom)		1	7-623-408-01	3φ (for Selenium Rectifier & Tuner)	7	
-774-00	" " (Front)		1				
-769-00	Polyethylene Bag		1		Spring Washer		
-770-00	Polyethylene Bag for Carrying Bag		1	7-623-207-12	2.6φ (for Earphone)	2	
-667-00	Accessory Case		1		Washer		
4-495-008-53	Instruction Manual		1	4-002-785-00	3φ (for Video & Sound Signal Circuit Board)	1	
4-002-796-50	Caution Card		1				
					Nut		
					2.6φ (for Earphone)	2	
					Deflection Block		
					Screws		
					7-621-261-52	(+P 3φ×8 (for Transistor)	
					-255-52	(+P 2φ×8 (for Transistor)	
					-555-32	(+P 2φ×6 (for Heat Sink)	
					-555-26	(+K 2φ×5 (for Deflection Circuit Board)	3
					-36	(+K 2φ×4 (for Table Stand)	
					-561-52	(+K 2φ×8 (for Picture Tube Clamp)	
					-555-22	(+K 2φ×4 (for Table Stand)	
					-561-23	(+K 3φ×4 (for Telescopic Antenna Holding Bracket)	
					-555-38	(+K 2φ×5 (for Control Panel)	
					-261-36	(+P 3φ×5 (for Cabinet (Back))	
					-259-38	(+P 2.6φ×5 (for Table Stand, Cabinet (Back))	
					-262-22	(+P 3φ×20 (for Picture Tube Clamp)	
					-255-48	(+P 2φ×6 (for Table Stand Cushion)	
					-770-28	(+B 2φ×5 (for Control Panel)	
					4-002-741-00	(+P 4φ×7 (for Carrying Handle)	
							1


Sony Corporation

© 1968


9-962-063-81

78B0403-3
Printed in Japan

Schematic Diagram for Power Supply Block

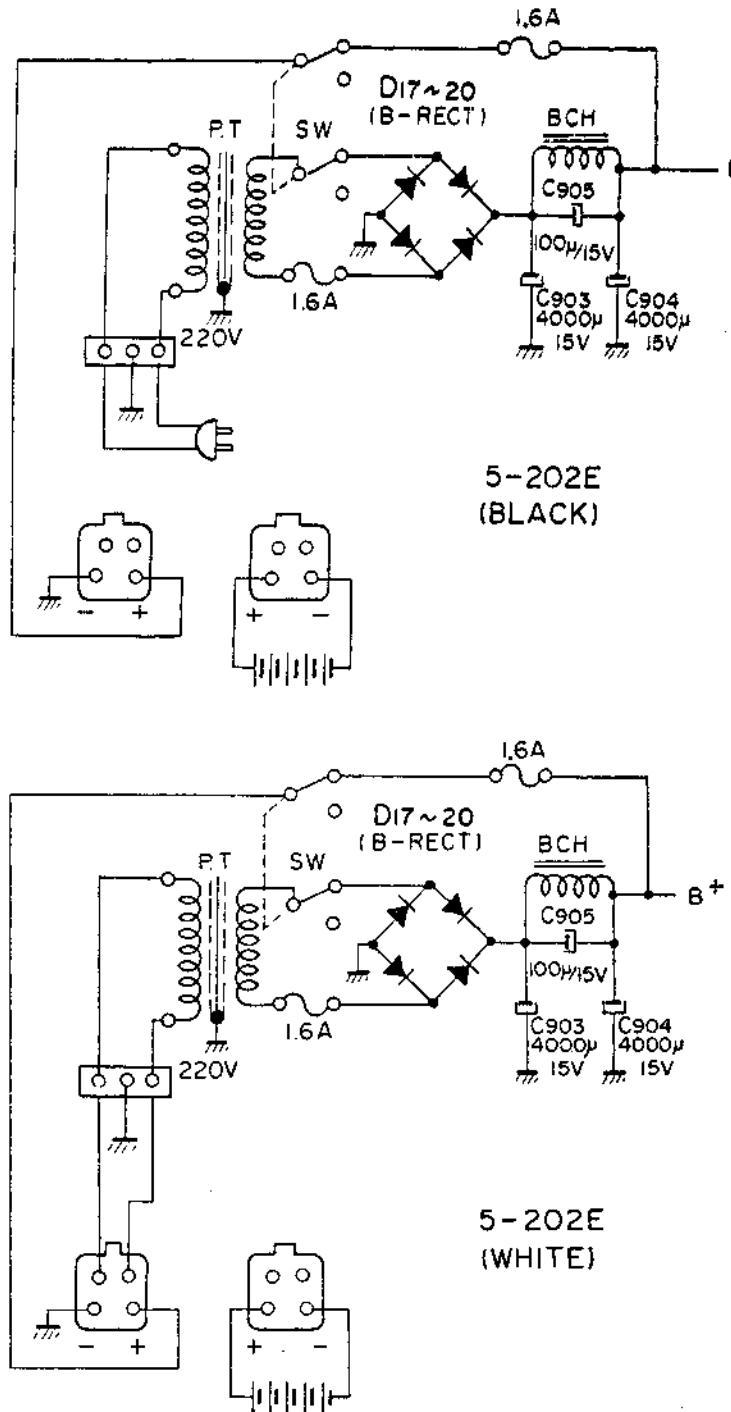

SONY 5-202E CIRCUIT SCHEMATIC

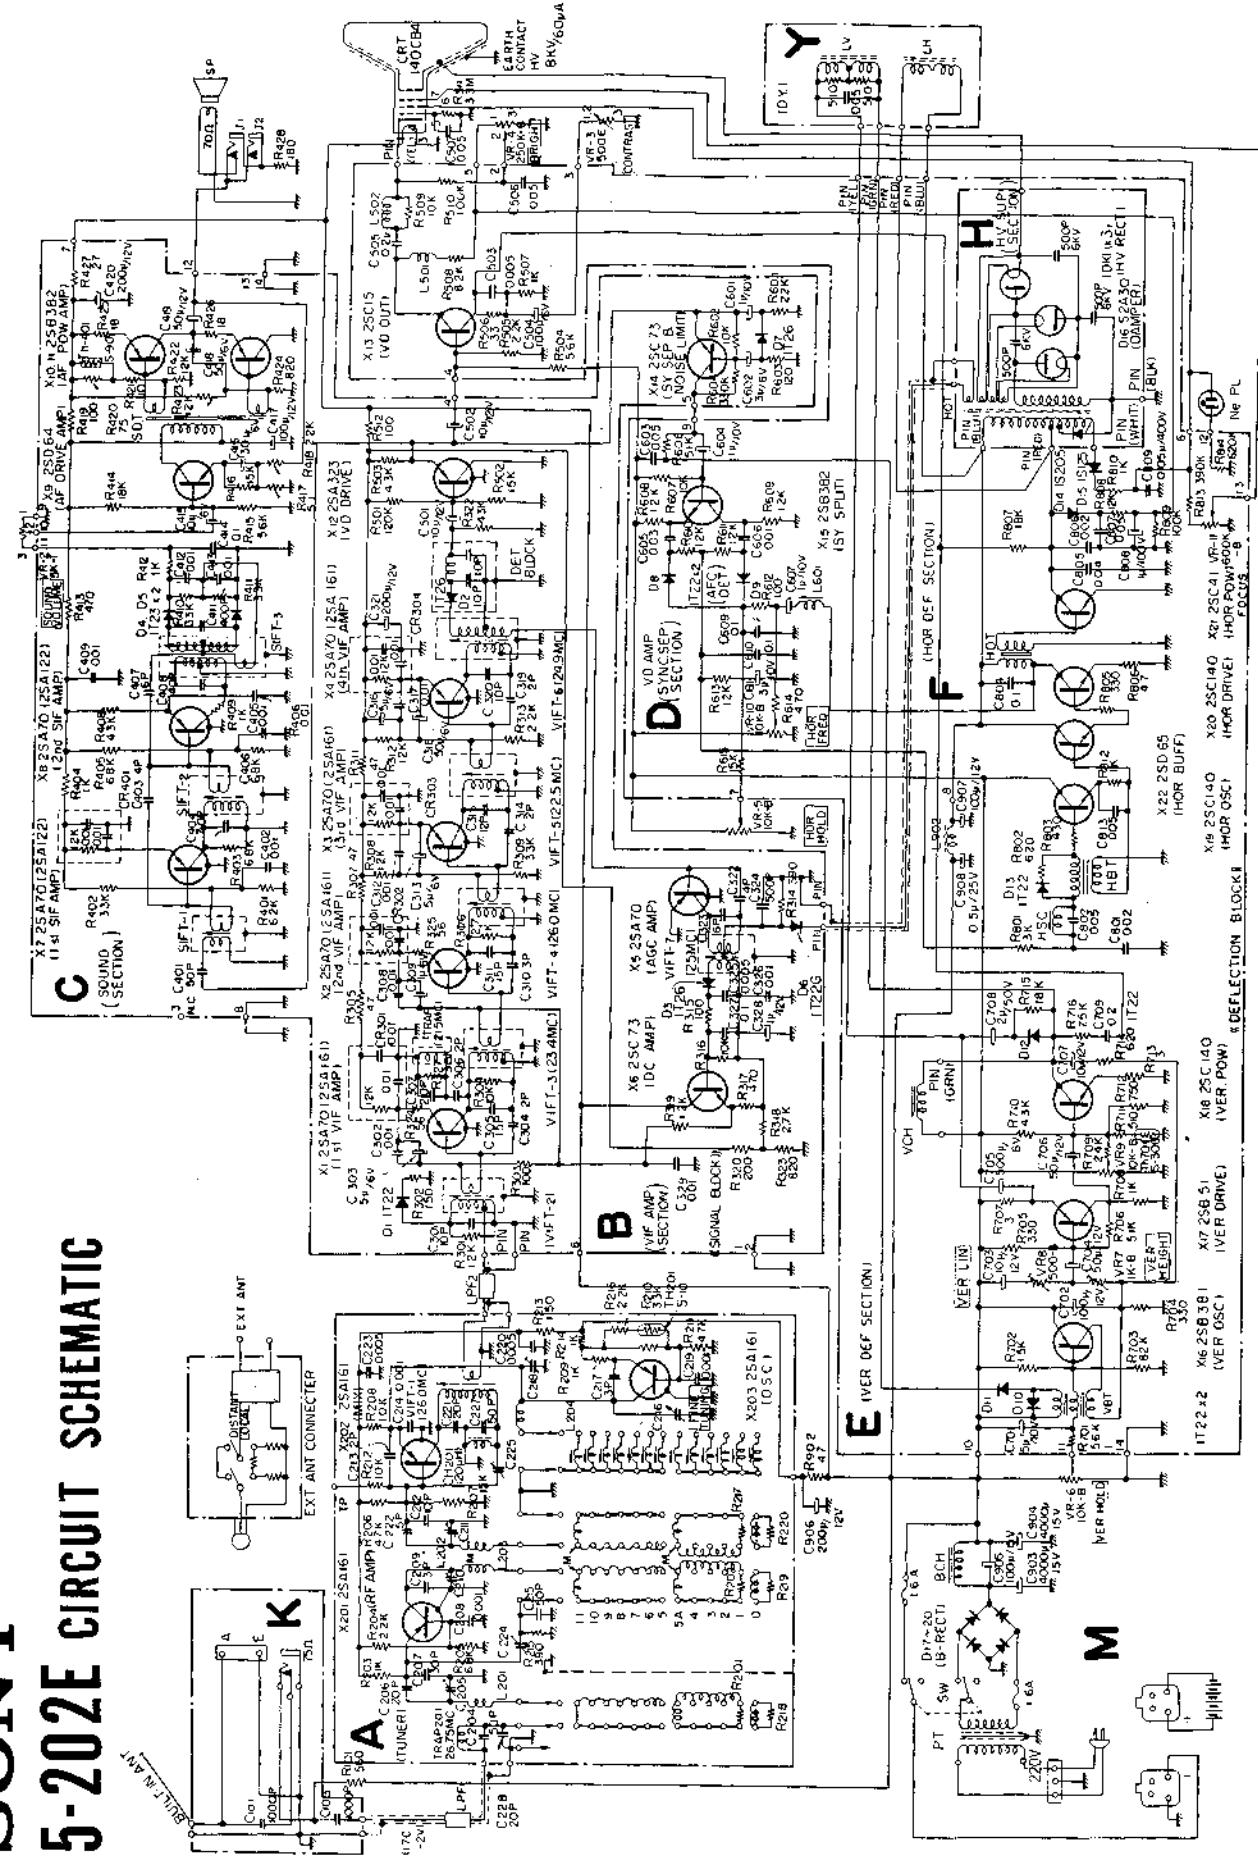

NOTE for TV 5-202E

SONY Micro TV Model 5-202E is specially made for the North European countries (Denmark, Norway and Sweden) and satisfies DEMKO, SEMKO and NEMKO Specifications. All the features of the 5-202E are entirely same as 5-303E, which is also made for Continental Europe except for the points explained below. Therefore please refer to the Servicing Guide for 5-303E when the set is repaired.

1. Difference between 5-202E and 5-303E.

	<u>5-202E</u> <u>Black</u>	<u>5-202E</u> <u>White</u>	<u>5-303E</u>
Battery Charger	NO	NO	Built-in
AC Power Cord	fixed	removable	removable

2. Parts List for 5-202E (Special Parts only)

<u>Part No.</u>	<u>Description</u>	<u>Q'ty per one set</u>
1-421-024-11	Filter Choke Coil	1
1-441-099-11	Power Transformer	1
1-506-056-11	4 Pole Plug for 5-202E (White)	1
X-40030-59-1	4 Pole Plug for 5-202E (Black)	1
1-532-037-11	Fuse 1.6A	1
1-534-055-11	AC Power Cord	1

Sony Corporation

© 1974