


Transistor table

Transistor	Collector (V)	Base (V)	Emitter (V)
AF117	4-60	1-90	1-77
AF117	2-80	0-65	0-40
AF117	4-60	0-71	0-50
AC127	0-14	1-05	1-17
AC128	2-35	0-14	0
AC128	4-60	2-30*	2-30*
AC127	0	2-30*	2-30*

* Measured at junction of R26/R27

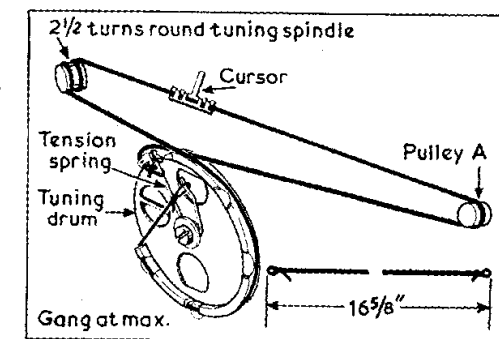

Resistors			Capacitors		
R1	6-8kΩ	B1	C1	—	B1
R2	15kΩ	B1	C2	—	B1
R3	1kΩ	B1	C3	—	B1
R4	12Ω	B1	C4	—	B1
R5	180kΩ	A1	C5	62pF	B1
R6	560Ω	B1	C6	0-01μF	B1
R7	56kΩ	A1	C7	25μF	B1
R8	220Ω	A1	C8	154pF	A1
R9	1kΩ	A1	C9	0-02μF	B1
R10	10kΩ	A1	C10	—	A1
R11	47kΩ	A1	C11	40μF	A1
R12	10kΩ	A1	C12	0-05μF	A1
R13	470Ω	A1			
R14	330Ω	A1			
R15	470Ω	A1			
R16	5kΩ	C1			
R17	15kΩ	C1			
R18	18kΩ	C1			
R19	10kΩ	C1			
R20	4-7Ω	C1			
R21	270Ω	C1			
R22	2-2kΩ	C1			
R23	100Ω	B1			
R24	130Ω	B1			
R25	390Ω	B1			
R26	1Ω	B1			
R27	1Ω	B1			

Coils*			Miscellaneous		
L1	3-3Ω	A1	X1	OA701	A1
L1a	—	B1		or OA90	A1
L2	16-2Ω	B1	S1-S3	—	B1
L2a	2-6Ω	A1	S4	—	C1
L3	4-8Ω	A1			
L3a	—	A1			
L4	—	A1			
L5	8-0Ω	A1			
L5a	2-1Ω	A1			
L6	—	A1			
L7	9-0Ω	A1			
L7a	3-3Ω	A1			
L8	1-8Ω	C1			
L9	8Ω	C1			

* Approximate d.c. resistance in ohms

PHILIPS 13RL180