

ADMIRAL 5A6 • 5B6 CHASSIS

36AM3-A
RECTIFIER
V5

18FY6
DETECTOR-AVC-AF AMP
V3

18FX6
CONVERTER
V1

34GD5
OUTPUT
V4

CHASSIS REMOVAL


Models Y3100, Y3104, Y3107 and Y3109 Only

One chassis mounting screw is accessible only after removing the tuning knob. The other is accessible after removing the cabinet back.

The cabinet back is held in four slots in the cabinet so is easily removed without the use of tools.

In Models Y3012A, Y3016A, and Y3019A Only, the cabinet is removed as shown in figure

LOOSEN THESE SCREWS UNTIL HELD ONLY BY LAST THREADS THEN PUSH AGAINST SCREWS WITH THUMBS. REMOVE SCREWS AFTER CHASSIS SLIDES FORWARD REMOVE THESE SCREWS

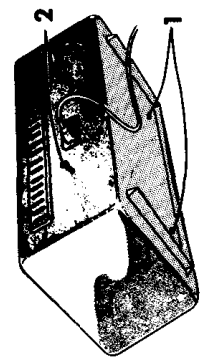


NOTES:

- ETCHED CIRCUIT GROUND
- ALL VOLTAGES TAKEN WITH VTVM, AT 117V LINE, NO SIGNAL INPUT. ALL VOLTAGES $\pm 10\%$.
- ALL CAPACITOR VALUES IN μF . ALL RESISTORS $1/2$ WATT 10% , UNLESS OTHERWISE SPECIFIED.

All readings made between tube socket terminals and common ground.

All voltages measured with vacuum-tube volt-meter.

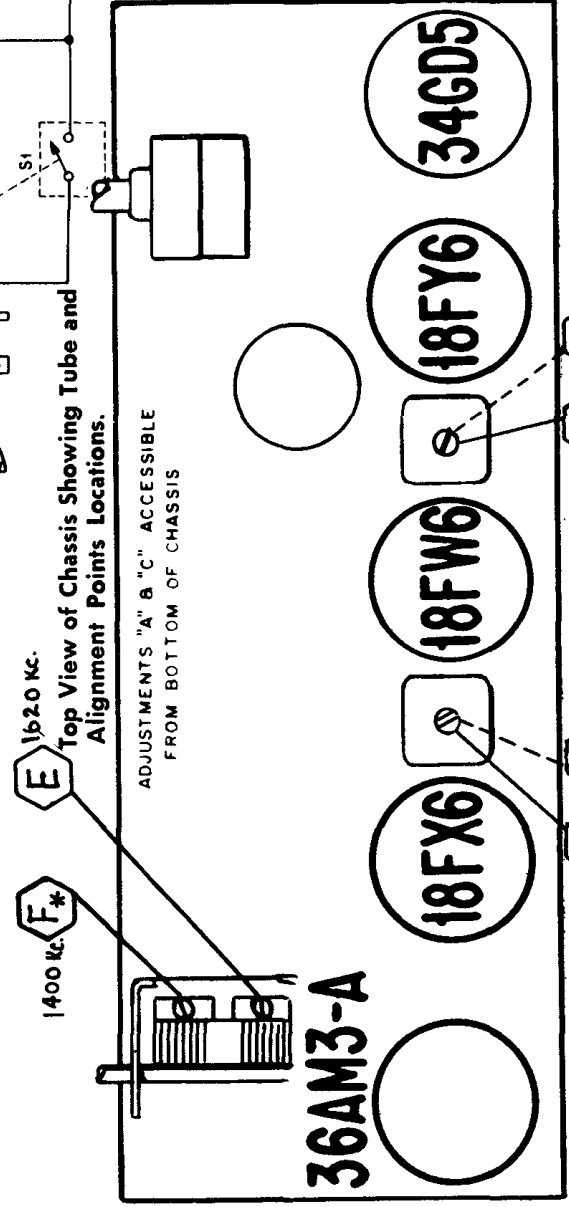

*FOR CHASSIS WITHOUT TRIMMER "F" ADJUST GIMMICK ON LOOP ANT.