


I.F.-465K.C.

2. NUMBERS SHOWN RELATIVE TO PARTS ARE PART NUMBERS.
3. NUMBERS SHOWN IN PARENTHESES ARE ILLUSTRATION NUMBERS.
4. Ⓢ INDICATES CAPACITY TOLERANCE $\pm 3\%$.
5. Ⓢ _____ $\pm 10\%$
6. PHONO JACK AND SWITCH ARE SPECIAL. DOTTED LINES SHOW CONNECTIONS.

BOTTOM VIEW OF CHASSIS

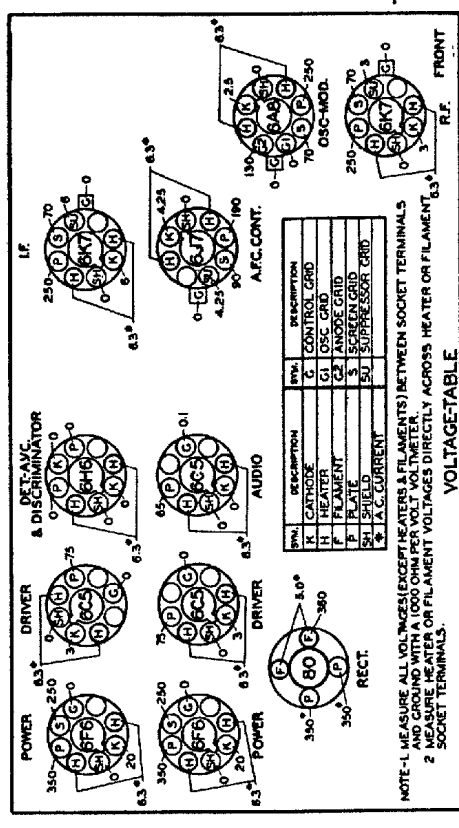

SYMBOL	DESCRIPTION	SYMBOL	DESCRIPTION
K	CATHODE	G	CONTROL GRID
H	HEATER	G1	OSC GRID
F	FLAMENT	G2	CONTROL GRID
P	PLATE	S	SCREEN GRID
SH	SHIELD	SS	SUPPRESSOR GRID
*	A.C. CURRENT		

NOTE-1. MEASURE ALL VOLTAGES (EXCEPT HEATERS & FILAMENTS) BETWEEN SOCKET TERMINALS AND GROUND WITH A 1000 OHM PER VOLT VOLTMETER.