

\*These voltage readings will be either lower or practically zero if taken with a 1000 ohms-per-volt meter.

## TUBE AND TRIMMER LOCATION

## DIAL CORD STRINGING



To string the dial cord, close the tuning gang. Start stringing at the tension spring and run the dial cord in the direction indicated by the arrow. See illustration below. Draw the dial cord tight to apply tension on the spring and prevent slipping at the tuning shaft.

## VOLTAGE DATA

Voltages shown on schematic diagram.

All voltages taken between tube socket terminals and B minus (pin 7 of 1U5 tube).

Dial set at low frequency end; volume control at minimum.

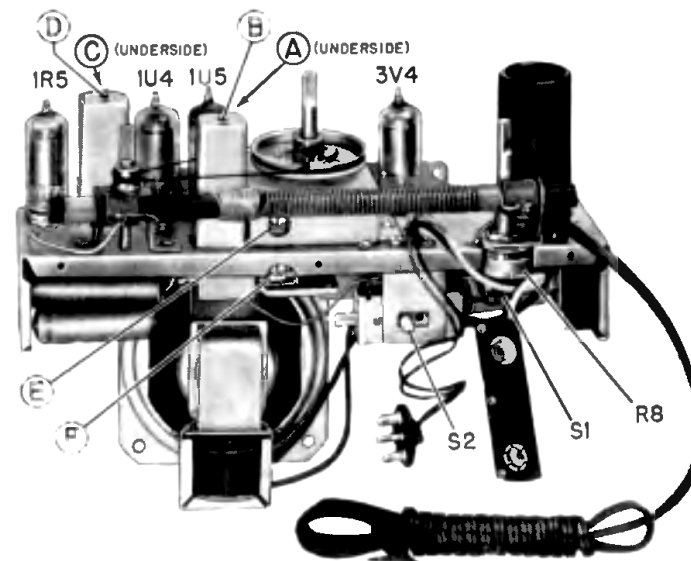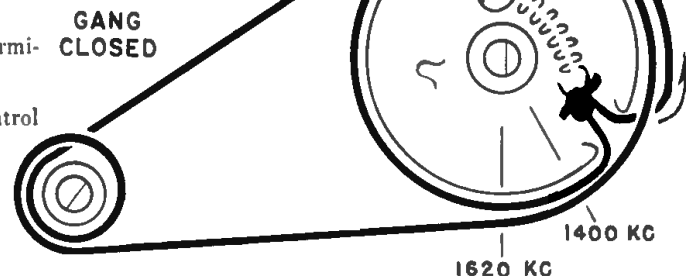

MODELS 4Y11, 4Y12, 4Y18, 4Y19  
CHASSIS 4Y1

**Admiral**