


Admiral


Chassis 6W3, 6W3A, used in Models Y3408, Y3411, Y3412

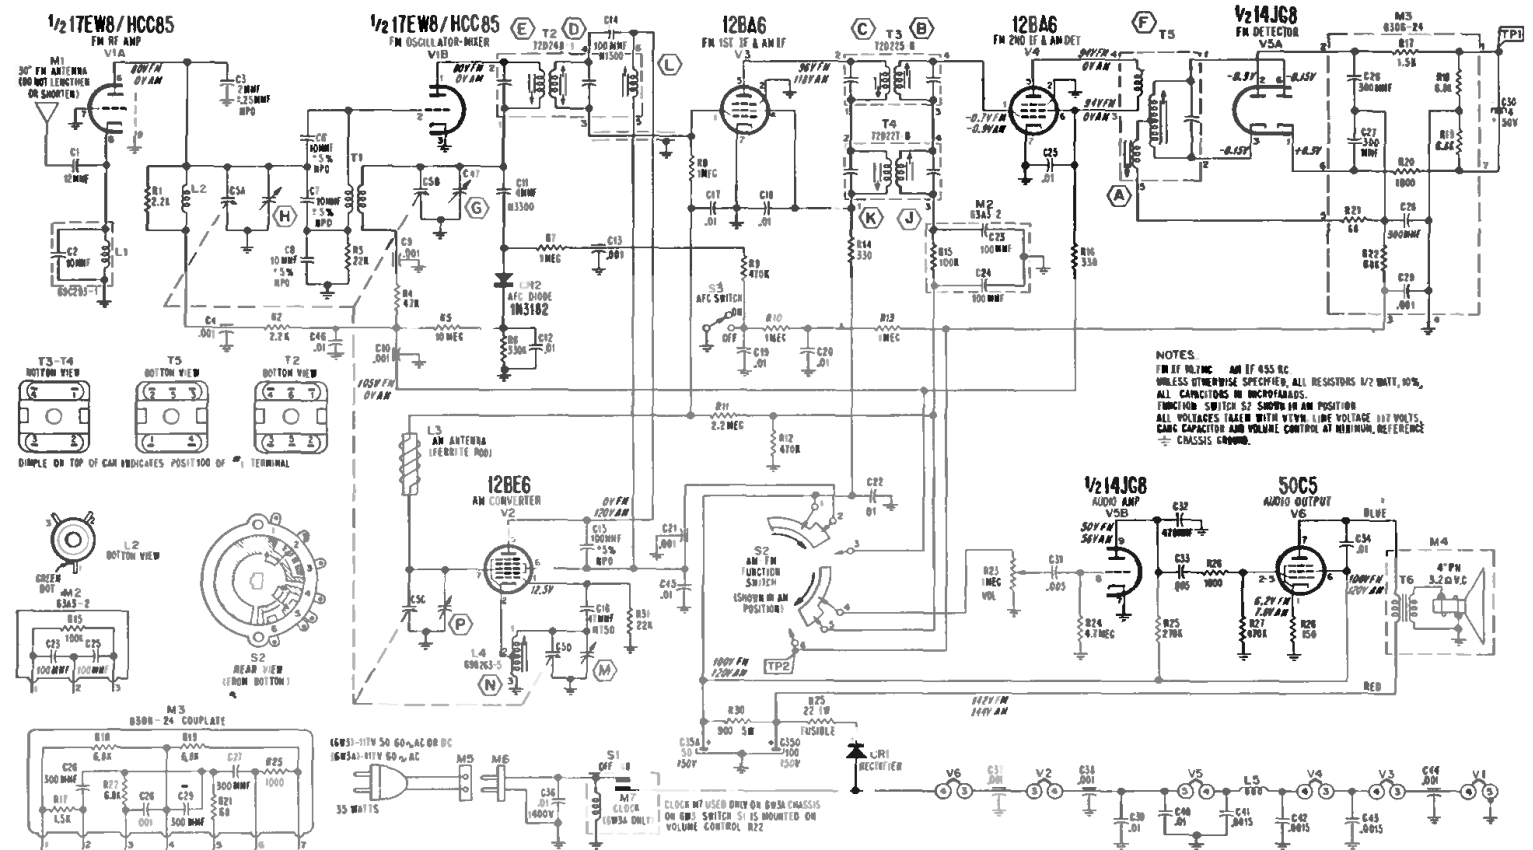

CHASSIS REMOVAL

1. Loosen two screws in back of cabinet until they are free from the cabinet front.
2. Remove two screws from bottom securing cabinet front to cabinet back.

3. With screwdriver, carefully pry cabinet front assembly away from the cabinet back by inserting screwdriver tip in the two notches in bottom of cabinet front assembly. This will break the AC interlock connection and allow the chassis with cabinet front to be pulled straight out from cabinet back.

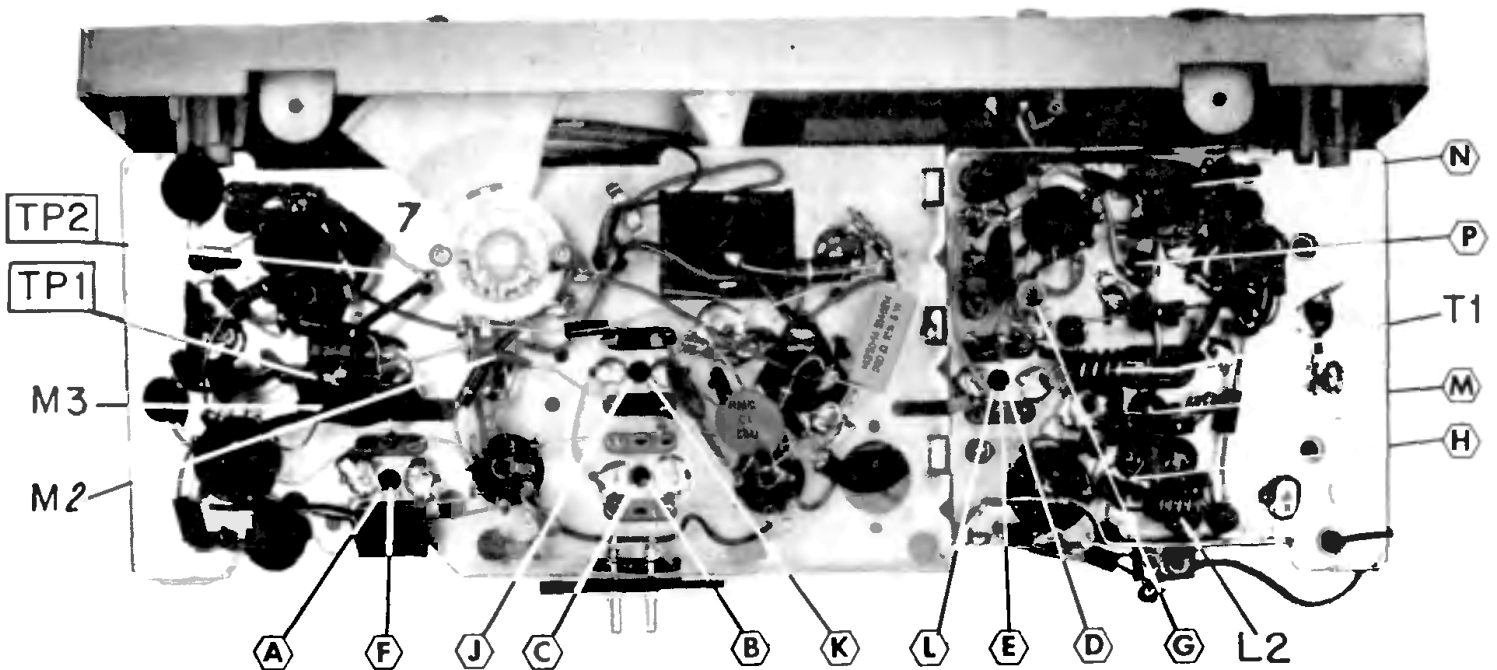

BOTTOM VIEW WITH SHIELD REMOVED

(A) (C) (E) and (K) are bottom slugs. (B) (F) (J) and (L) are top slugs.
 (G) (H) (M) and (P) are adjustable from the top of the chassis only.