






R11693



R11694

PHILIPS SERVICE

870 A


200—600 m
850—2000 m

2157

103—253 V

45 W.



VOL. GRAM.

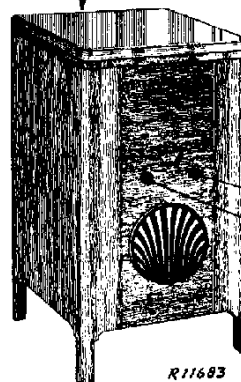


R11683

200—600 m	200—600 m	850—2000 m
VOL. max.	VOL. max.	VOL. max.
225 m—200 pF—	225 m—200 pF—	1000 m—200 pF—
C10, C11 225 m.	C10, C11 225 m	C10, C11 1000 m
C13 max.	225 m	C15 max.

R1	47000 Ω	48 427 10/47K	C1	8 pF	
R2	0.1 MΩ	48 427 10/100K	C2	2.5 pF	
R3	8200 Ω	48 426 10/8K2	C3	1 pF	25 114 06.0
R4	18000 Ω	48 427 10/1K8	C7	0.5 pF	
R6	820 Ω	25 718 90.0	C9	0.5 pF	
R7	47 Ω	48 426 10/47E	C21	0.1 pF	
R8	0.1 MΩ	48 425 10/100K	C3	0.5 pF	
R9	0.22 MΩ	48 425 10/220K	C4	0.5 pF	25 114 07.0
R10	600 Ω	40 427 10/680E	C8	0.5 pF	
R11	1 MΩ	48 425 10/1M	C10	430 pF	25 828 27.0*
R13	0.22 MΩ	48 425 10/220K	C11	430 pF	
R14	50000 Ω	49 500 20 0	C12	20 pF	49 005 05.2
R15	56000 Ω	48 425 10/56K	C13	30 pF	28 212 36.4
			C14	30 pF	28 212 36.4
			C15	30 pF	28 212 36.4
			C16	20 pF	48 429 10/20E
			C17	640 pF	48 429 10/640E
			C18	800 pF	48 429 10/800E
			C20	3200 pF	48 751 10/8K2
			C21	8200 pF	48 751 10/8K2
			C22	20 pF	48 429 10/20E
			C23	3300 pF	48 751 10/3K3
			C24	125 pF	48 429 10/125E
			C26	100 pF	48 429 10/100E

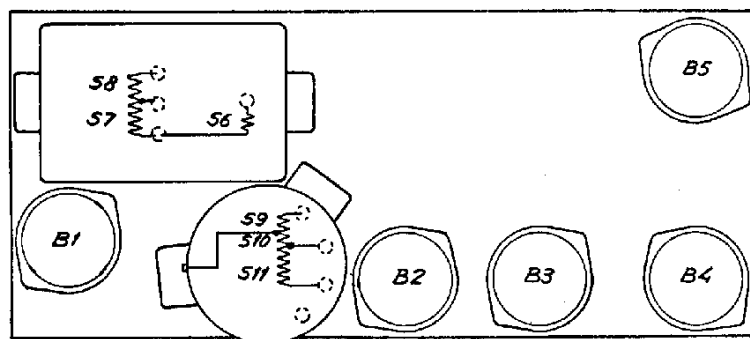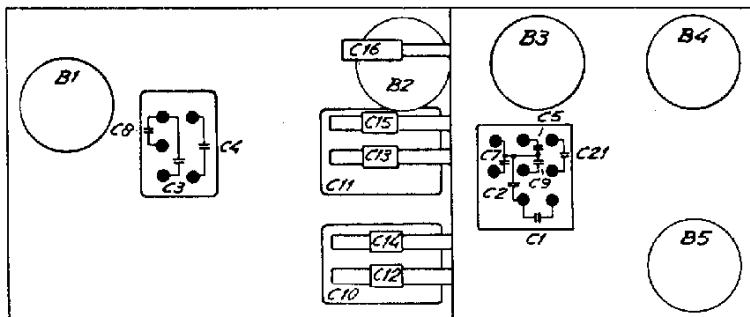

R11401



R11389

A	2950
B	2980

91, 92, 93, 94 96, 97, 98 99, 100, 101 102	25 648 37.0 — — 25 728 44.0*	S13, S14 S15 S17 S18	— — 25 727 99.0 —
---	---------------------------------------	-------------------------------	----------------------------

	B1	B2	B3	B4	B5	
	E 462	E 462	E 428	C 453	1823	
Va	160	155	75	150	—	V
Vg2	100	85	—	170	—	V
Ia	3	2	5	15,5	—	mA

VC2 = 170 V.

93 951 48.1

Copyright
N.V. Philips Gloeilampenfabrieken,
Eindhoven
Imprimé en Hollande