


DEWALD RADIO

MODELS 645, 645LW, 652

These models are superheterodyne receivers, with full automatic volume control on all bands. They have been designed to operate on 110-125 volts, 40-60 cycles AC or DC unless otherwise specified. A slide rule instrument type dial which simplifies tuning is featured in these receivers. The ranges of the models are as follows:

MODEL	RANGE COVERAGE	
645	555-174 meters 540-1725 K.C.	50-16 meters 6.0-18.5 K.C.
645 L.W.	555-174 meters 540-1725 K.C.	2000-750 meters 150-400 K.C.
652	555-174 meters 540-1725 K.C.	50-16 meters 6.0-18.5 K.C.
		2000-750 meters 150-4000 K.C.

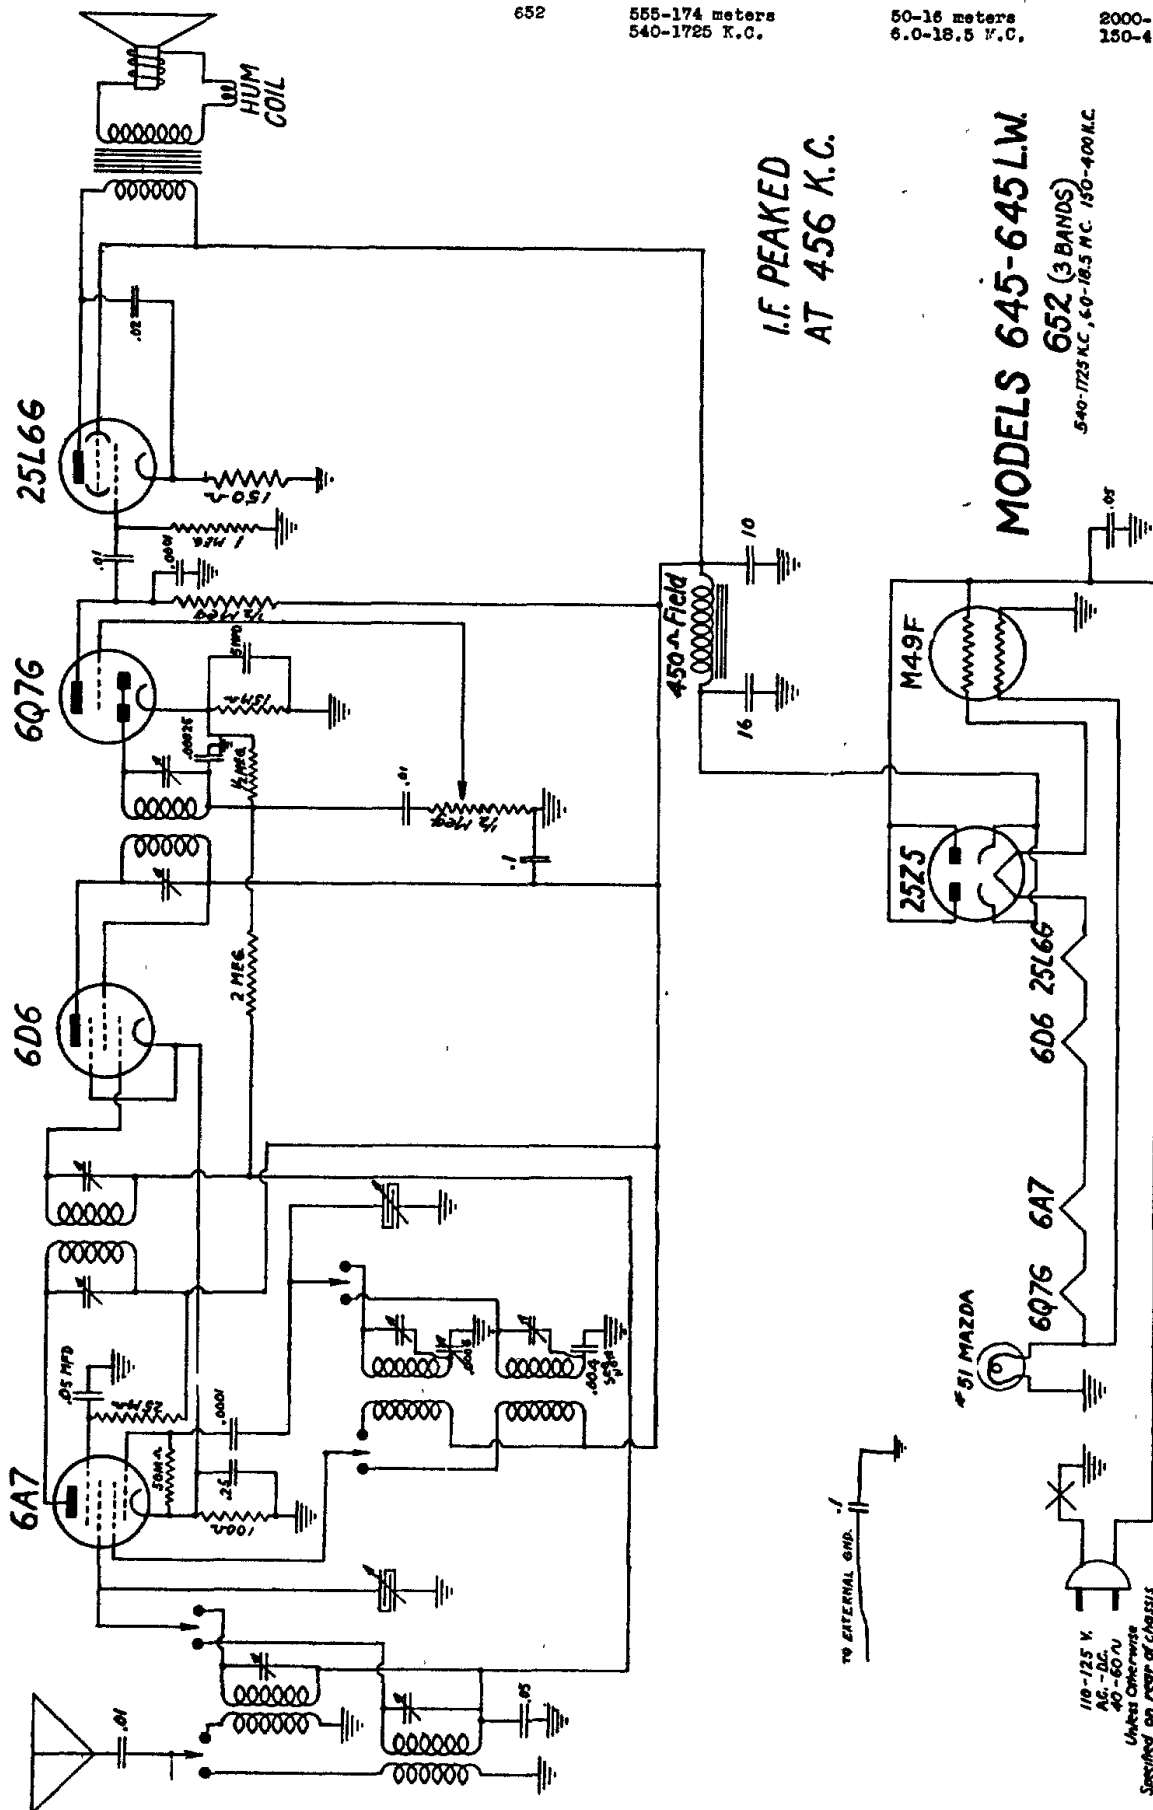

NOTE: On Models 645 L.W. this condenser is .00025