


# EMERSON RADIO & PHONO. CORP.

MODEL 101U  
Chassis U68

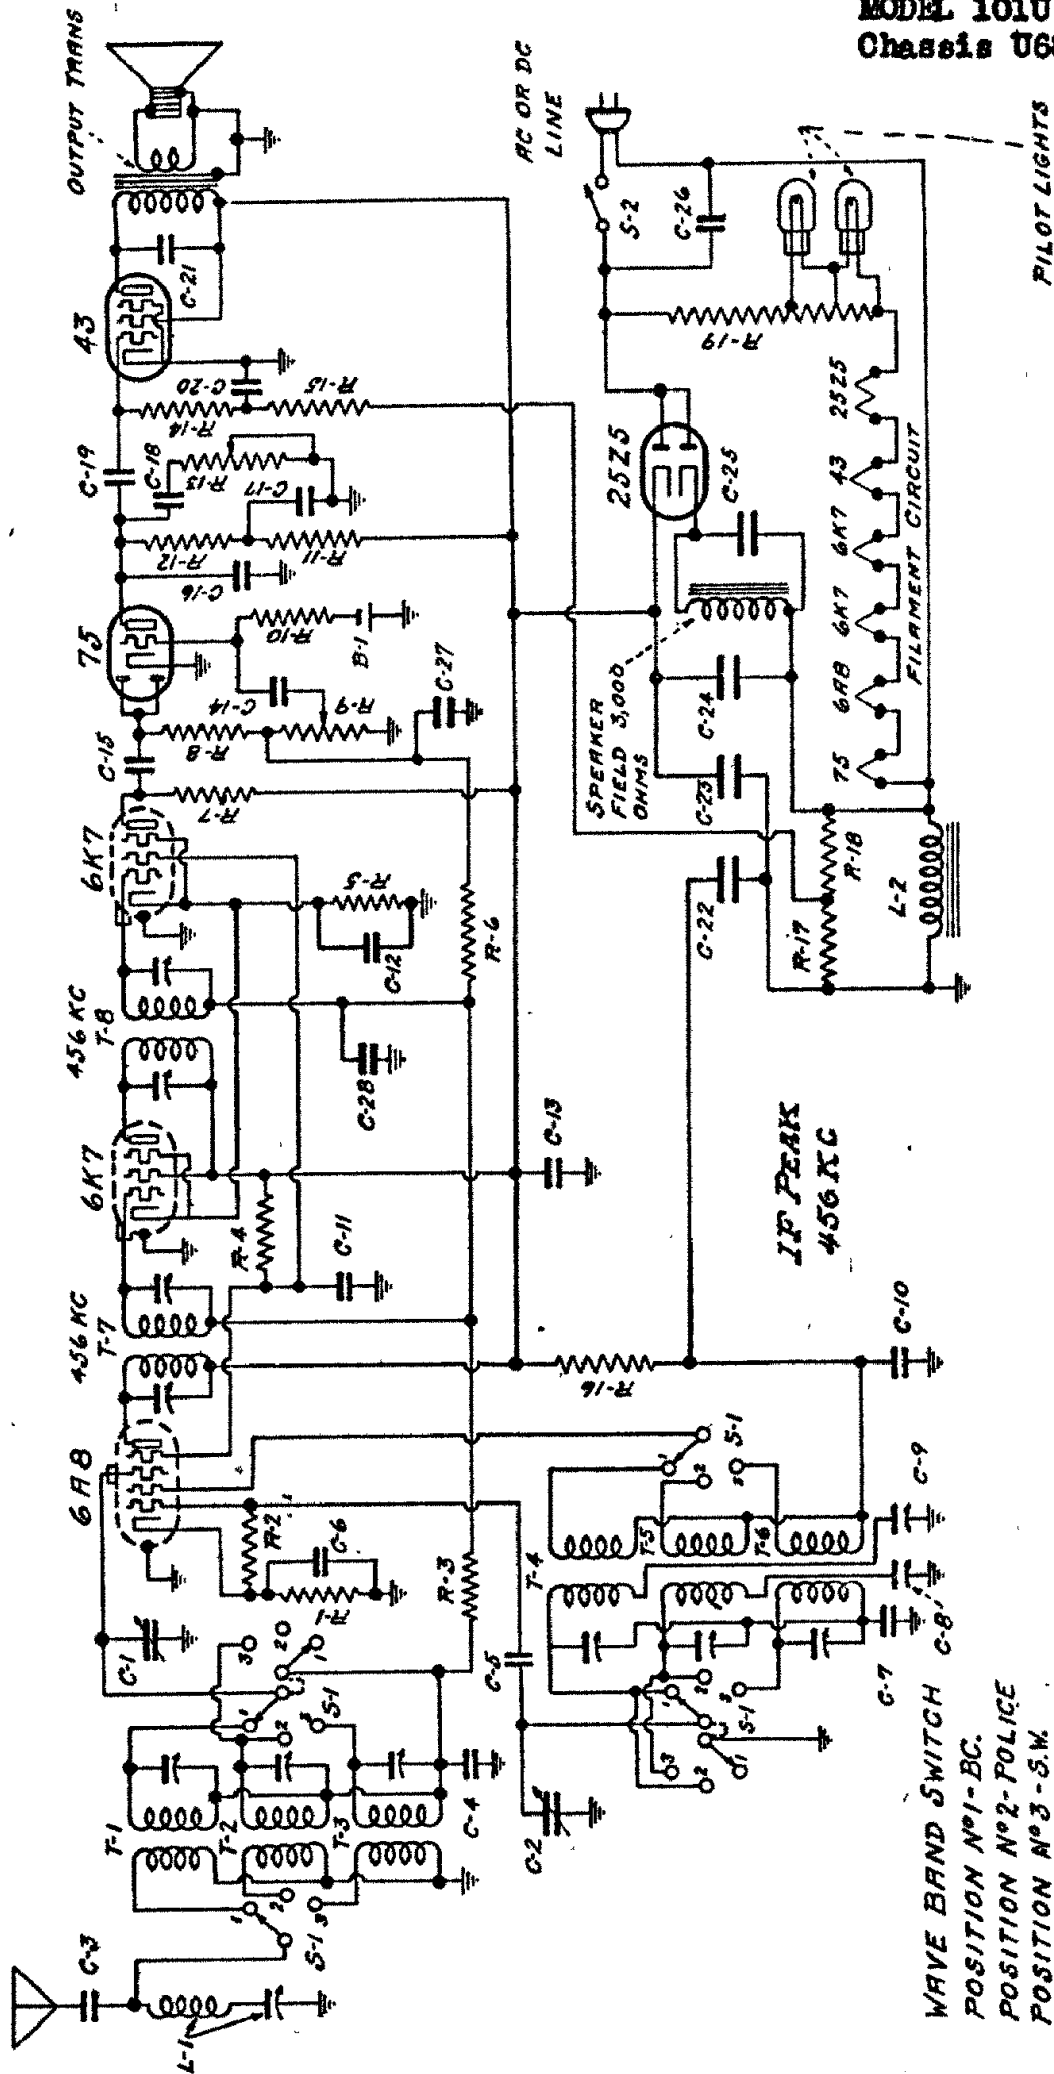

The tube complement is as follows:

- 1—6A8 (metal) Pentagrid oscillator-modulator
- 1—6K7 (metal) 1st i-f amplifier
- 1—6K7 (metal) 2nd i-f amplifier (adjacent to 75)
- 1—75 (glass) 2nd detector—a-f amplifier, a.v.c.
- 1—43 (glass) Power output pentode
- 1—25Z5 (glass) Half-wave rectifier

Voltage rating ..... 105-130 volts.  
Current drain ..... 0.43 amps.  
Frequency ranges ..... 540 to 1660 kc, 1580 to 4750 kc, 5.5 to 16 mc.