


UNITED MOTORS SERVICE

SERVICE INSTRUCTIONS - BUICK MODEL 980782

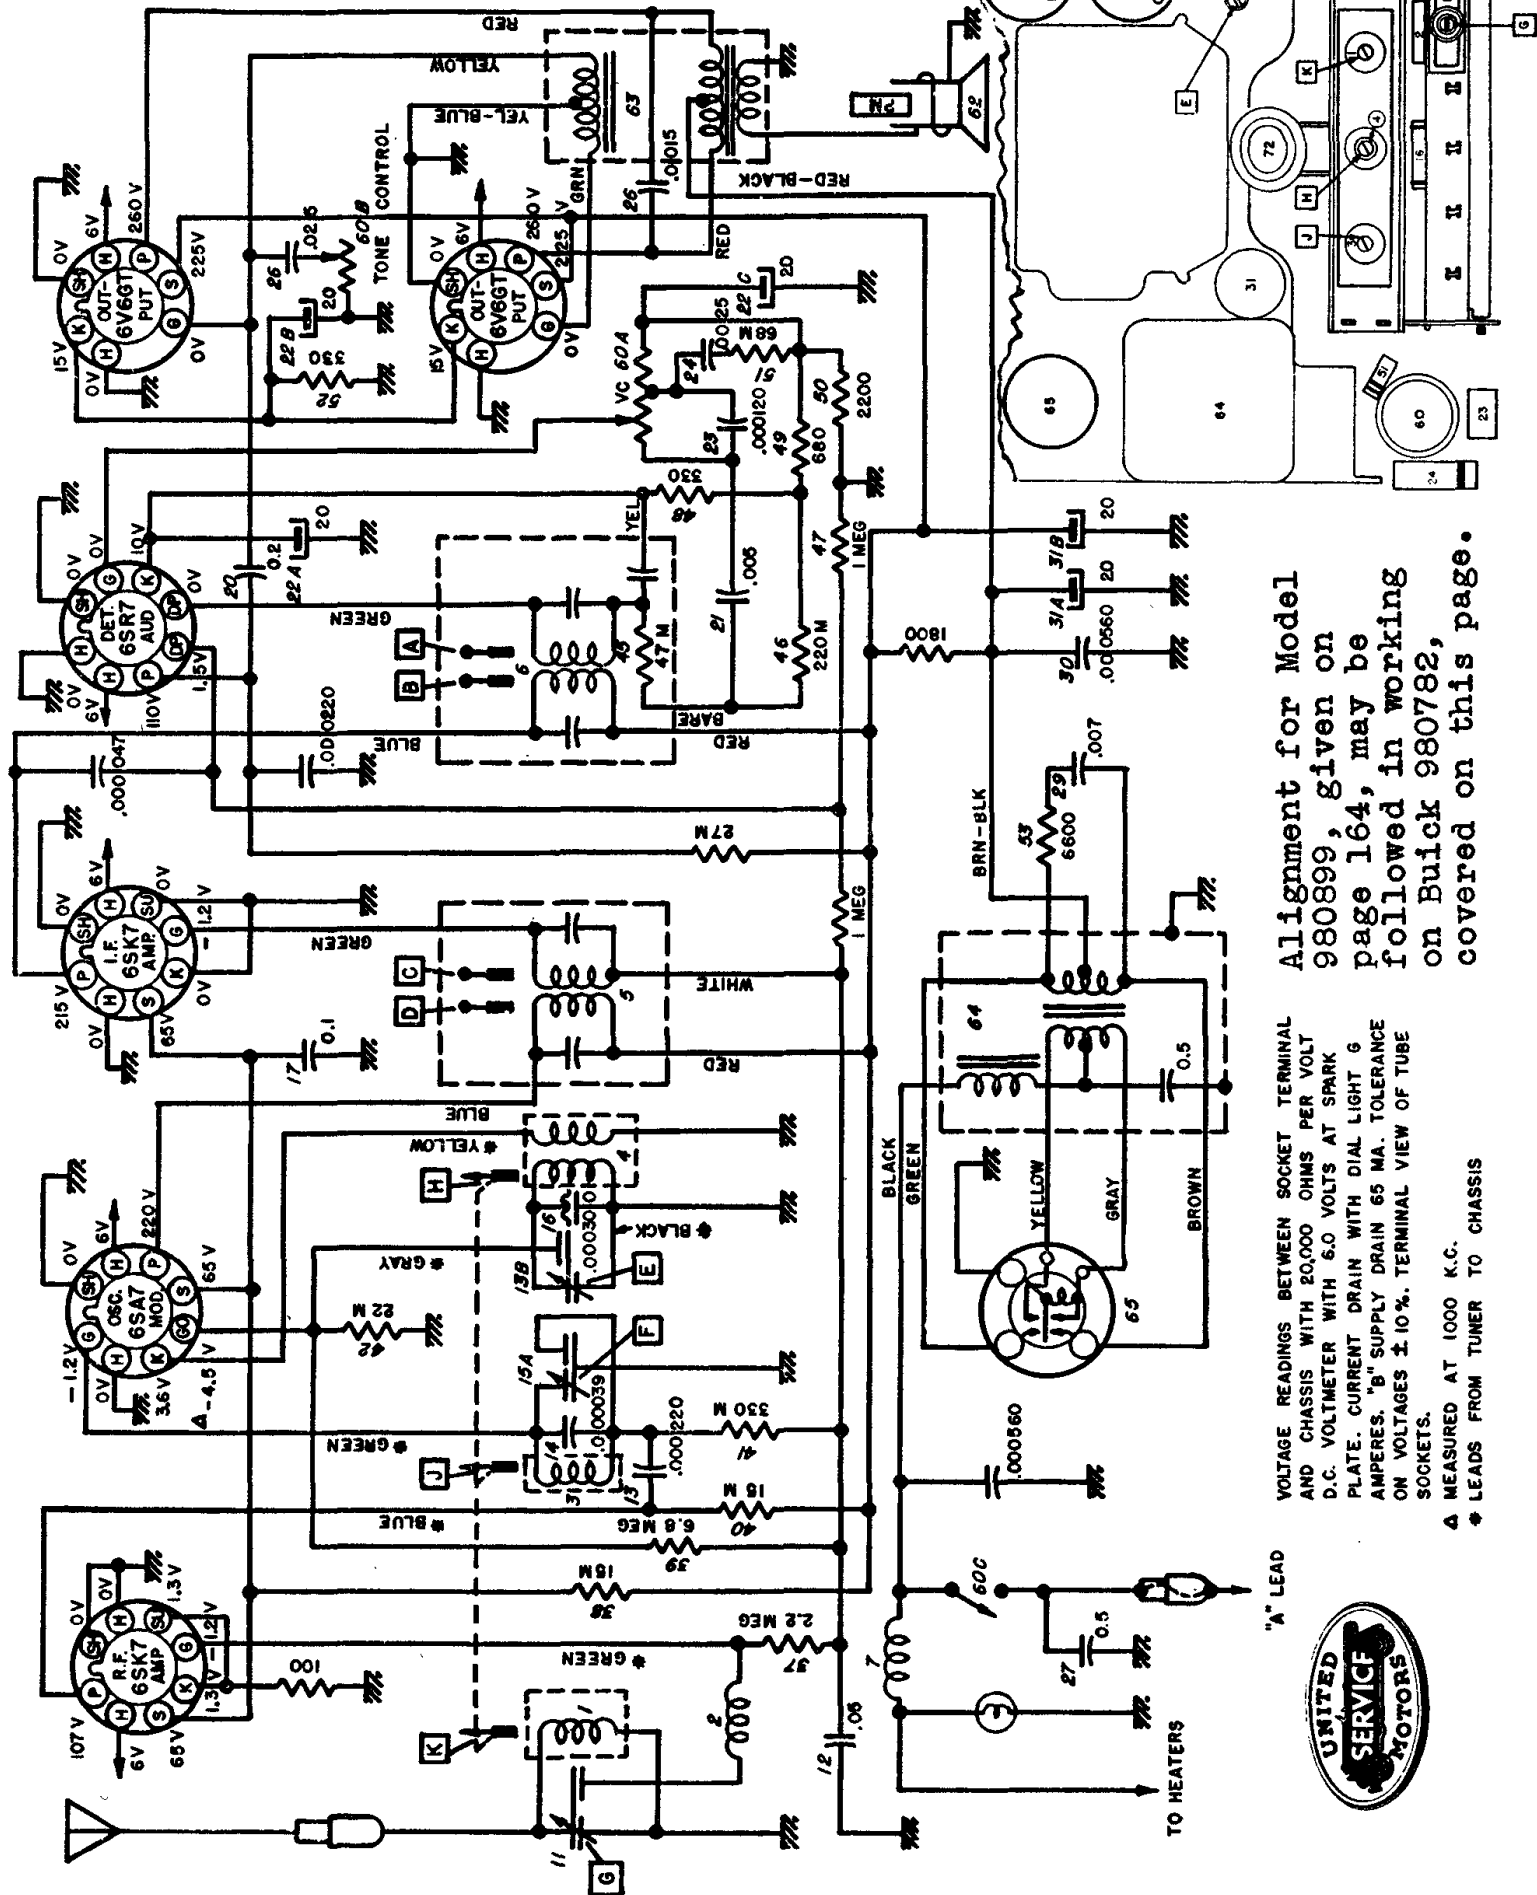

Alignment for Model 980899, given on page 164, may be followed in working on Buick 980782, covered on this page.

VOLTAGE READINGS BETWEEN SOCKET TERMINAL AND CHASSIS WITH 20,000 OHMS PER VOLT D.C. VOLTMETER WITH 6.0 VOLTS AT SPARK PLATE. CURRENT DRAIN WITH DIAL LIGHT 6 AMPERES. "B" SUPPLY DRAIN 65 MA. TOLERANCE ON VOLTAGES $\pm 10\%$. TERMINAL VIEW OF TUBE SOCKETS.

▲ MEASURED AT 1000 K.C.
◆ LEADS FROM TUNER TO CHASSIS

