


**GRISBY-GRUNOW
MAJESTIC**

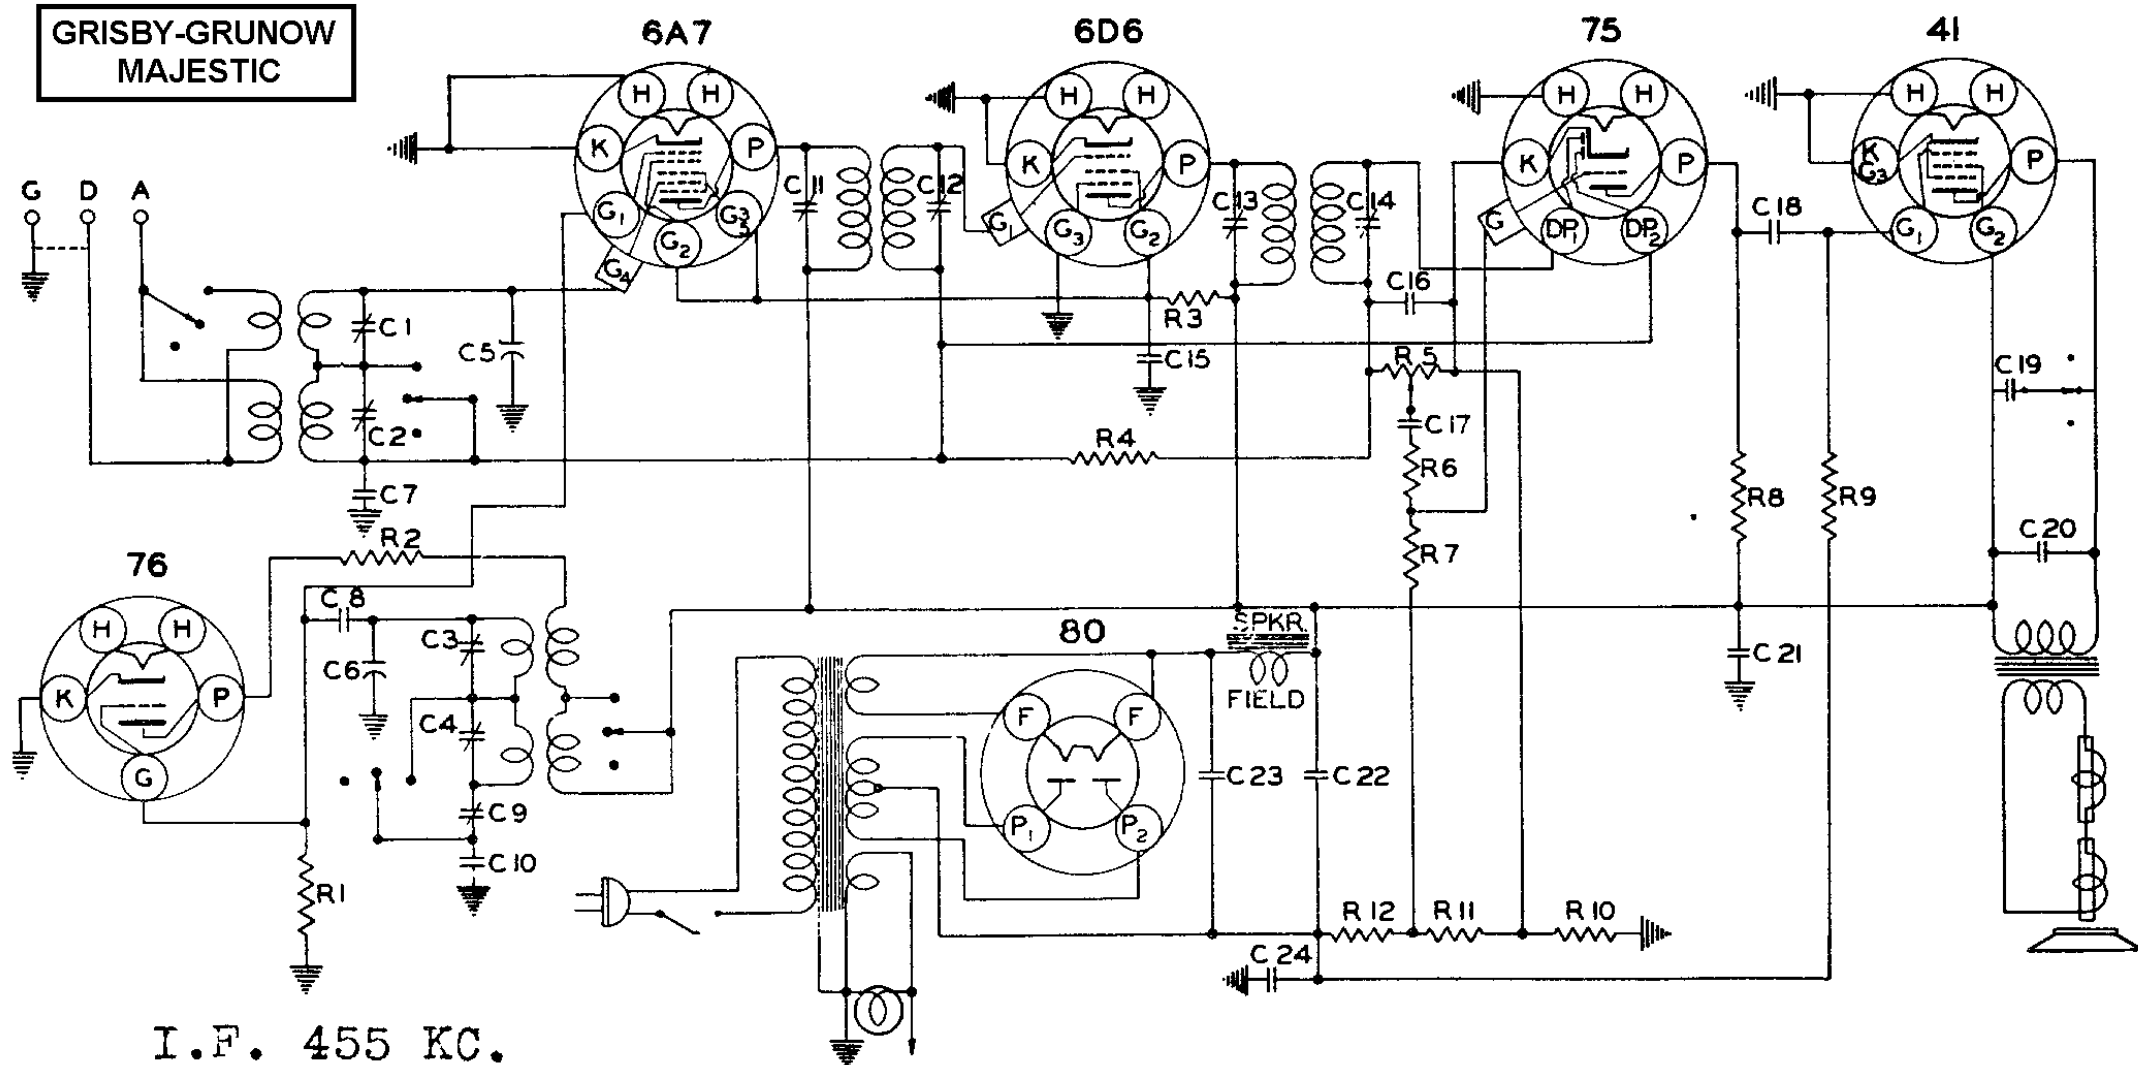

Schematic Location	Description	Schematic Location	Part No.	Description	Schematic Location	Description
R1	50K $\frac{1}{4}$ W 20%	R10	61 Ohms	E-C-6 Candohm	C11, C12	Trimmer cond.
R2	100K $\frac{1}{4}$ W 20%	R11	33 Ohms		C13, C14	Trimmer cond.
R3	7.5K 2W $\frac{1}{4}$ W 20%	R12	150 Ohms		C15, C21	Tubular cond. .05 mfd 400V
R4	2 Meg. $\frac{1}{4}$ W 20%	C1, C2 }	Y-CP-2	Trimmer cond.	C16	Mica cond. 250 mmf. 20%
R5	Volume control 1 meg.	C3, C4 }	Y-CV19	Variable gang condenser	C17, C18, C19	Tubular cond. .01 mfd. 400 V
R6, R8	250K $\frac{1}{4}$ W 20%	C5, C6 }	C-15752	Tubular cond. .05 mfd. 200 V	C20	Tubular cond. .006 m.f.d. 400V
R7	1 Meg.	C7	CM-15929	Mica cond 50 mmf. 20%	C22 }	8,300 V
R9	500K $\frac{1}{4}$ W 20%	C8	C-16472	Padder cond.	C23 }	12,300 V
		C9	CM-17	Mica cond. 4330	C24 }	20,25 V
		C10				