


SCHEMATIC DIAGRAM MODEL 62A

GRISBY-GRUNOW
MAJESTIC

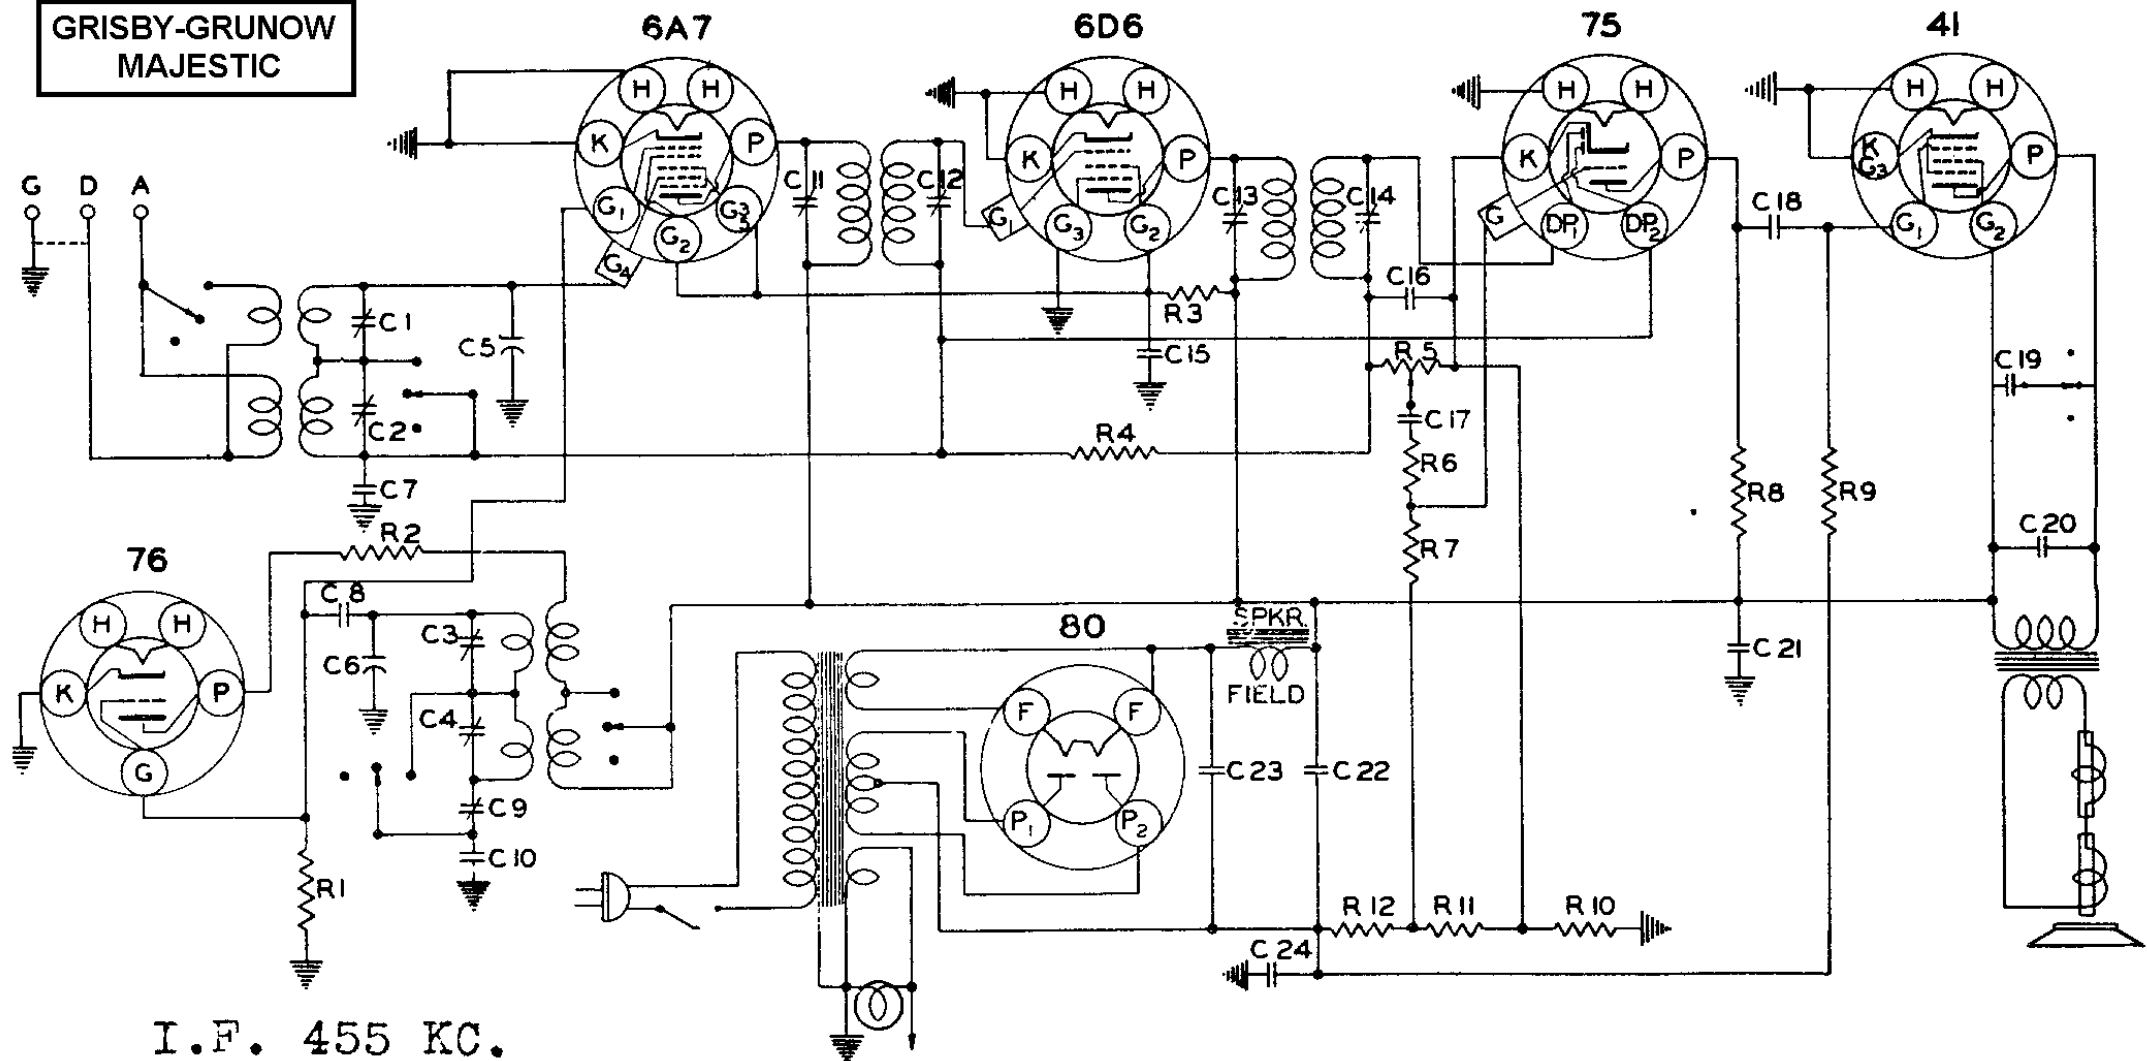

Schematic Location

Description

R1	50K 1/4 W 20%
R2	100K 1/4 W 20%
R3	7.5K 2 W 1/4 W 20%
R4	2 Meg. 1/4 W 20%
R5	Volume control 1 meg.
R6, R8	250K 1/4 W 20%
R7	1 Meg.
R9	500K 1/4 W 20%

Schematic Location

Part No.

Description

R10	61 Ohms	E-C-6 Candohm
R11	33 Ohms	
R12	150 Ohms	
C1, C2	Y-CP-2	Trimmer cond.
C3, C4	Y-CV19	Variable gang condenser
C5, C6	C-15752	Tubular cond. .05 mfd. 200 V
C7	CM-15929	Mica cond 50 mmf. 20%
C8	C-16472	Padder cond.
C9	CM-17	Mica cond. 4330
C10		

Schematic Location

Description

C11, C12	Trimmer cond.
C13, C14	Trimmer cond.
C15, C21	Tubular cond. .05 mfd 400V
C16	Mica cond. 250 mmf. 20%
C17, C18, C19	Tubular cond. .01 mfd. 400 V
C20	Tubular cond. .006 m.f.d. 400V
C22	8,300 V
C23	12,300 V
C24	20,25 V