


Sensitivity (For .05 Watt Output)

"A" Battery..... 9 Volts—50 Ma.
 "B" Battery..... 90 Volts—11.5 Ma.
 Power Consumption (At 117 volts AC Supply) 28 Watts

25 CYCLE MODELS
THE CAPACITY OF CONDENSERS
C12A-C12B & C20A-C20B-C20C
IS DOUBLED BY ADDING ADDITIONAL
CONDENSER UNITS OF SAME
VALUE & PART NUMBER IN
PARALLEL WITH PRESENT
CONDENSERS.

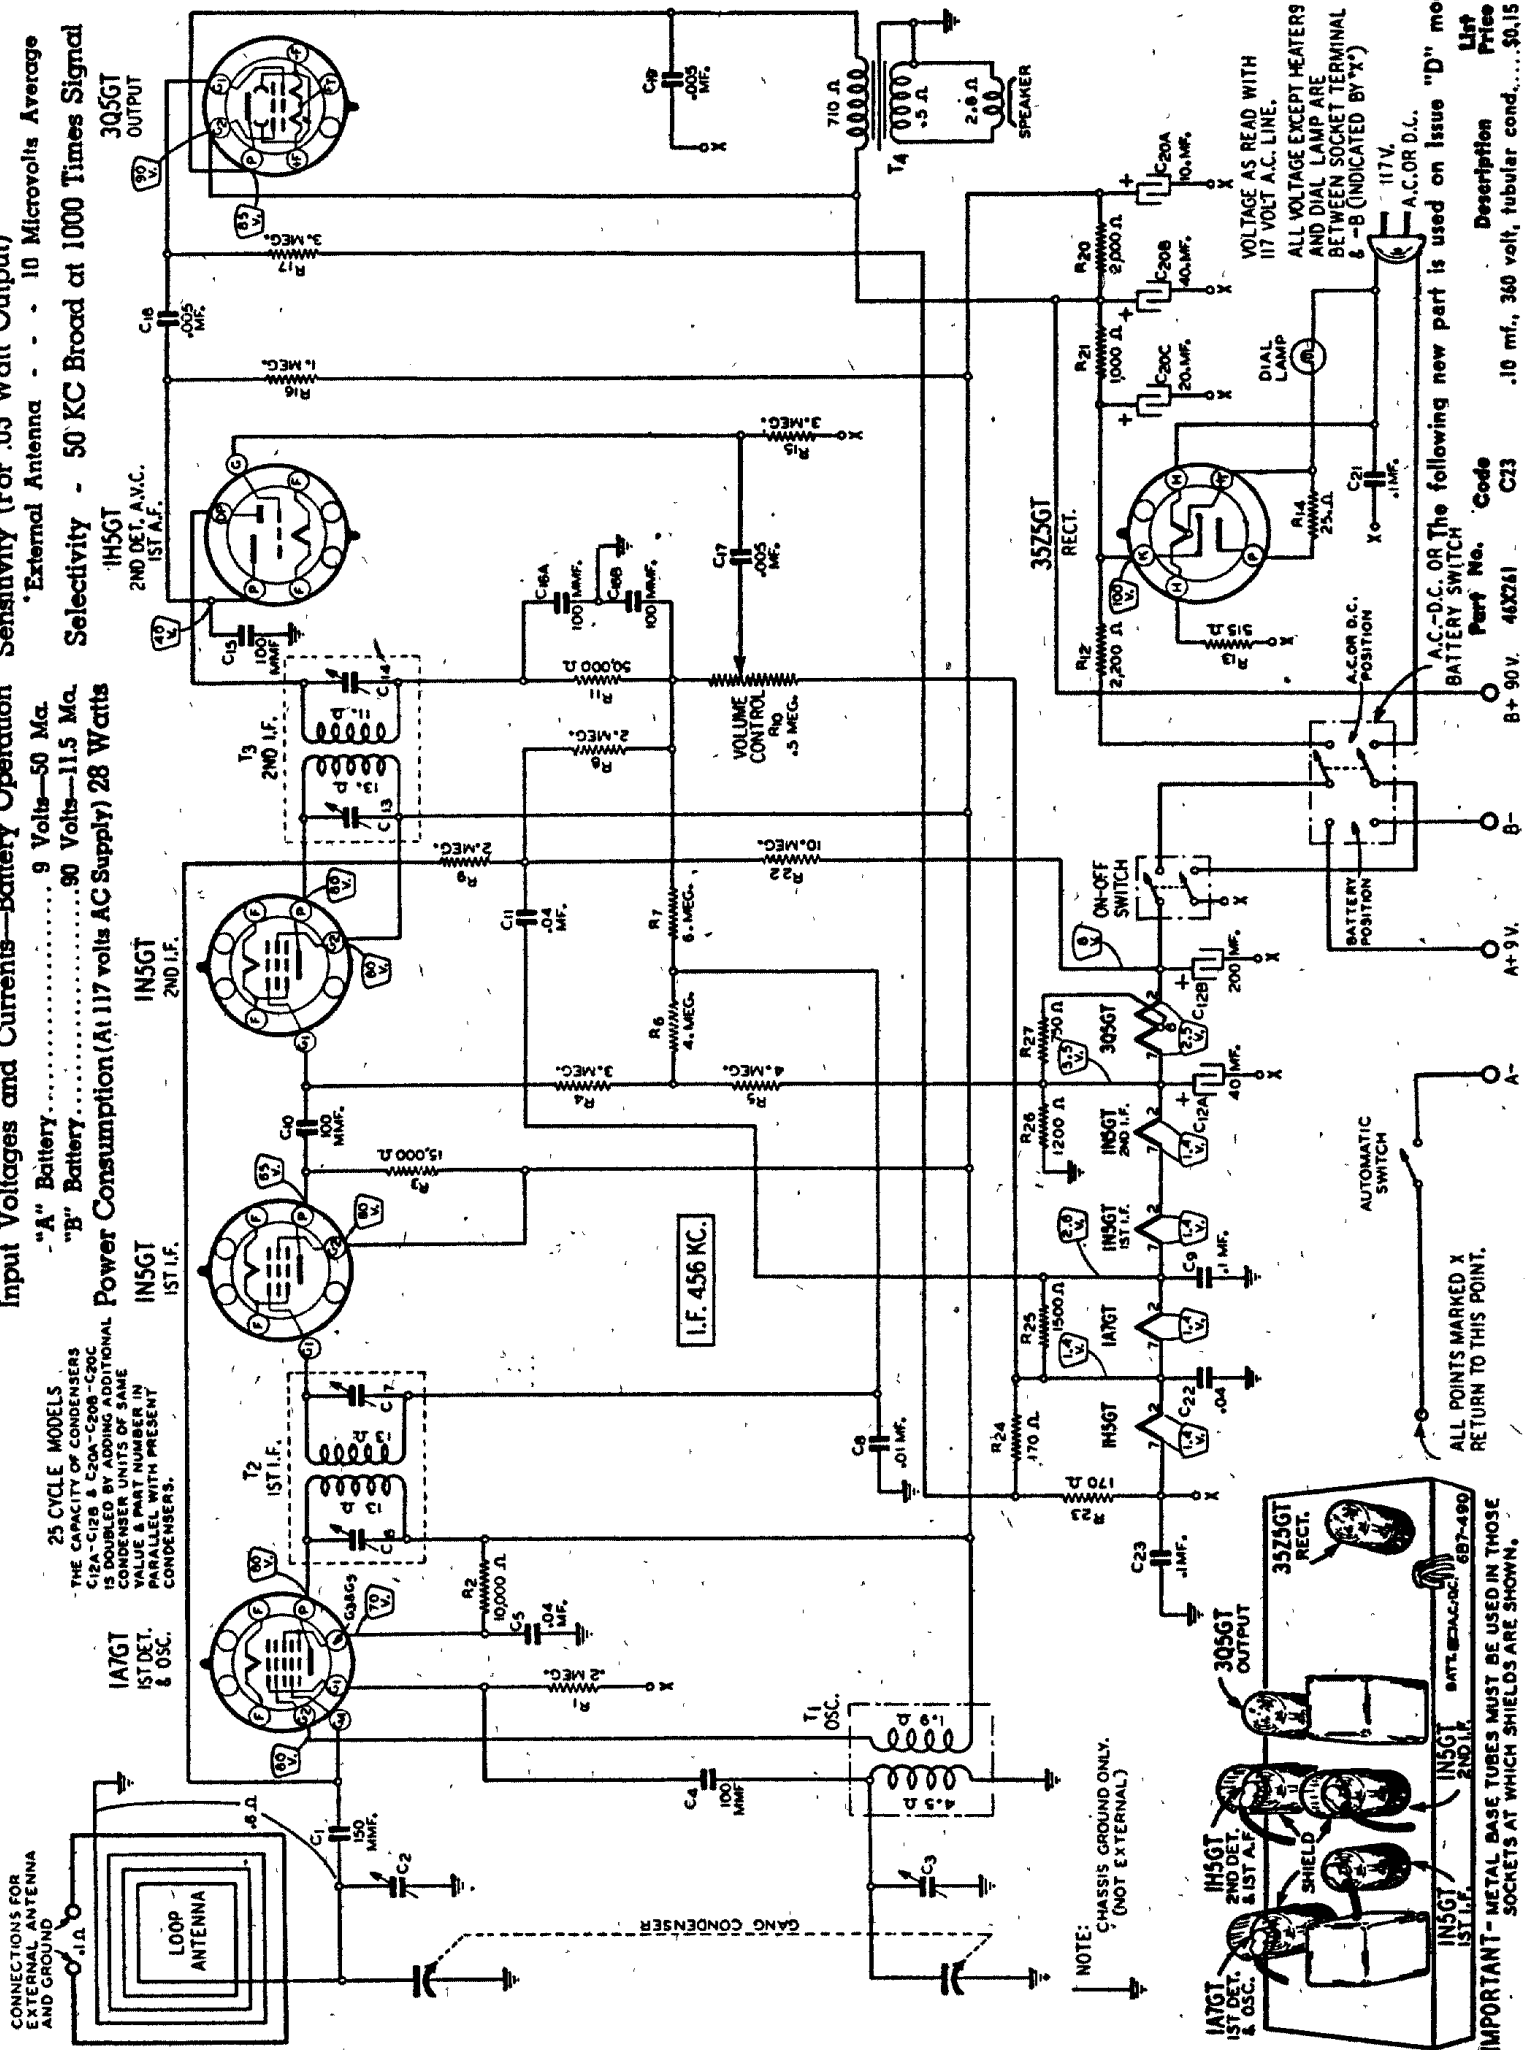

IMPORTANT - METAL BASE TUBES MUST BE USED IN THOSE SOCKETS AT WHICH SHIELDS ARE SHOWN.

Part No.	Code	Description	Price
B + 90 V.	46X241	.10 mf., 360 volt, tubular cond.	\$.15