


Gamble-Skogmo, Inc.

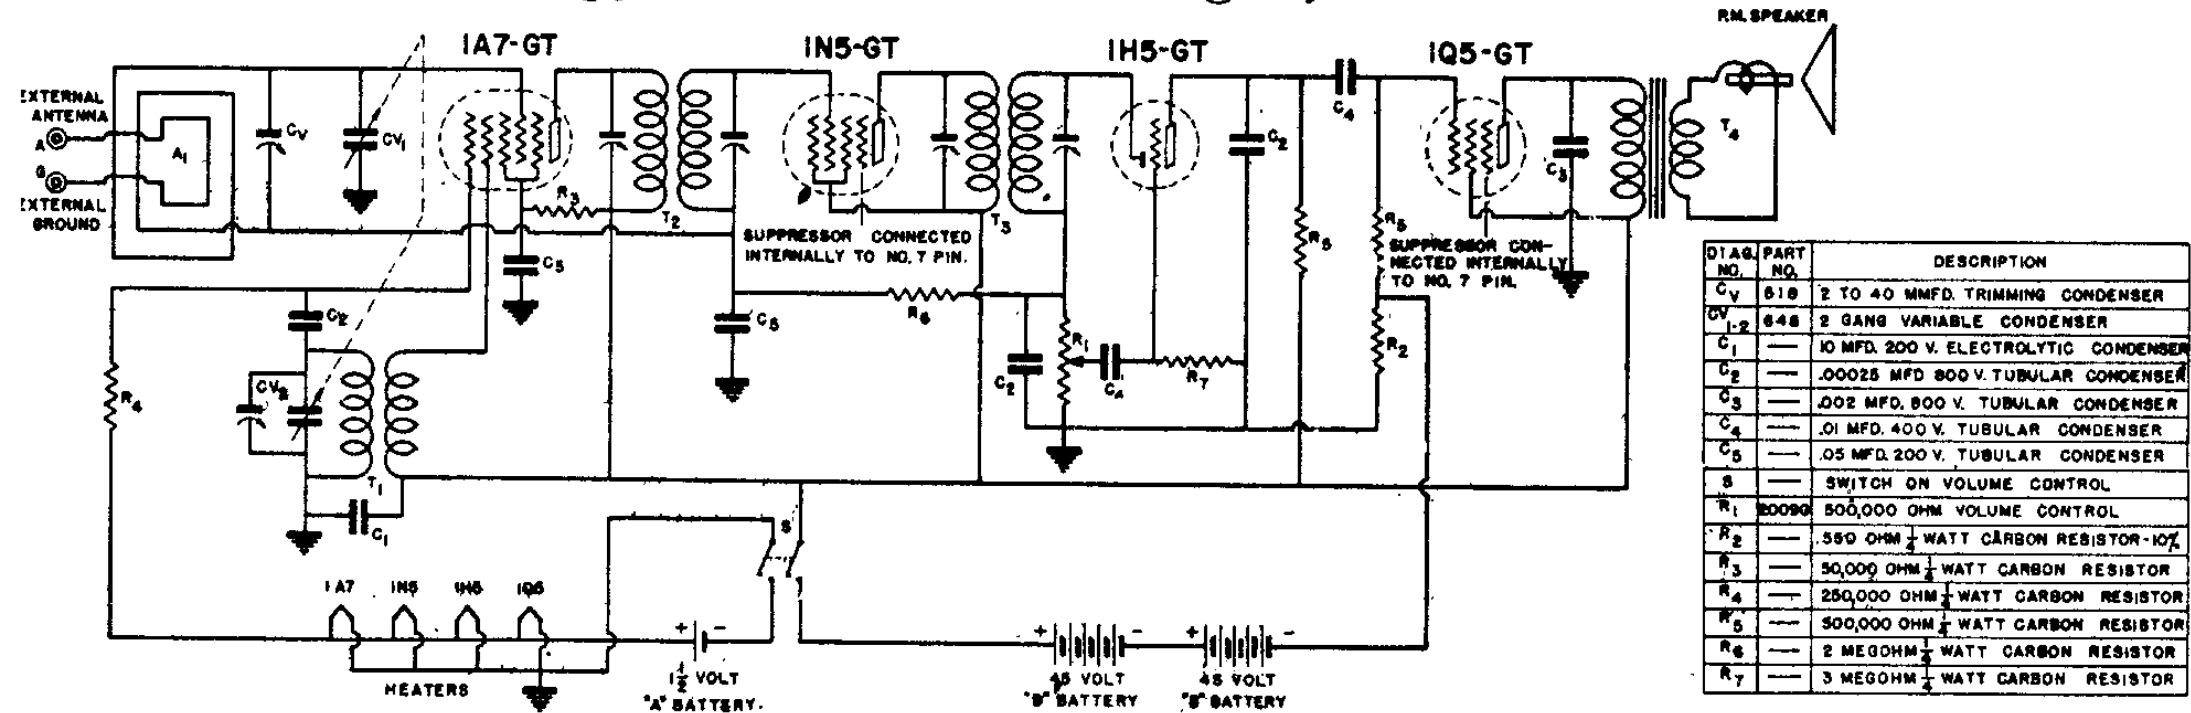

DIAG. NO.	PART NO.	DESCRIPTION
C _v	618	2 TO 40 MMFD. TRIMMING CONDENSER
C _v 1-2	648	2 GANG VARIABLE CONDENSER
C ₁	—	10 MFD. 200 V. ELECTROLYTIC CONDENSER
C ₂	—	.00025 MFD 800 V. TUBULAR CONDENSER
C ₃	—	.002 MFD. 800 V. TUBULAR CONDENSER
C ₄	—	.01 MFD. 400 V. TUBULAR CONDENSER
C ₅	—	.05 MFD. 200 V. TUBULAR CONDENSER
S	—	SWITCH ON VOLUME CONTROL
R ₁	20090	500,000 OHM VOLUME CONTROL
R ₂	—	550 OHM $\frac{1}{2}$ WATT CARBON RESISTOR - 10%
R ₃	—	50,000 OHM $\frac{1}{2}$ WATT CARBON RESISTOR
R ₄	—	250,000 OHM $\frac{1}{2}$ WATT CARBON RESISTOR
R ₅	—	500,000 OHM $\frac{1}{2}$ WATT CARBON RESISTOR
R ₆	—	2 MEGOHM $\frac{1}{2}$ WATT CARBON RESISTOR
R ₇	—	3 MEGOHM $\frac{1}{2}$ WATT CARBON RESISTOR