


**GAROD RADIO CORP. MODELS 309T, 309L, 309E-1, 309-2
309-3, 309E-2, 309E-3, 309P-5, 309P-7
309E-P5, 309E-P7**

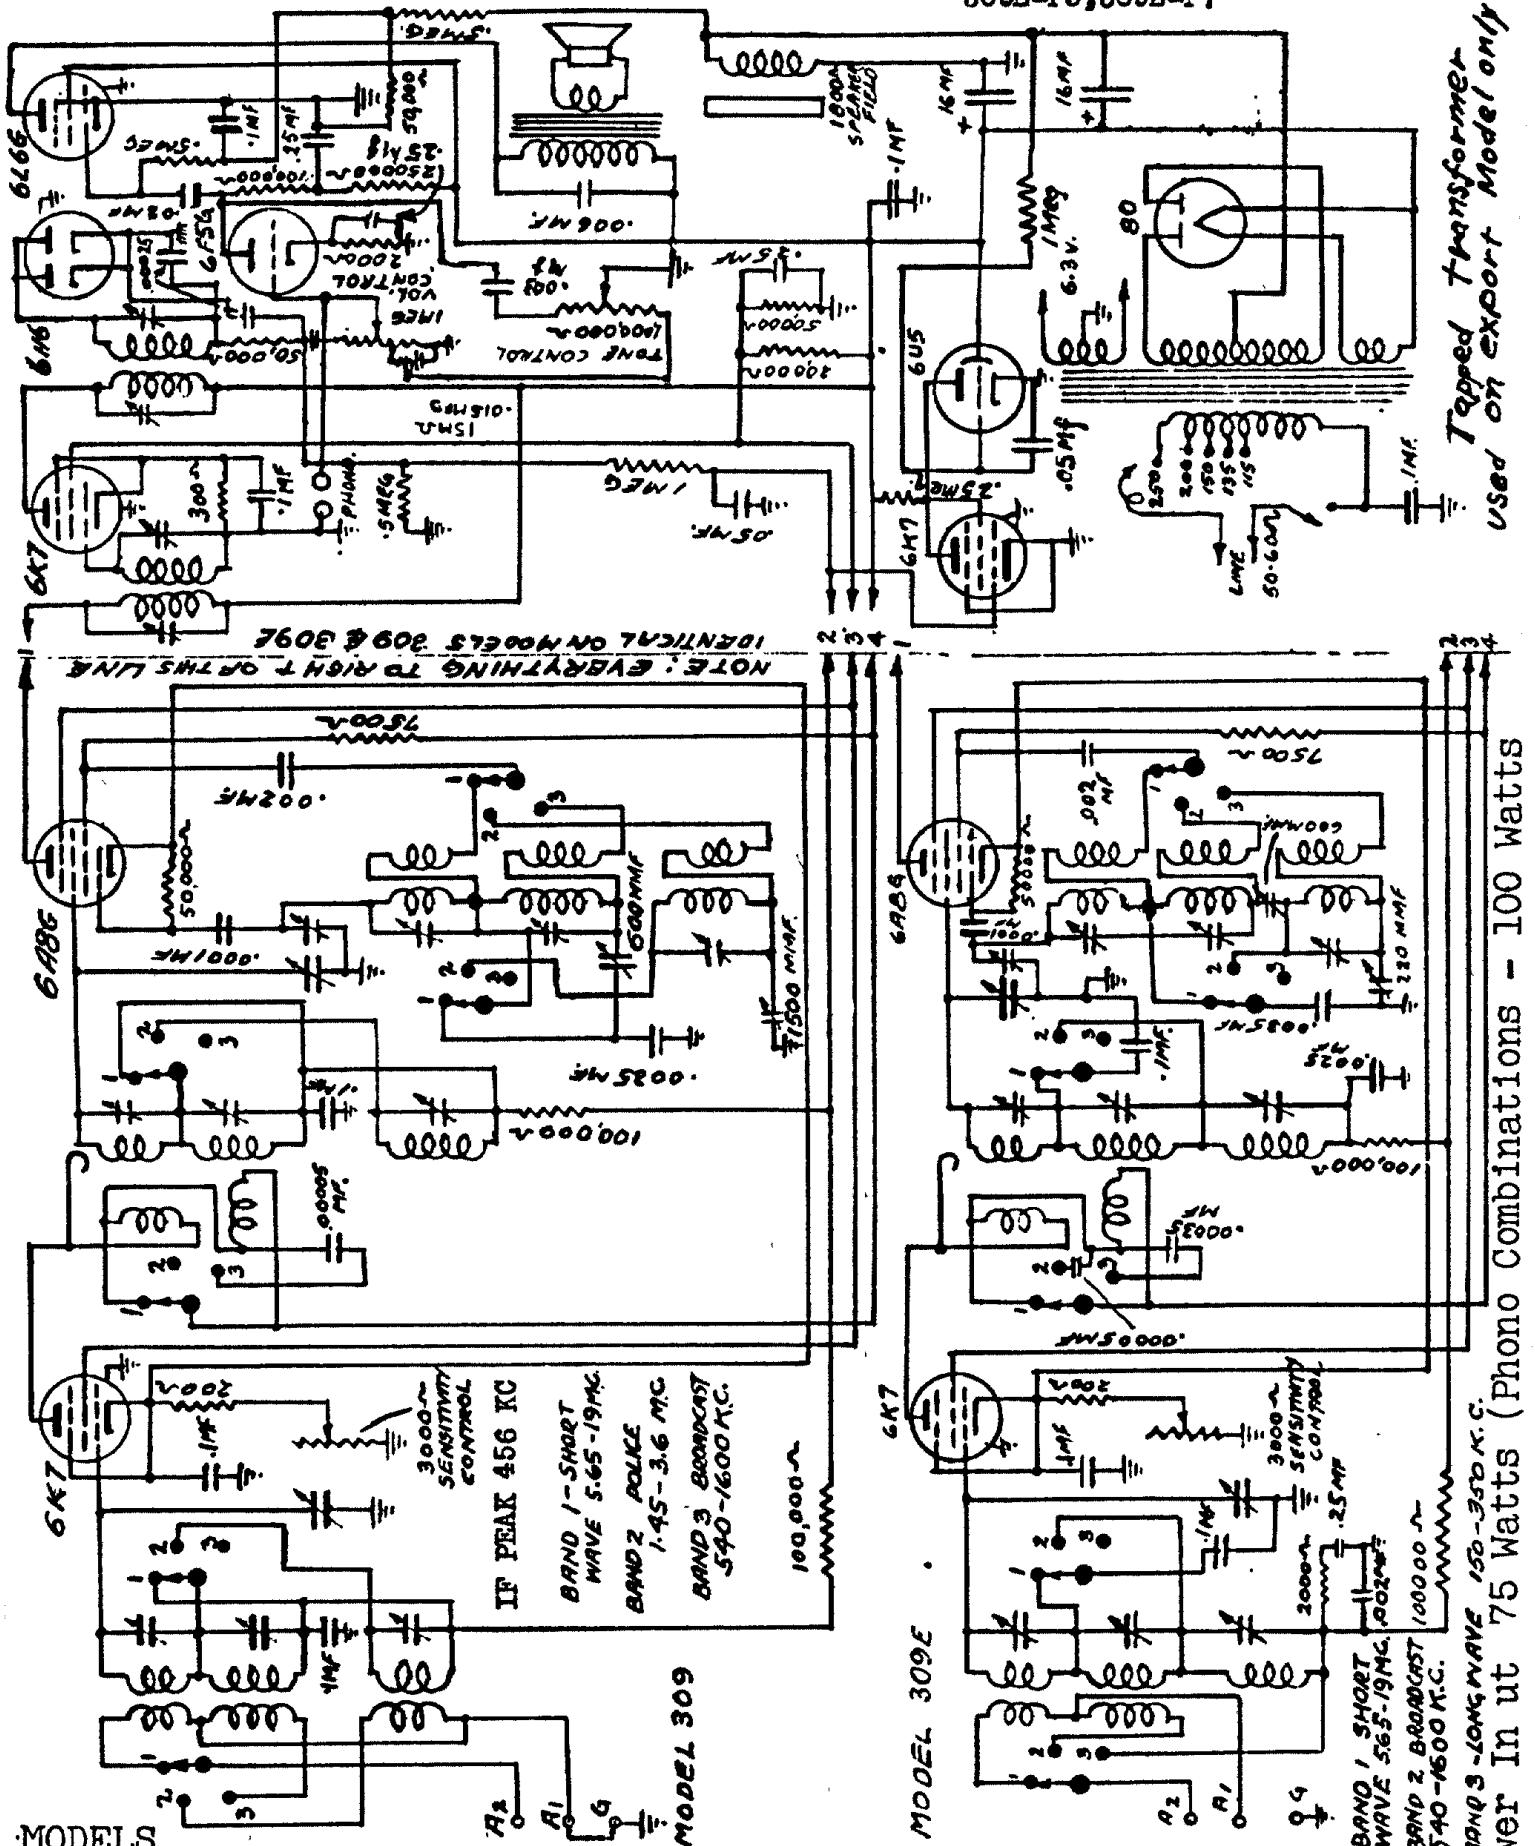

MODELS

309T, 309L, 309 - t, 309E - 1; Consoles 309 - 2, 309 - 3, 309E - 2, 309E - 3, Combinations 309P - 5, 309P - 7, 309E - P5, 309E - P7.

All voltages except filament, are measured from socket terminals to chassis and with a 1000 Ohms per volt voltmeter. The set must be in operation and the sensitivity control in its maximum clockwise position. Wave Band switch in broadcast position.

Filament voltages are taken from filament prong to filament prong at tube socket and may be measured