

EMERSON RADIO & PHONO. CORP.

MODELS L117, L122,
L133, L135,
L141

Chassis L


The tube complement is as follows:

- 1—6A7, oscillator-modulator
- 1—6D6, i-f amplifier
- 1—85, diode detector, a.v.c., a-f amplifier
- 1—41, power output pentode
- 1—80, full-wave rectifier.

Voltage rating 105 to 125 volts, a.c.

Current drain 0.5 amps.

Frequency range ... 540 to 1750 kc, 2200 to 7500 kc.

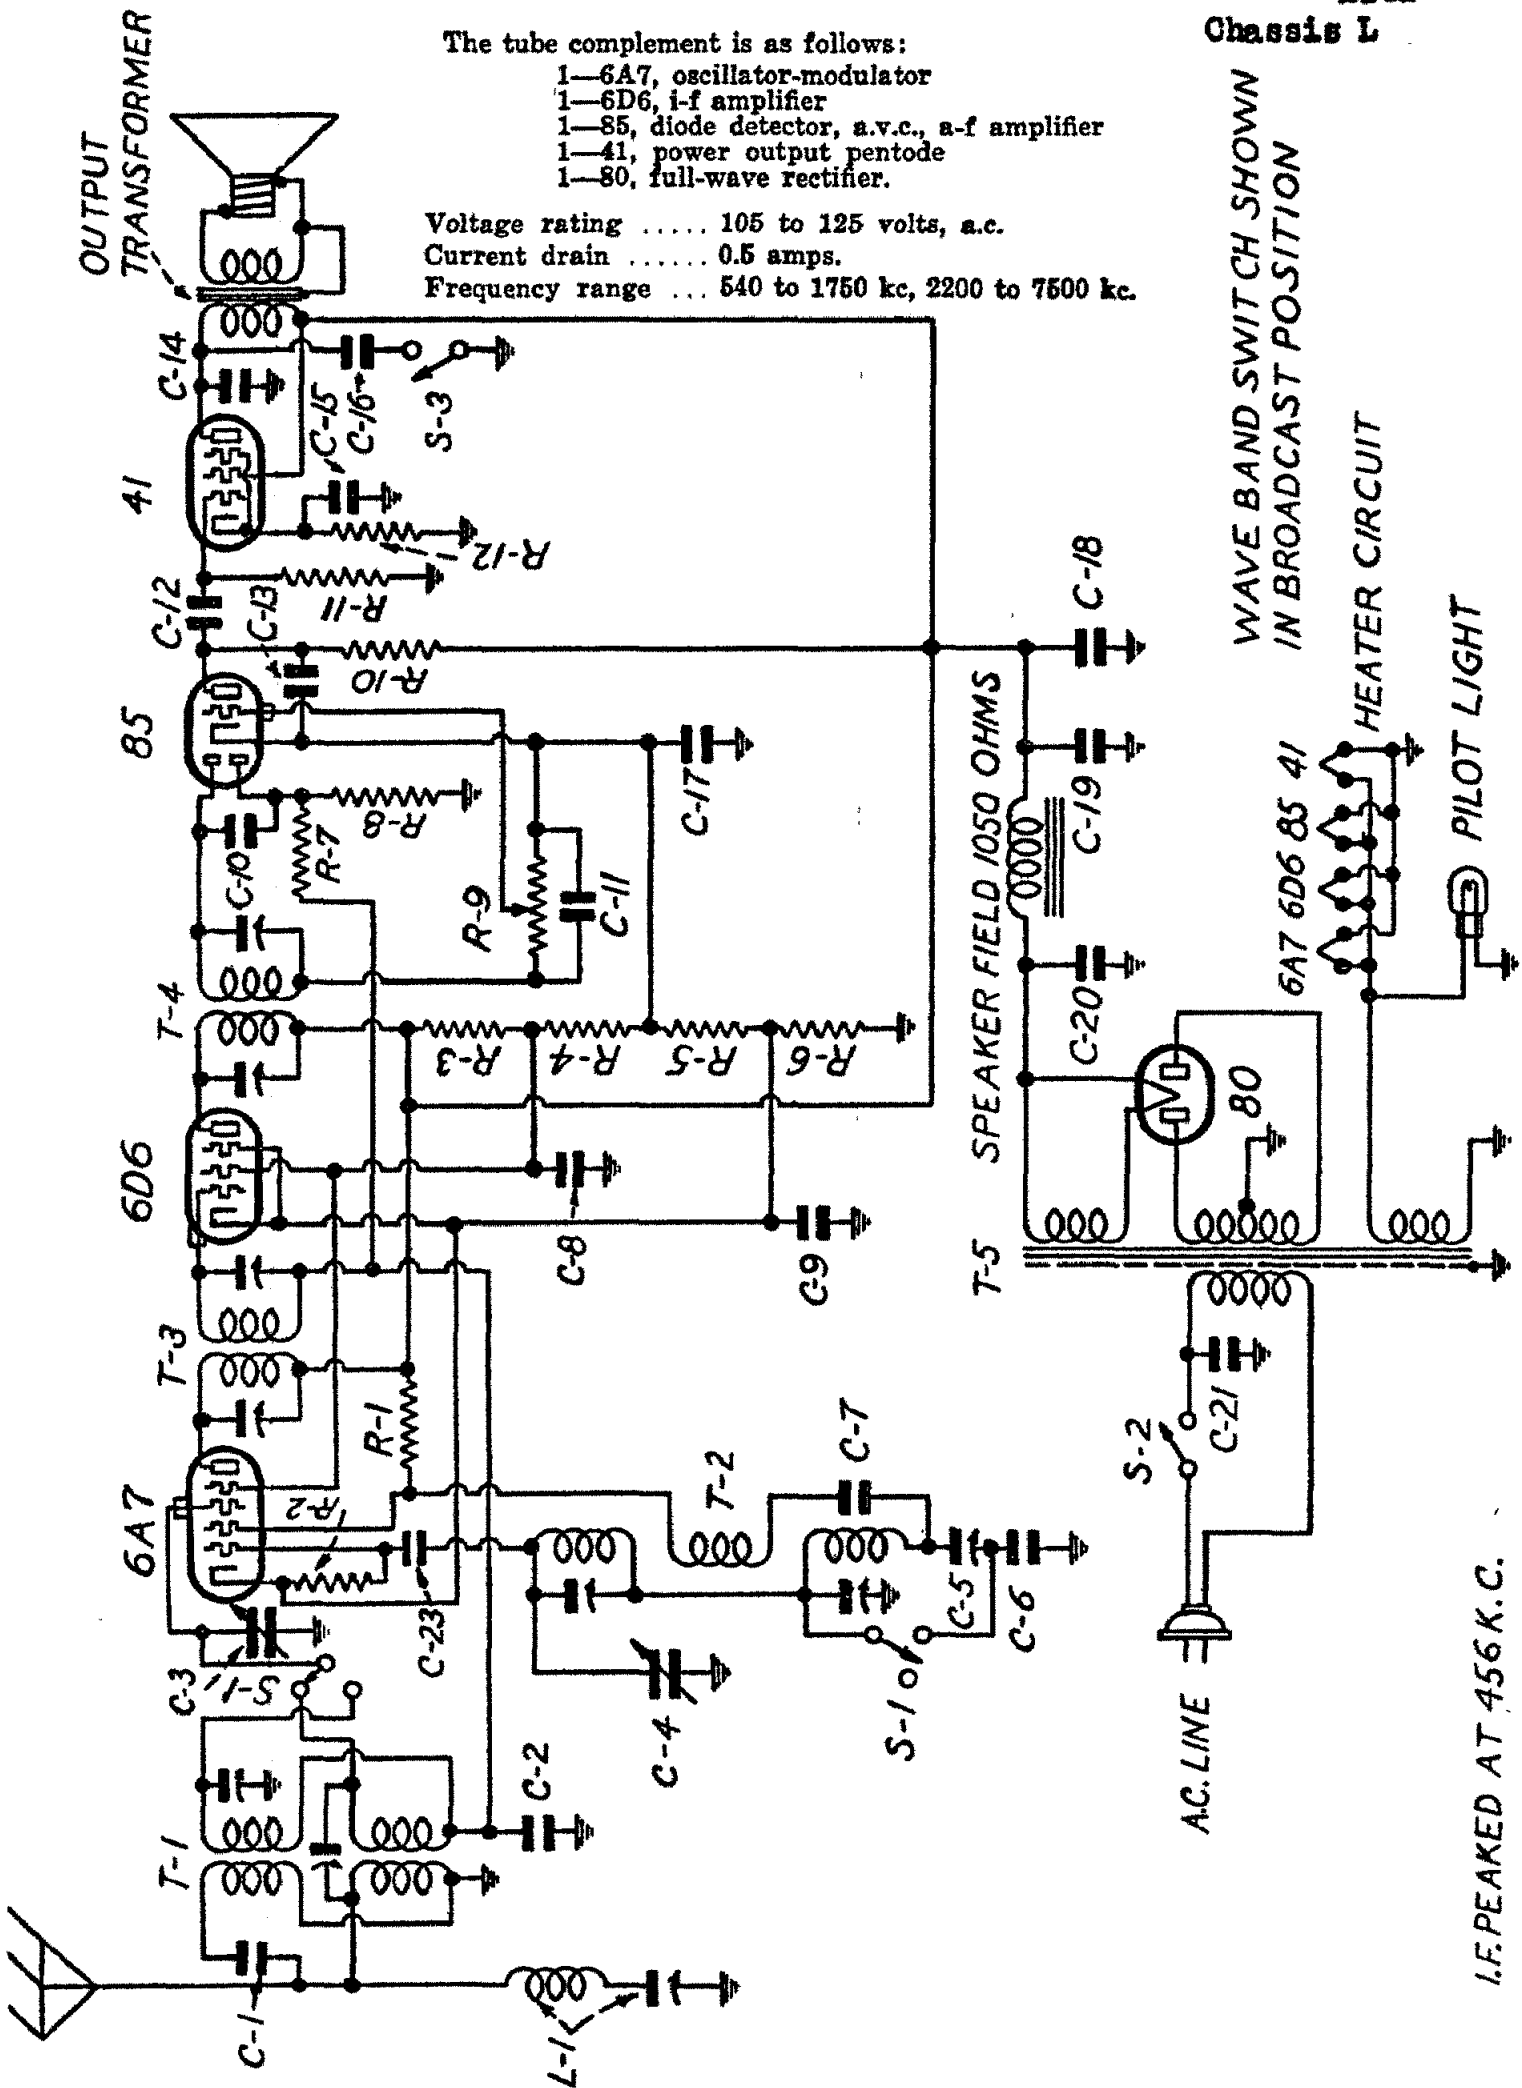


I.F. PEAKED AT 456 K.C.

EMERSON RADIO & PHONO. CORP.

MODELS 117LW, L117LW
L122LW, L133LW
L135LW, L141LW

Chassis K5 & LLW

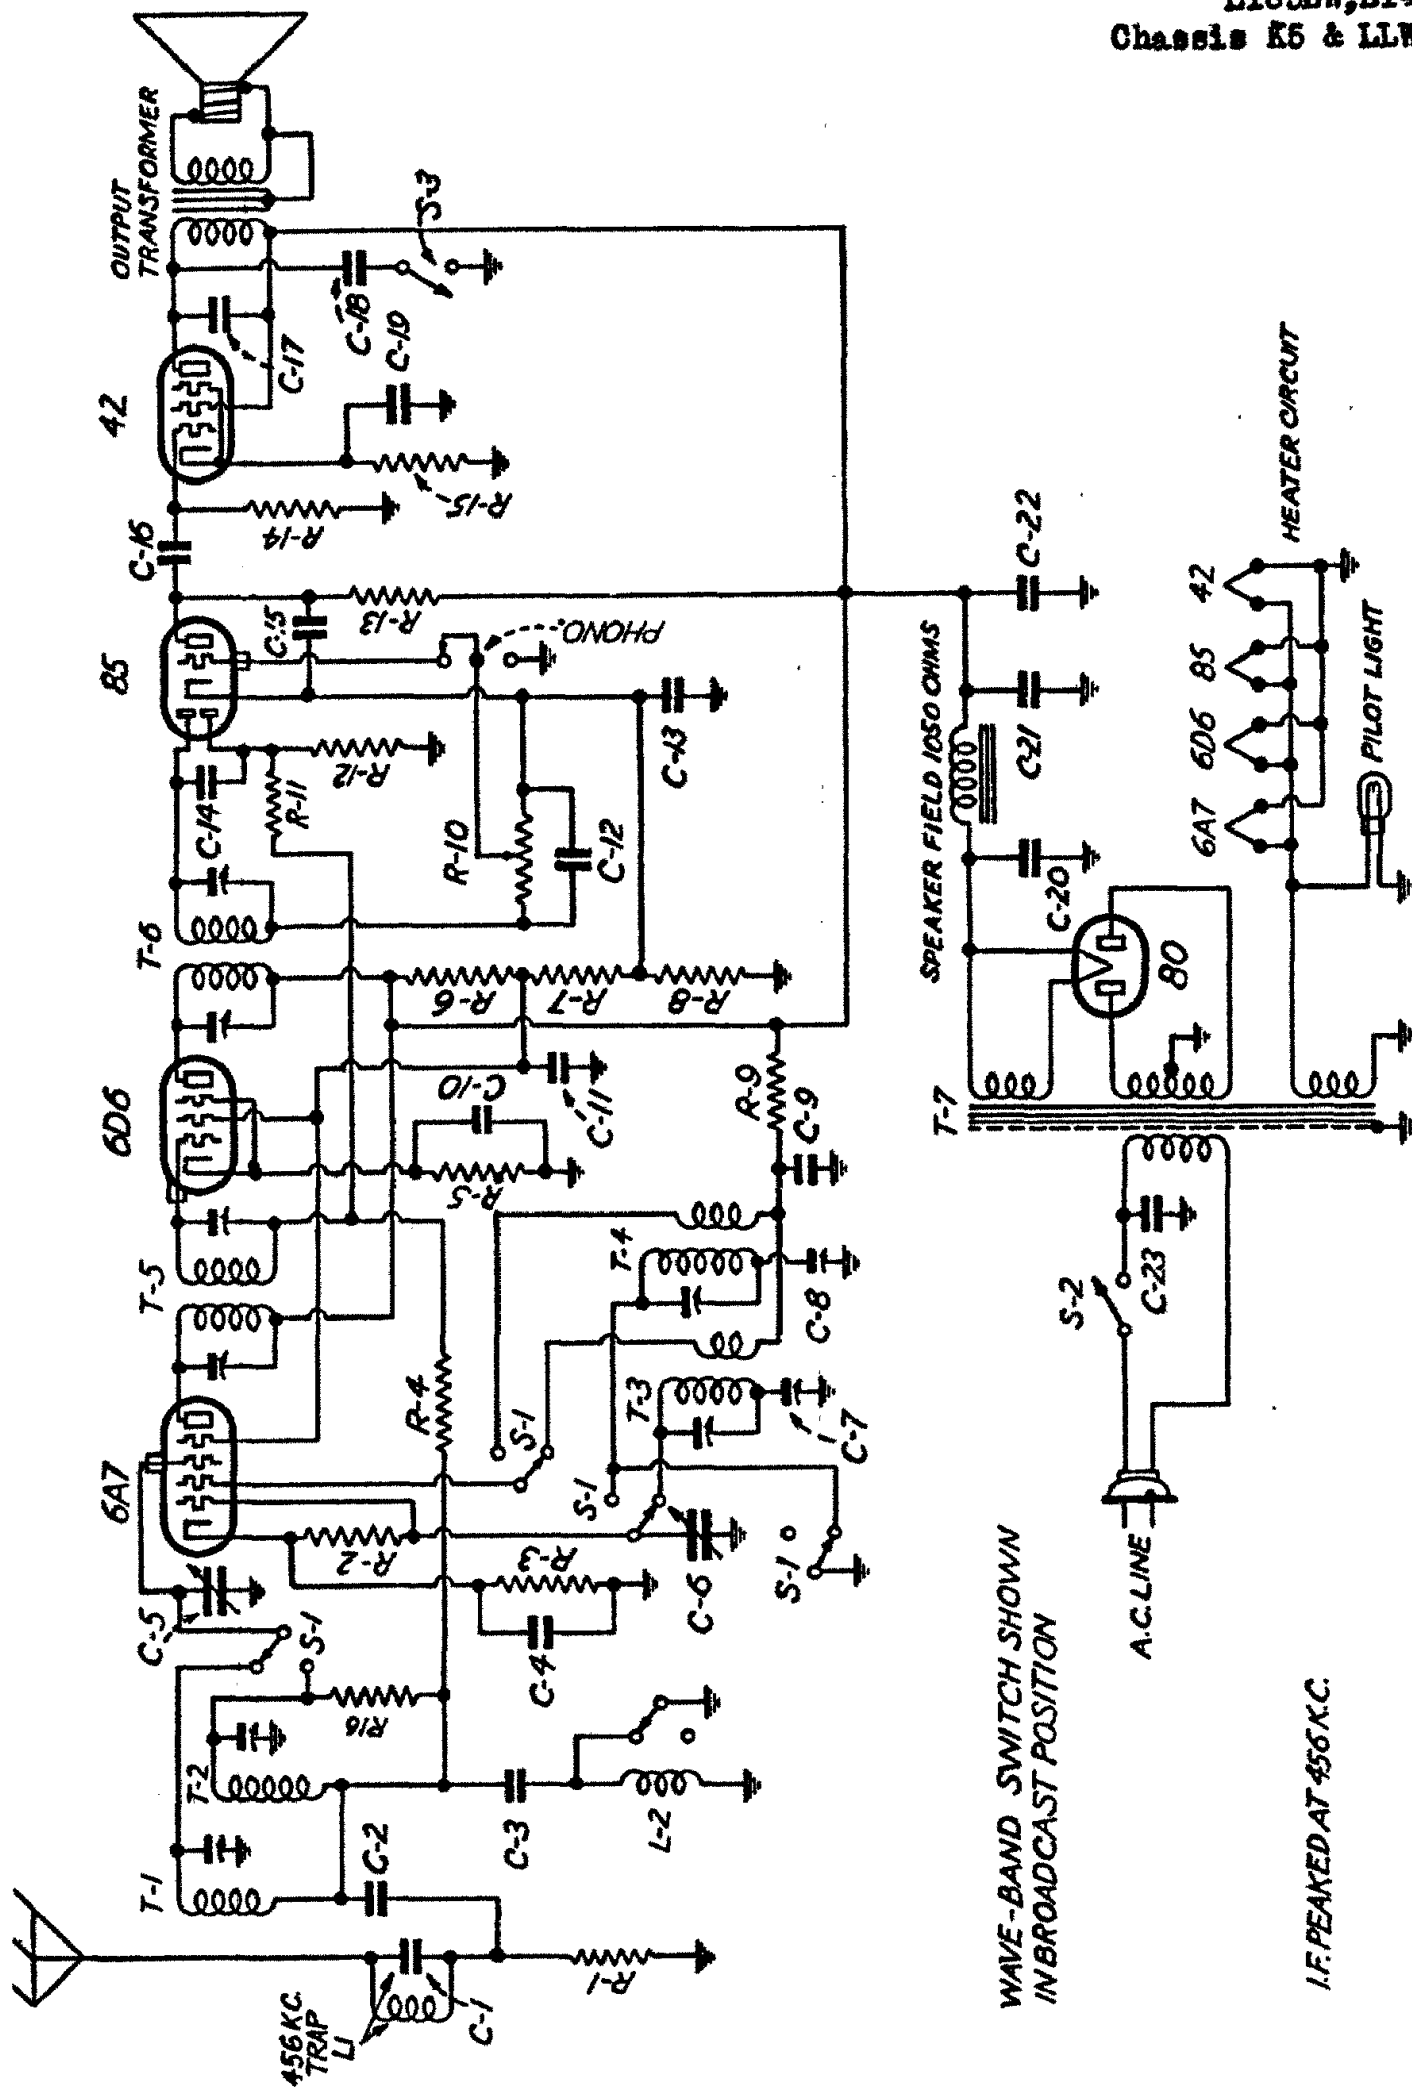

WAVE-BAND SWITCH SHOWN
IN BROADCAST POSITION

I.F. PEAKED AT 456 K.C.