


EMERSON RADIO & PHONO. CORP.

MODELS F117, F122,
F133, F136,
F141

I.F. PEAKED AT
436 K.C.
Chassis P

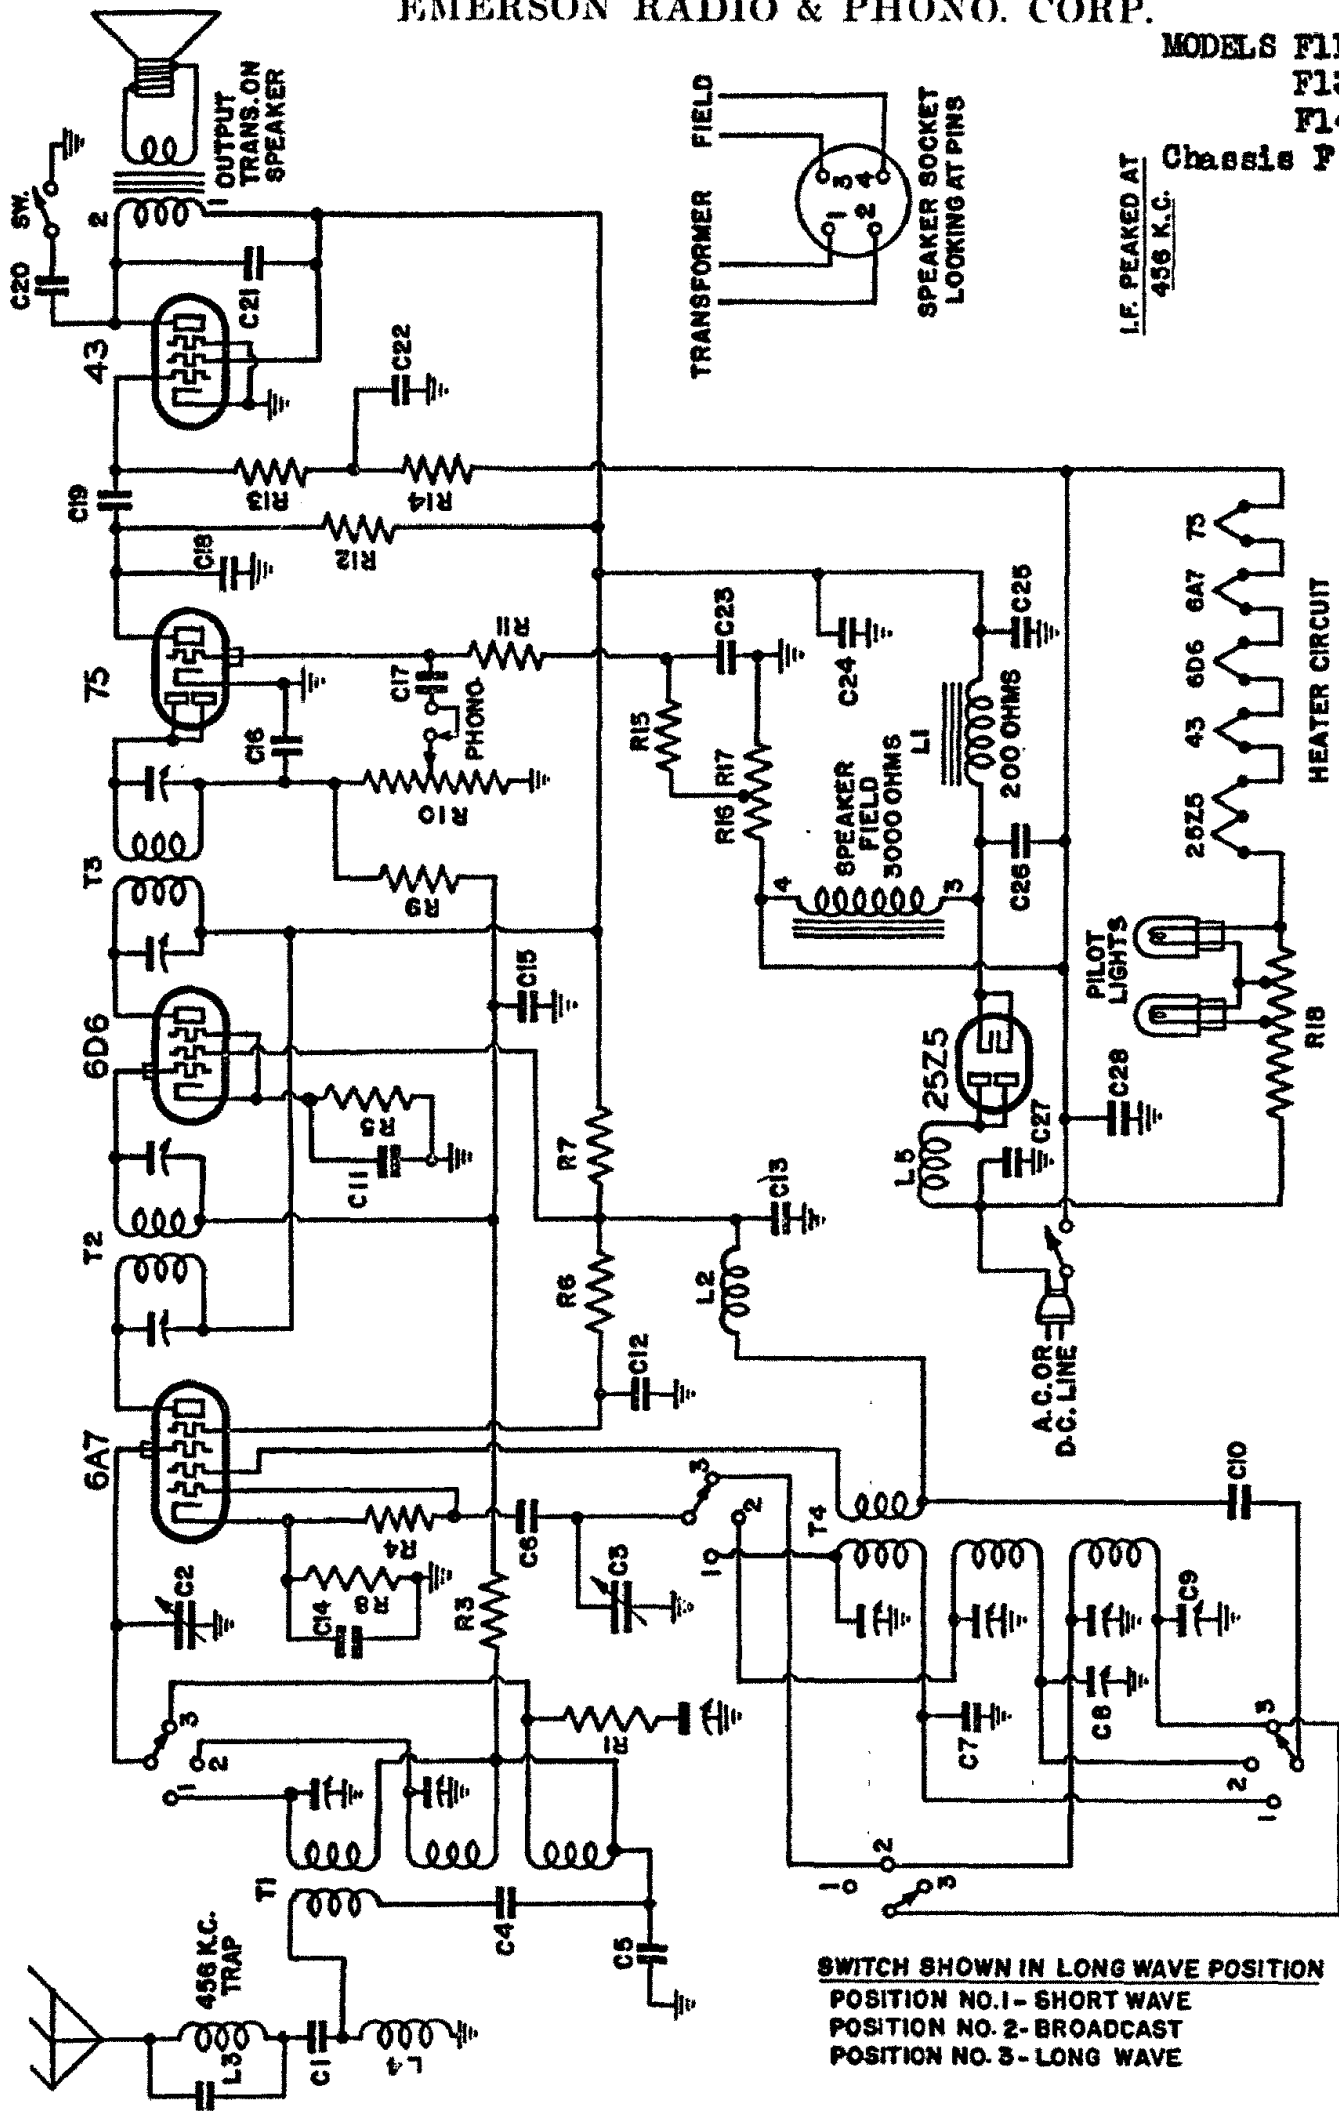

SWITCH SHOWN IN LONG WAVE POSITION
POSITION NO. 1 - SHORT WAVE
POSITION NO. 2 - BROADCAST
POSITION NO. 3 - LONG WAVE

- 1-6A7 pentagrid oscillator-modulator.
- 1-6D6 first i-f amplifier.
- 1-75 diode detector, audio amplifier, automatic volume control.
- 1-43 pentode power output.
- 1-25Z5 dual half-wave rectifier.

Voltage rating 105-125 volts, a.c. or d.c.
Current drain 0.4 amp.
Frequency range 150 to 375 kc, 540 to 1600 kc, 5.7 to 17.5 mc.