



FADA RADIO & ELECTRIC CORP. MODEL 170

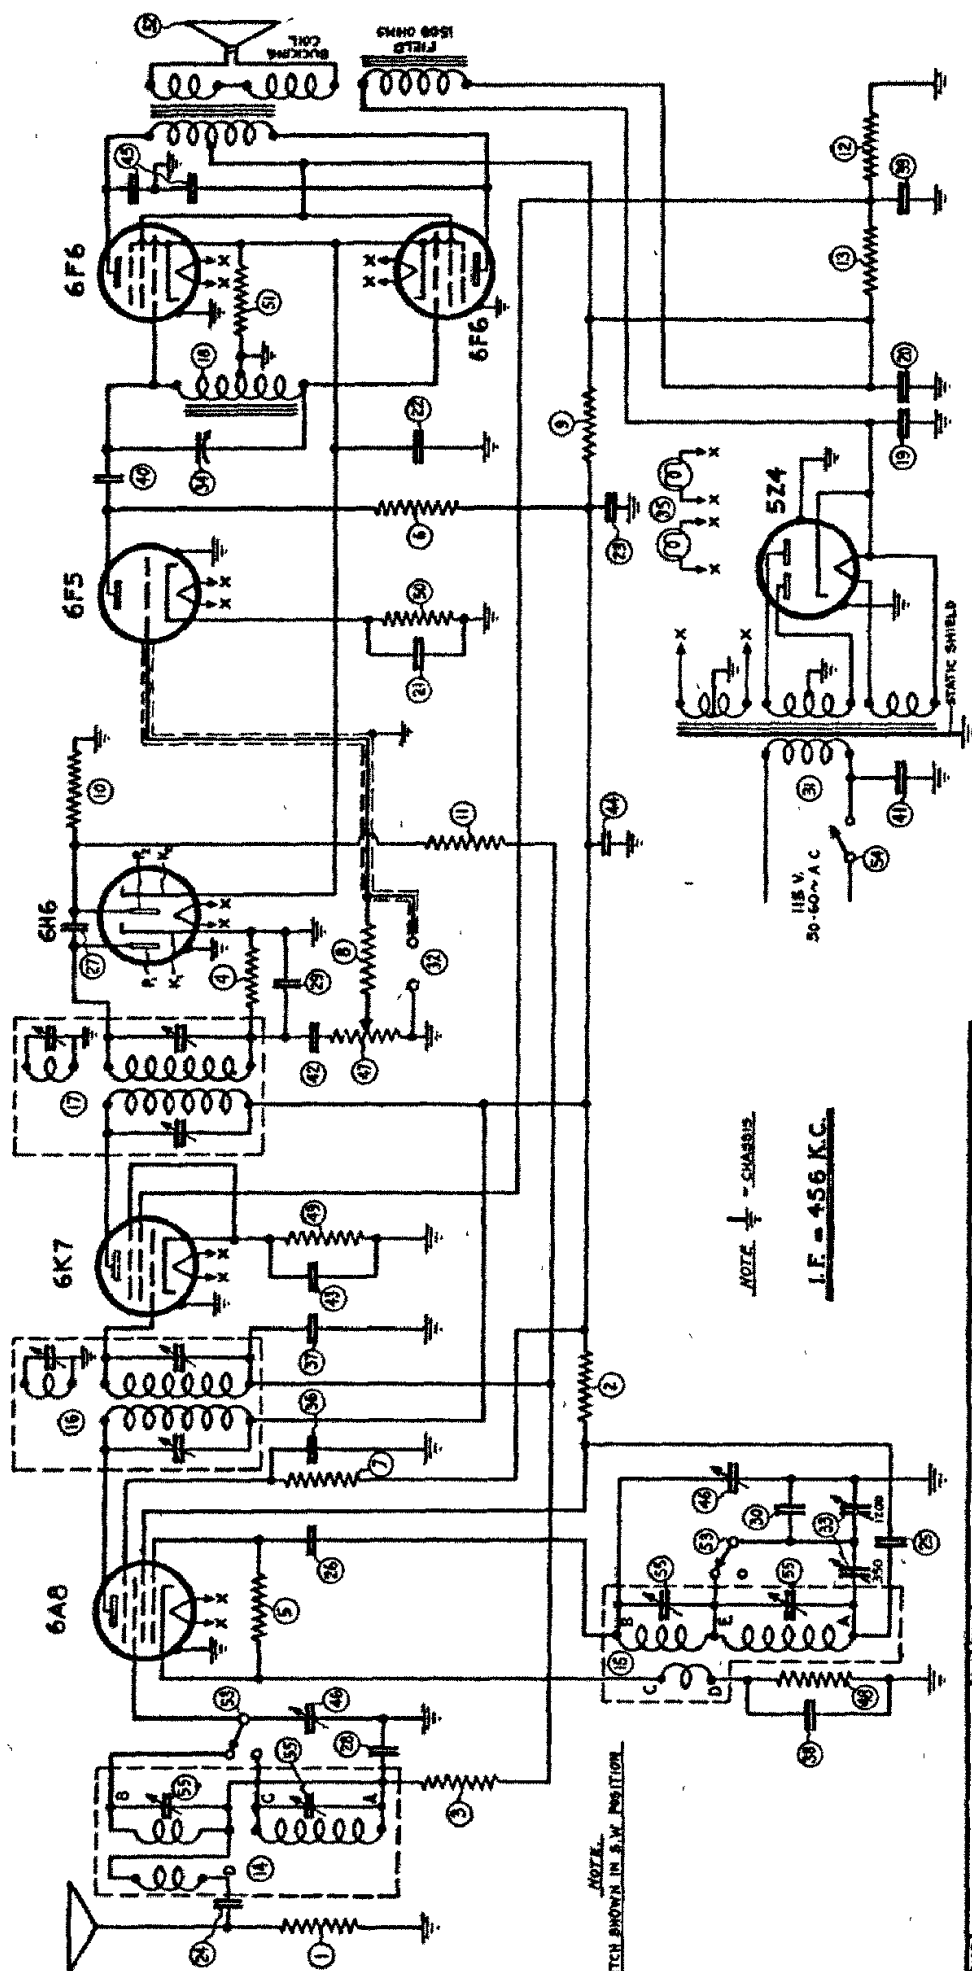

NOTE: - CHASSIS

I.F. = 456 KC.

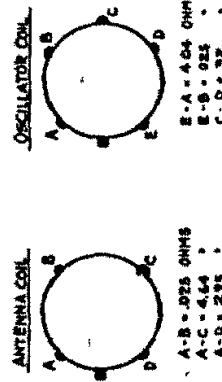

1st I.F. TRANS.
P.L. = 8.5 OHMS
LINE = 13.0
SEC. = 13.0

2nd I.F. TRANS.
P.L. = 8.5 OHMS
LINE = 13.0
SEC. = 13.0

REF. PART NO.	DESCRIPTION	PART NO.	DESCRIPTION	PART NO.	DESCRIPTION
1	30 31 CARB. RES. 10,000 OHMS - 1/2 W.	23	20 34 ELECTRO COND. - 5 MFD. 450 V.	45	10 17 TUBULAR COND. - DUAL - 50-150 V.
2	20 31 CARB. RES. 10,000 OHMS - 1/2 W.	24	15 17 MICA COND. .002 MFD. 7 1/2 V.	46	25 45 VARIABLE COND.
3	30 30 CARB. RES. 250,000 OHMS - 1/2 W.	25	15 17 MICA COND. .002 MFD. 7 1/2 V.	47	50 11 WIRE RES. - 250 OHMS - 1/2 W.
4	30 30 CARB. RES. 250,000 OHMS - 1/2 W.	26	15 17 MICA COND. .002 MFD. 7 1/2 V.	48	130 5 WIRE RES. - 250 OHMS - 1/2 W.
5	30 30 CARB. RES. 250,000 OHMS - 1/2 W.	27	15 17 MICA COND. .002 MFD. 7 1/2 V.	49	130 5 WIRE RES. - 250 OHMS - 1/2 W.
6	30 30 CARB. RES. 250,000 OHMS - 1/2 W.	28	15 17 MICA COND. .002 MFD. 7 1/2 V.	50	130 5 WIRE RES. - 250 OHMS - 1/2 W.
7	30 30 CARB. RES. 250,000 OHMS - 1/2 W.	29	15 17 MICA COND. .002 MFD. 7 1/2 V.	51	130 5 WIRE RES. - 250 OHMS - 1/2 W.
8	30 30 CARB. RES. 250,000 OHMS - 1/2 W.	30	15 17 MICA COND. .002 MFD. 7 1/2 V.	52	105 7 SPEAKER - 1500
9	30 30 CARB. RES. 250,000 OHMS - 1/2 W.	31	15 17 MICA COND. .002 MFD. 7 1/2 V.	53	45 18 BAND SWITCH
10	30 30 CARB. RES. 250,000 OHMS - 1/2 W.	32	15 17 MICA COND. .002 MFD. 7 1/2 V.	54	ON-OFF - ON VOL. CONT.
11	30 30 CARB. RES. 250,000 OHMS - 1/2 W.	33	15 17 MICA COND. .002 MFD. 7 1/2 V.	55	MIN ADJ. ON COIL
12	30 30 CARB. RES. 250,000 OHMS - 1/2 W.	34	15 17 MICA COND. .002 MFD. 7 1/2 V.		
13	30 30 CARB. RES. 250,000 OHMS - 1/2 W.	35	15 17 MICA COND. .002 MFD. 7 1/2 V.		
14	30 30 CARB. RES. 250,000 OHMS - 1/2 W.	36	15 17 MICA COND. .002 MFD. 7 1/2 V.		
15	30 30 CARB. RES. 250,000 OHMS - 1/2 W.	37	15 17 MICA COND. .002 MFD. 7 1/2 V.		
16	30 30 CARB. RES. 250,000 OHMS - 1/2 W.	38	15 17 MICA COND. .002 MFD. 7 1/2 V.		
17	30 30 CARB. RES. 250,000 OHMS - 1/2 W.	39	15 17 MICA COND. .002 MFD. 7 1/2 V.		
18	30 30 CARB. RES. 250,000 OHMS - 1/2 W.	40	15 17 MICA COND. .002 MFD. 7 1/2 V.		
19	30 30 CARB. RES. 250,000 OHMS - 1/2 W.	41	15 17 MICA COND. .002 MFD. 7 1/2 V.		
20	30 30 CARB. RES. 250,000 OHMS - 1/2 W.	42	15 17 MICA COND. .002 MFD. 7 1/2 V.		
21	30 30 CARB. RES. 250,000 OHMS - 1/2 W.	43	15 17 MICA COND. .002 MFD. 7 1/2 V.		
22	30 30 CARB. RES. 250,000 OHMS - 1/2 W.	44	15 17 MICA COND. .002 MFD. 7 1/2 V.		

FADA RADIO & ELECTRIC CO.
Larchmont, N.Y.

MODEL 170

DATE: 6-27-35

APPROVED: [Signature]