
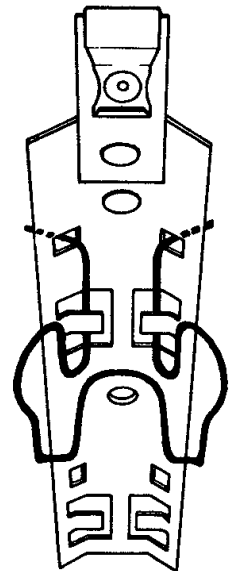
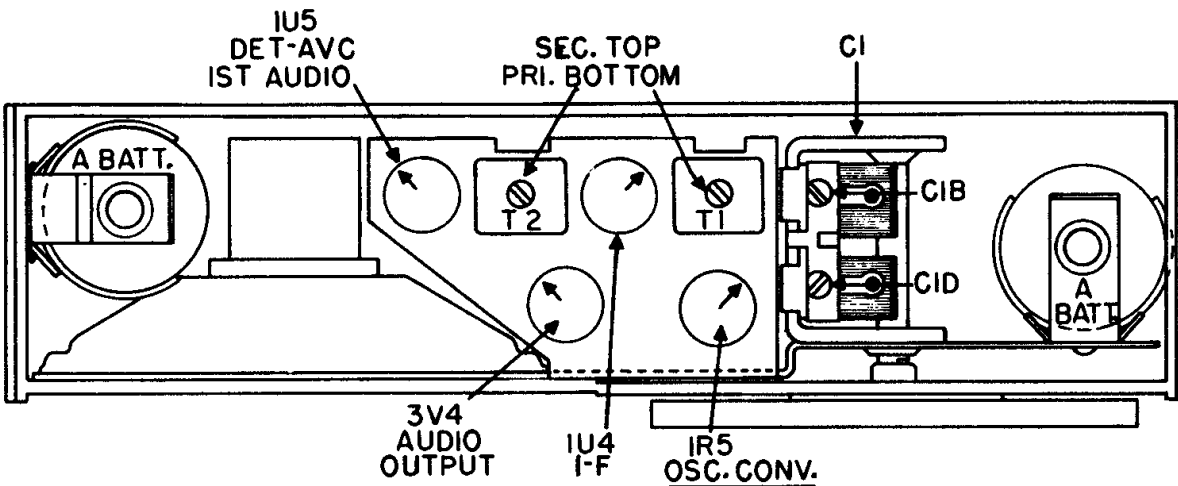


GENERAL ELECTRIC

MODEL 620, 621 AND 622 PORTABLE RADIO RECEIVERS

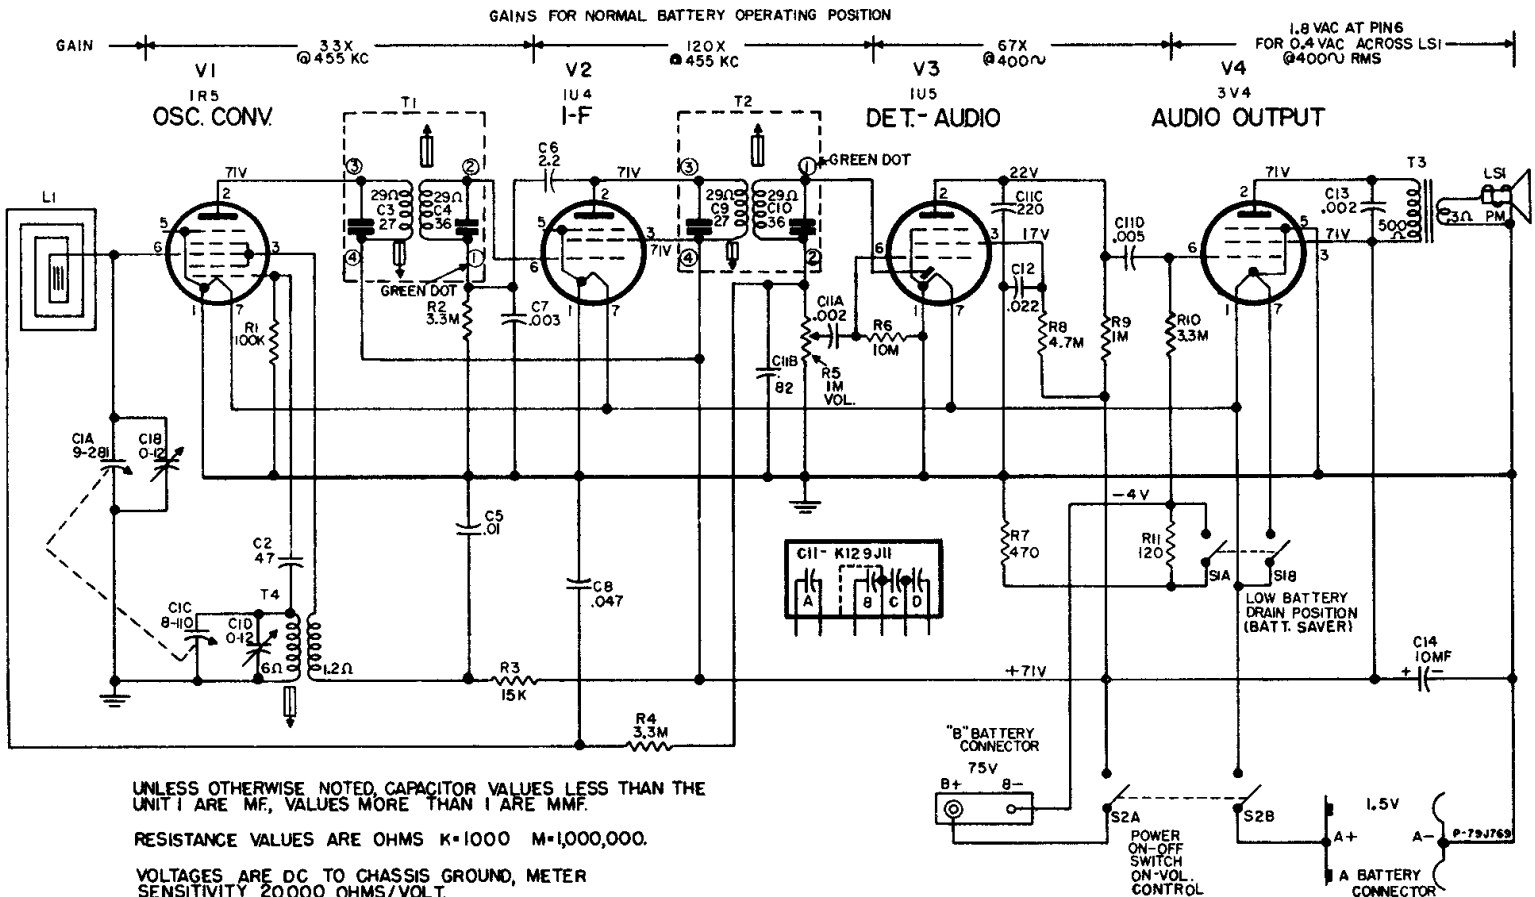

Move clips to the center set of holes for use with flash light cells.

CAPACITORS

*RCC-121	C5	.01 mf., 200 v., paper
*RCC-122	C8	.047 mf., 200 v., paper
*RCC-123	C12	.022 mf., 200 v., paper
RCE-172	C14	10 mf., electrolytic
RCN-082	C11A, B, C, D	Ceramic Bullplate
RCT-075	C1	Tuning
*RCW-3075	C2	47 mmf., ceramic
*RCW-3078	C6	2.2 mmf., ±5%, 500 v., ceramic
RCW-3118	C7	.003 mf., ±5%, 500 v., ceramic
RCW-3119	C13	.002 mf., ±5%, 500 v., ceramic

RESISTORS

RRC-239	R5, S2A, B	VOLUME CONTROL & SWITCH - 1 megohm
*URD-027	R11	120 ohms, carbon
*URD-041	R7	470 ohms, carbon
*URD-061	R2, 4, 10	3.3 K, carbon
*URD-077	R3	15 K, carbon
*URD-097	R1	100 K, carbon
*URD-121	R9	1 megohm, carbon
*URD-137	R8	4.7 megohms, carbon
*URD-145	R6	10 megohms, carbon