


SEARS, ROEBUCK and CO.

CHASSIS NUMBER 528.46500

MODEL 7018

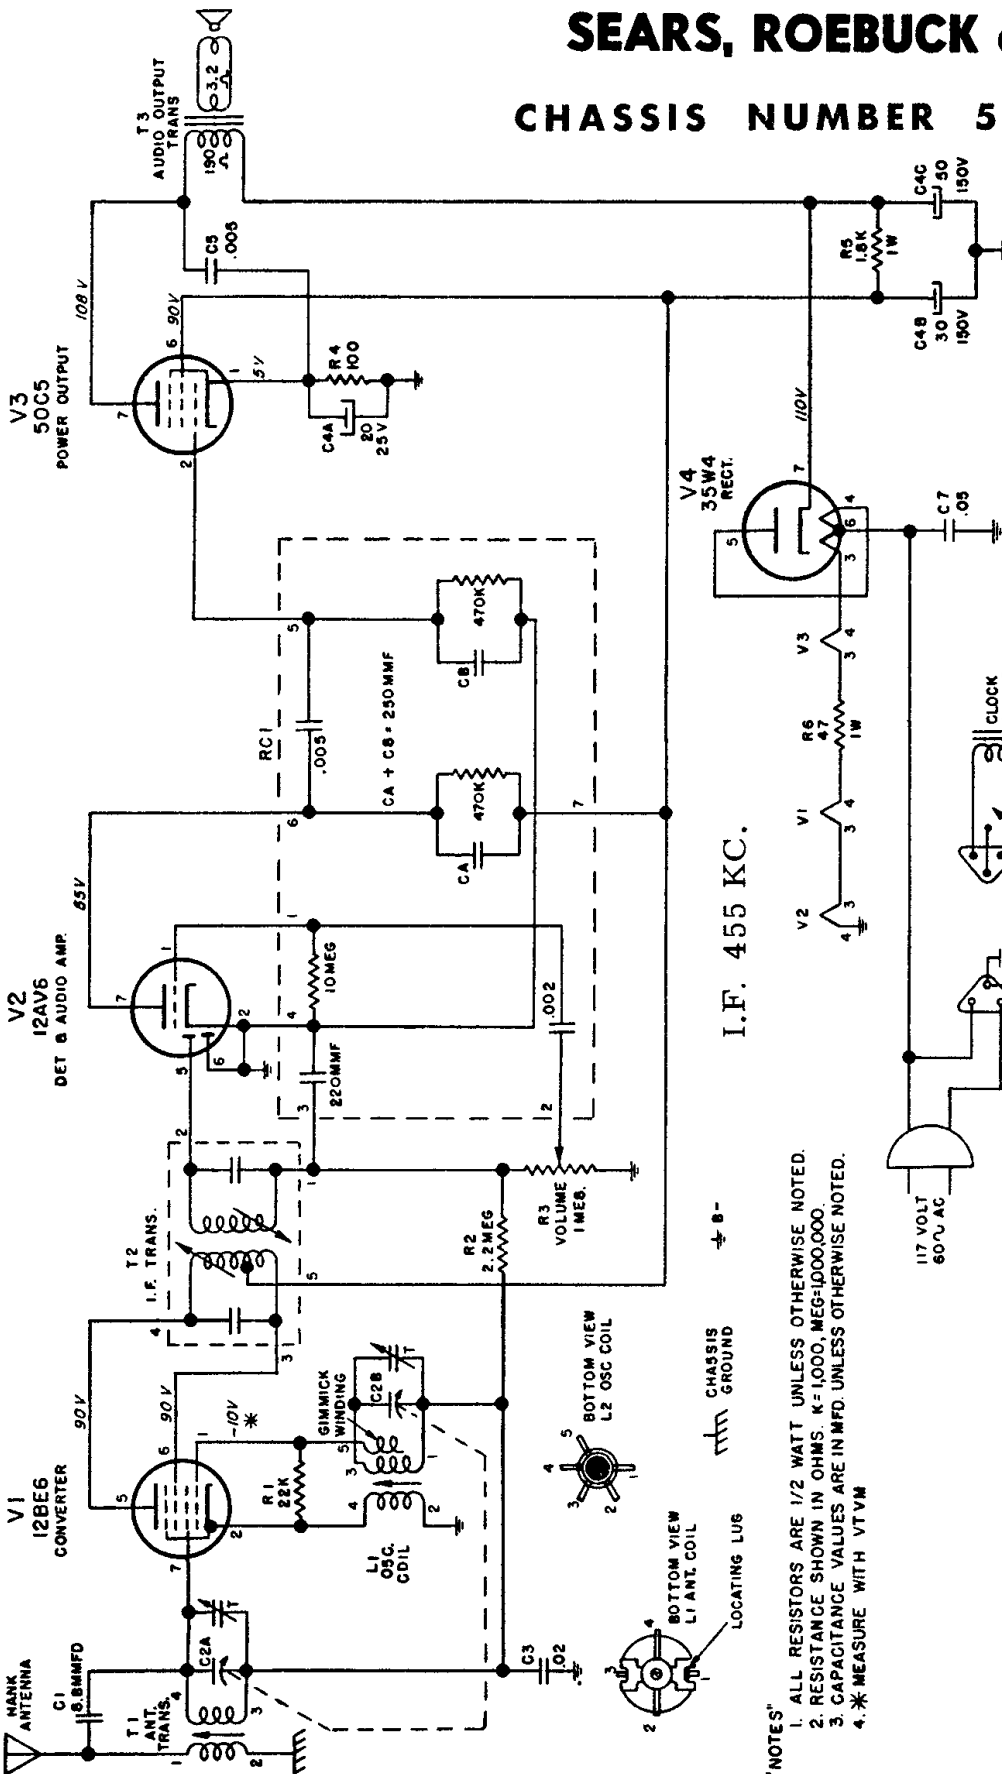

I.F. 455 KC.

CHASSIS GROUND

- *NOTES*
1. ALL RESISTORS ARE 1/2 WATT UNLESS OTHERWISE NOTED.
 2. RESISTANCE SHOWN IN OHMS. K=1,000, MEG=1,000,000.
 3. CAPACITANCE VALUES ARE IN MFD. UNLESS OTHERWISE NOTED.
 4. * MEASURE WITH VTVM

RESISTORS

(All resistors 1/2 w., 10% unless otherwise noted)


R1	60-22302	22K ohm, 20%
R2	60-22502	2.2 megohm, 20%
R3	24-237	1 megohm, VOLUME
R4	60-10102	100 ohm, 20%
R5	60-18211	1.8K ohm, 1 w.
R6	60-47011	47 ohm, 1 w.
RC1	13-10-3	Couplate (PC-159)



BOTTOM VIEW OF TUBE SOCKETS SHOWING TERMINAL NUMBERING

SCHEMATIC LOCATION	PART NUMBER	DESCRIPTION
C1	20-27-0	Tubular, Gimmick, 6.8 mmfd., 500 v., 10%
C2 A & B	19-252	Variable, TUNING
C3, C6	16-20343	Tubular, .02 mfd., 400 v.
C4 A, B, & C	18-21-2	Electrolytic, 20 mfd., 25 v., (A); 30 mfd., 150 v. (B); 50 mfd., 150 v. (C)
C5	15-50216	Disc, .005 mfd., 500 v., GP
C7	16-50343	Tubular, .05 mfd., 400 v.

CAPACITORS

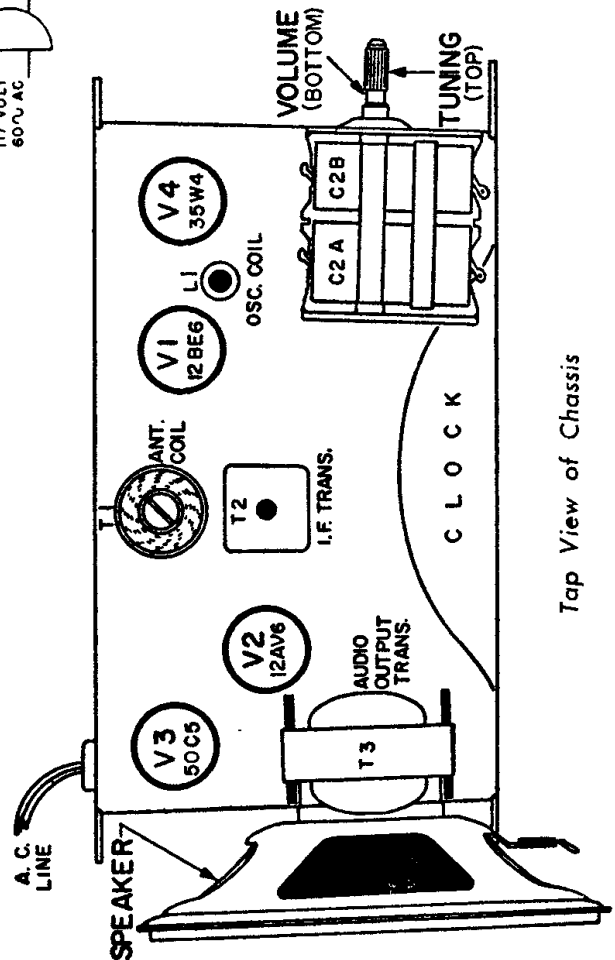

Tap View of Chassis