


MODELS 284W, 284I, 284NI, 284NA,
1U-284W, 1U-284I, 1U-284NI, SENTINEL RADIO CORP.
1U-284NA

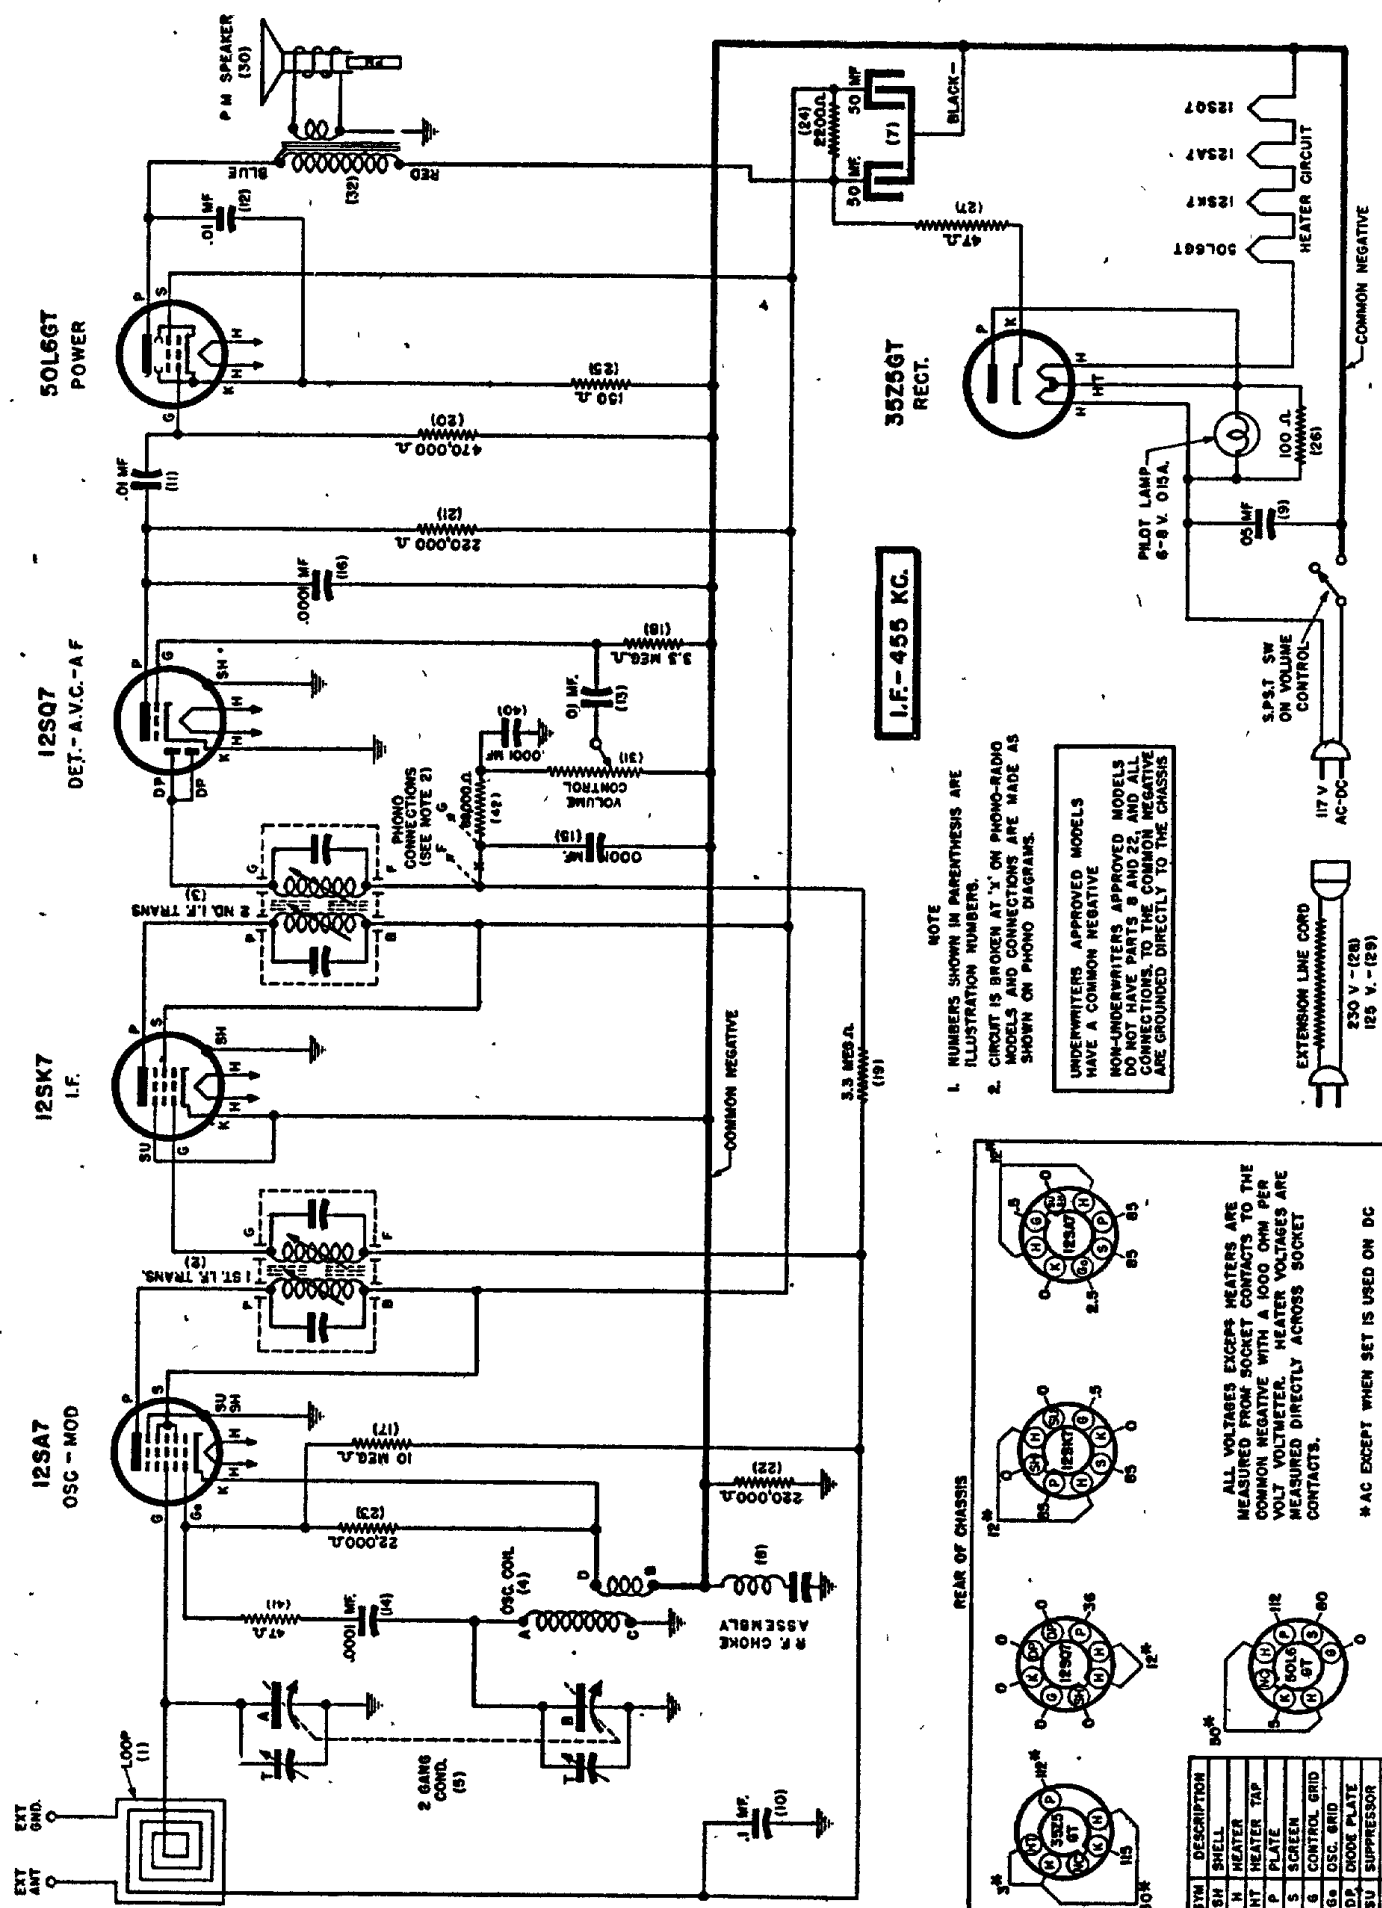

I.F. - 455 KC.

- NOTE
- 1. NUMBERS SHOWN IN PARENTHESIS ARE ILLUSTRATION NUMBERS.
 - 2. CIRCUIT IS BROKEN AT 'X' ON PHONO-RADIO MODELS AND CONNECTIONS ARE MADE AS SHOWN ON PHONO DIAGRAMS.

UNDERWRITERS APPROVED MODELS HAVE A COMMON NEGATIVE

NON-UNDERWRITERS APPROVED MODELS DO NOT HAVE PARTS 8 AND 22, AND ALL CONNECTIONS TO THE COMMON NEGATIVE ARE GROUNDING DIRECTLY TO THE CHASSIS

REAR OF CHASSIS

ALL VOLTAGES EXCEPT HEATERS ARE MEASURED FROM SOCKET CONTACTS TO THE COMMON NEGATIVE WITH A 1000 OHM PER VOLT VOLTMETER. HEATER VOLTAGES ARE MEASURED DIRECTLY ACROSS SOCKET CONTACTS.

*AC EXCEPT WHEN SET IS USED ON DC

SYM	DESCRIPTION
SH	SHELL
H	HEATER
HT	HEATER TAP
P	PLATE
S	SCREEN
G	CONTROL GRID
GA	OSC. GRID
DP	DIODE PLATE
SU	SUPPRESSOR
K	CATHODE
NC	NO CONNECTION

VOLTAGE TABLE
(BOTTOM VIEW OF CHASSIS)