
12SA7GT
OSC-TRANS12SK7GT
LR12SQ7GT
DET-ABC-A.F.50L6GT
OUTPUT

Tube sockets are viewed from under side of chassis. Voltage readings shown at socket prongs are to floating ground and are taken with a 20,000 ohm per volt meter, with radio phono switch in radio position and with line voltage at 117 volts. Where no reading is given the voltage is zero or too low to read. Symbols are in accordance with A.S.A. standards Z32.5 and Z32.10 unless otherwise stated. K=1,000 ohms. M=1,000,000 ohms.

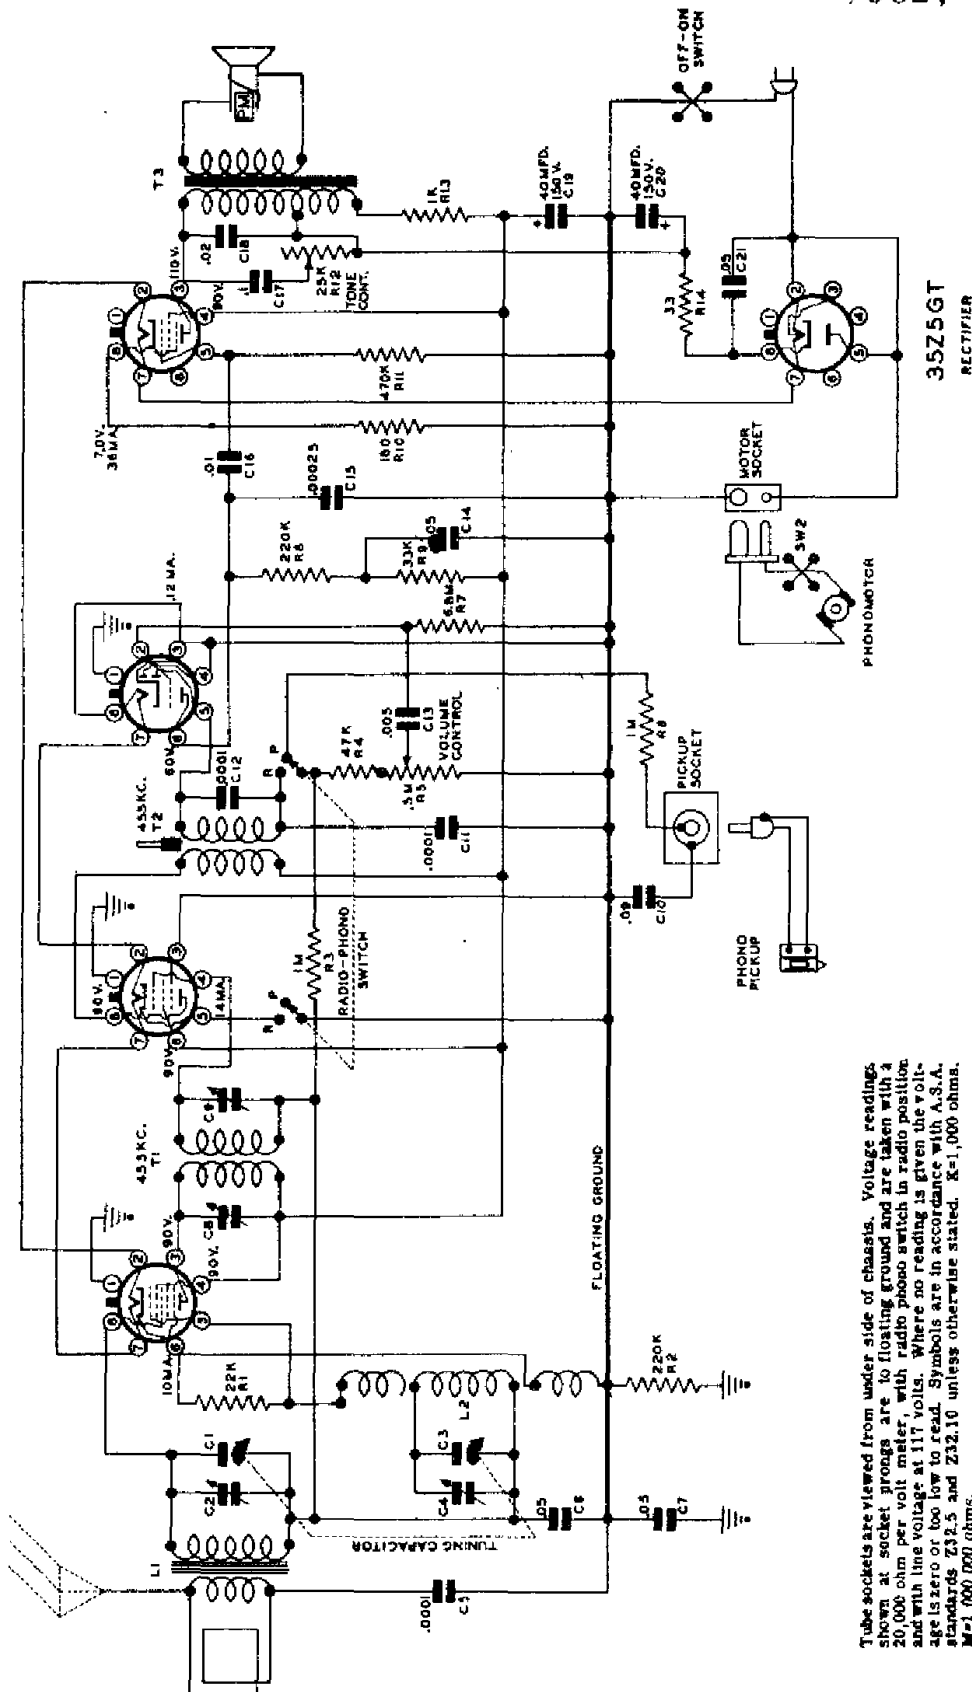